

AC Dimming Wall Station

Simple Setup

Supports easy-to-change grouping, zones, scheduling, timers and scenes

Preset Dimming

4 button dimming set to 25, 50, 75 and 100% plus trim up/down and OFF

AC & Battery-Powered Options

AC 110-277V version or 10+ year replaceable battery versions available

Easy, Quick Networking with Wireless Dimming

Replaceable Button Faces

Replace button faces for custom created scenes or dimming levels

Fits Standard Decora

Screwless cover plate provided and fits standard Decora wall box and multi gang trim plates

PRODUCT OVERVIEW

Avi-on AC-powered wall stations are available for new construction and retrofit needs. All controls interface to lighting fixtures and with the Avi-on App, providing a platform that supports easy-to-change grouping, scheduling, timers and scenes.

Features

- AC 110-277V version
- 4 buttons plus trim up/down and OFF
- Preset Dimming wall station percentages set to 25, 50, 75 and 100. Also configurable scene control if desired
- Continuously powered device helps form a full building wireless mesh network
- Replaceable button faces
- Fits standard Decora wall box and multi gang trim plates (only fits square mud rings not rounded or beveled)
- Screwless cover plate also provided

Common Specifications

- Indoor use only (spray resistant cover plate available for food service applications)
- Operating Temp: -4 to 122 °F (-20 to 50 °C)
- AC version includes load line air gap disconnect for wired retrofits
- UL Listed

ORDERING INFORMATION

Part Number	Name	Description
AVI-B-2401AC-2	Dimming Wall Station (AC)	Avi-on Scene Controller AC with 25/50/75/100% dimming buttons

To order please contact Avi-on sales at **(877) AVION-US**, (877) 284-6687 or prosales@avi-on.com for information on becoming an Avi-on partner and order details.

Project		Location/Type	
---------	--	---------------	--

SPECIFICATIONS

AC Version

Electrical	Min	Max	Unit
Input Voltage	110	277	V
Input Frequency	47	63	Hz
Amperage	-	5.0	A
Operating Temperature	-4 (-20)	122 (50)	°F (°C)
Storage Temperature	-40 (-40)	185 (85)	°F (°C)

Power Wires	Green	Red	White	Black
16 gauge	GND	Load	Neutral	Line

Case Dimensions (Excluding Wires)

Part	Length	Width	Height
Dimming Wall Station	4.69" (119mm)	2.95" (75mm)	1.57" (40mm)

Materials


Non Ferrous materials (plastic and aluminum)

All materials ROHS compliant


Certifications

Regulatory	Description
USA	FCC ID: 2AFZI-AVIBG21 FCC Part 15, Subpart B (Class B) FCC Part 15.247
Canada	IC ID: 20544-AVIBG21 ICES-003, Issue 7, Oct. 2020 RSS-GEN Issue 5, Feb. 2021 Amendment 2 RSS-247 Issue 2, Feb. 2017
BQB	DID: D063032 Qualified Design ID (QDID): 205509 178212 175341
UL	UL File E519564 UL 60730-1 ED. 5 XACN/XACN7 Touch Lighting Controls

DIMENSIONS

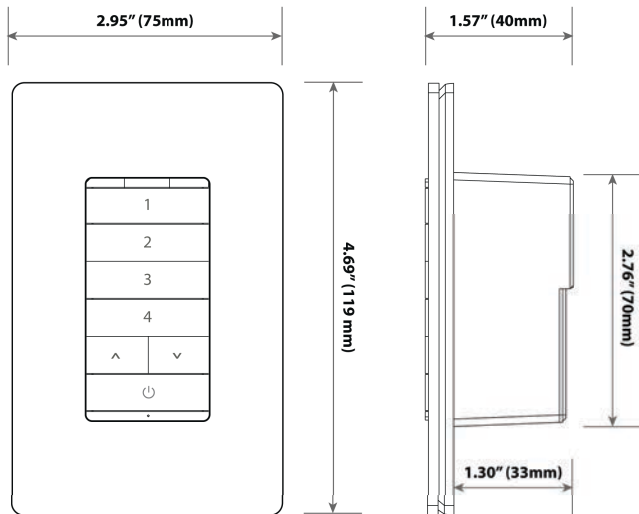

WIRING DIAGRAMS

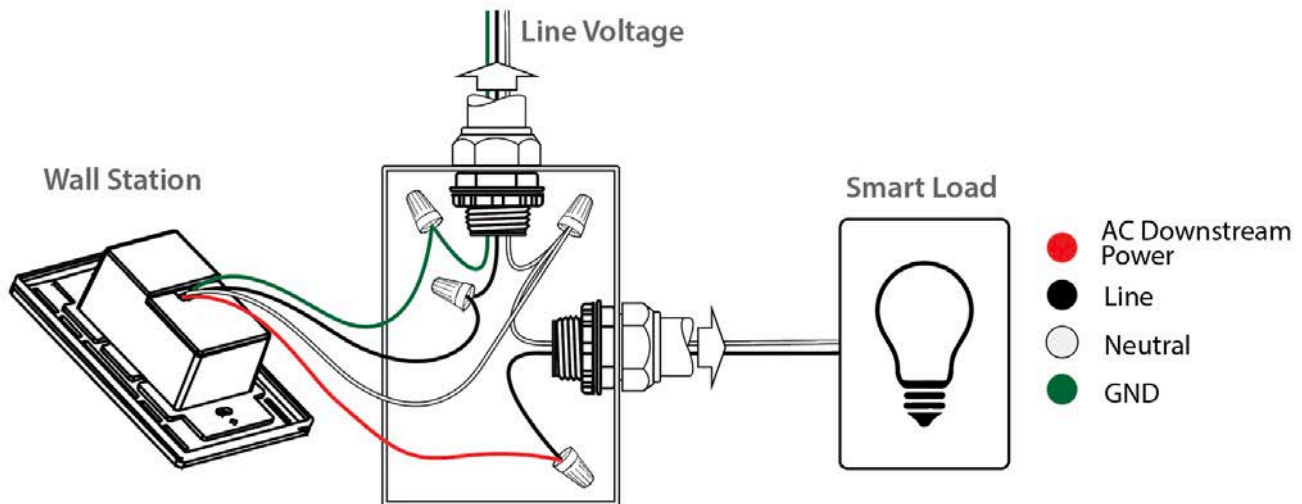

Note: If the switch is not being used to provide AC downstream power, the RED wire must be capped and not used. If AC downstream power is required, connect the downstream (load) hot conductor to the RED wire. AC downstream power is not a switched load. The air-gap tab does not remove power from the smart switch itself; it only interrupts power to the AC downstream circuit (RED wire) for the purpose of servicing loads downstream of the AC source via the air-gap tab.

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE. The information contained herein is believed to be reliable. Avi-on makes no warranty, representation or guarantee regarding the information contained herein, the suitability of the products for any particular purpose, or the continuing production of any product. Avi-on assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein, or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information.

