


Battery 2 Button Wall Station

*Easy, Quick Control with a Simple,
2 Button Paddle Design*

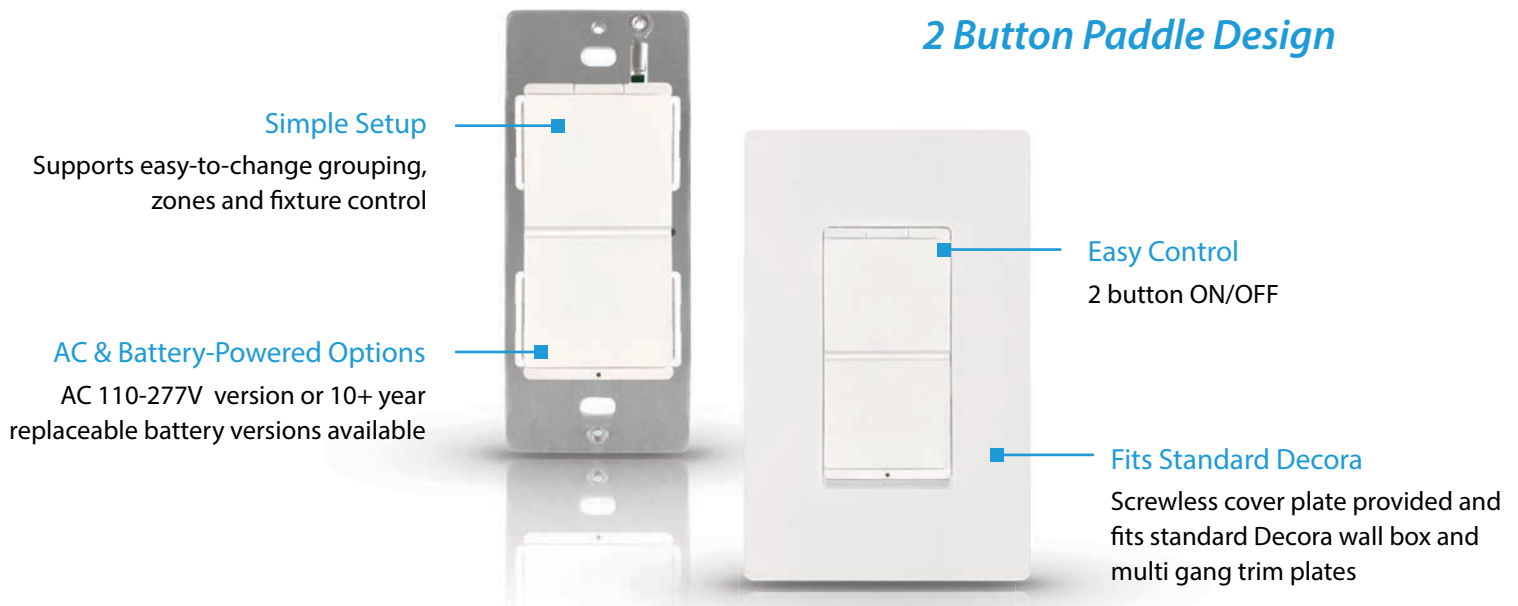

PRODUCT OVERVIEW

For some applications needing only on/off capability, or where there is a need to match conventional two button paddle décor designs, the Avi-on 2 button wall station is the perfect answer. Available with either on/off or on/off with raise/lower dimming options configurable from the Avi-on app. AC, LV and battery-powered options make it easy to install in nearly any application. The two button cover is even retrofittable to existing switches with an easy firmware update.

Features

- Battery powered with 10+ year battery life
- On/Off buttons
- Software configurable on/off single press, or quick press on/off with hold to dim up/dim down
- Battery device that is not continuously powered
- Fits standard Decora wall box and multi gang trim plates (only fits square mud rings not rounded or beveled)
- Screwless cover plate also provided

Common Specifications

- Indoor use only (spray resistant cover plate available for food service applications)
- Operating Temp: -4 to 122 °F (-20 to 50 °C)
- 10+Year battery life with Replaceable Batteries
- UL Listed

ORDERING INFORMATION

Part Number	Name	Description
AVI-B-2402BAT-3	2 Button Wall Station (Battery)	2 button wall control on/off or on/off with hold to dim up/down. Battery Powered.

To order please contact Avi-on sales at **(877) AVION-US**, (877) 284-6687 or prosales@avi-on.com for information on becoming an Avi-on partner and order details.

Project		Location/Type	
---------	--	---------------	--

SPECIFICATIONS

Battery Version

Battery	Description
Estimated Battery Life	10 year
Battery Type	CR123A*2 (Lithium)
DC 3V 5mA	

Specifications	Min	Max	Unit
Operating Temperature	-4 (-20)	122 (50)	°F (°C)
Storage Temperature	-40 (-40)	185 (85)	°F (°C)

Case Dimensions (Excluding Wires)

Part	Length	Width	Height
2 Button Wall Station	4.69" (119mm)	2.95" (75mm)	1.57" (40mm)

Materials

Non Ferrous materials (plastic and aluminum)

All materials ROHS compliant

Certifications

Regulatory	Description
USA	FCC ID: 2AFZI-AVIBG21 FCC Part 15, Subpart B (Class B) FCC Part 15.247
Canada	IC ID: 20544-AVIBG21 ICES-003, Issue 7, Oct. 2020 RSS-GEN Issue 5, Feb. 2021 Amendment 2 RSS-247 Issue 2, Feb. 2017
BQB	DID: D063032 Qualified Design ID (QDID): 205509 178212 175341
UL	UL File E519564 UL 60730-1 ED. 5 XACN/XACN7 Touch Lighting Controls

Technical drawing of the HP Z2 Mini G1 showing front, top, and side views with dimensions:

- Front View:**
 - Width: 2.95" (75mm)
 - Height: 4.69" (119 mm)
- Top View:**
 - Width: 1.57" (40mm)
- Side View:**
 - Height: 2.76" (70mm)
 - Depth: 1.30" (33mm)

The image displays the back of an Avion Wireless Wall Station (Battery) in two configurations. The left configuration shows the top half of the device, which includes the Avion logo, a Bluetooth symbol, and regulatory information such as the FCC ID (2AFC4-A070100) and CE mark. It also features a QR code and a warning label about battery replacement. The right configuration shows the bottom half of the device, which contains two ENE batteries installed in the battery compartment. The batteries are labeled 'ENE' and 'ALKALINE BATTERY'. The device is white with a grey top section and a grey bottom section.

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE. The information contained herein is believed to be reliable. Avi-on makes no warranty, representation or guarantee regarding the information contained herein, the suitability of the products for any particular purpose, or the continuing production of any product. Avi-on assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein, or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information.

