

RS-232 Serial Interface

RS-232 Serial Interface

Standard ASCII Based Commands,
compatible with most touch screen
serial drivers



Two Way Serial Communication for Touch Screens and other Serial Devices

PRODUCT OVERVIEW

The Avi-on RS-232 Serial Interface provides a reliable, two-way serial **connection to touch-screen control units** or any device that needs to send or receive commands to/from the Avi-on Network using the Avi-on Serial ASCII Protocol.

The Avi-on Serial Protocol supports a wide range of external interface control actions, including:

Send to the Avi-on Network:

Device/Group ON/OFF/Dim Level commands, Scene Triggers, Dimming Overrides, Avi-on Lockdown Mode triggers, and UL 924 Mode triggers.

Receive from the Avi-on Network:

Device/Group dimming status updates, sensor trigger information, and Lockdown Mode enable/disable notifications.

Design custom touch-screen interfaces with ease by sending the appropriate serial commands from your preferred touch-screen or building control system.

The complete command set, along with sample integrations for common control systems—including Crestron and RTI—is provided in the installation guide.

ORDERING INFORMATION

Part Number	Description	Antenna	Input Voltage
AVI-B-LV232-12-24VDC	RS-232 Serial Interface	Internal	12 - 24 VDC

To order please contact Avi-on sales at **(877) AVION-US**, (877) 284-6687 or prosales@avi-on.com for information on becoming an Avi-on partner and order details.

Project		Location/ Type	
---------	--	-------------------	--

DEVICE SPECIFICATIONS


Input Voltage:	12-24VDC	Storage Temperature:	-40F to +185F (-40C to +85C)
Power Consumption:	17mA	Humidity Rating:	95% non-condensing
CC Input:	12-24VDC Non powered contact closure detection (momentary)	Radio Frequency:	2.4GHz
Direct Connect Input:	Compatible with all Avi-on Direct Connect™ Motion/Daylight sensors	Wireless Standard:	BLE 5.3 with Mesh
Size:	2.30in x 1.43in x 0.75in (58.2mm x 36.4mm x 19mm)	Point to Point Range*:	80ft with obstructions and 350ft unobstructed
Mounting:	Removable mounting tabs	Security:	AES 128-bit encryption for device to device communication AES 256-bit encryption for device to cloud communication
Weight:	0.45 oz (16g)	Warranty:	5 years; 10 years optional
Terminal Blocks:	22-16 AWG wires		
Operating Temperature:	-22F to +158F (-30C to +70C)		

*When communicating through the mesh, range is essentially unlimited (5000ft+)


REGULATORY

CE:	EN IEC 6100-6-1:2019 EN IEC 6100-6-3:2021 ETSI EN 301 489-1 V2.2.3 (2019-11) ETSI EN 301 489-17 V3.2.5 (2022-08) BS EN IEC 61058-1:2018 / EN, IEC 61058-1:2018 BS EN 61058-1-2:2016 / EN 61058-1-2:2016 EN 62479:2010 EN 50663:2017 ETSI EN 300 328 v2.2.2 (2019-07)	IC:	IC ID: 20544-AVIBG21, ICES-003, Issue 7, Oct. 2020, RSS-GEN Issue 5, Feb. 2021 Amendment 2, RSS-247 Issue 2, Feb. 2017
FCC:	FCC ID: 2AFZI-AVIBG21, FCC Part 15, Subpart B (Class B), FCC Part 15.247	BQB: DID:	D063032
		Qualified Design ID (QDID):	205509 178212 175341

DIMENSIONS

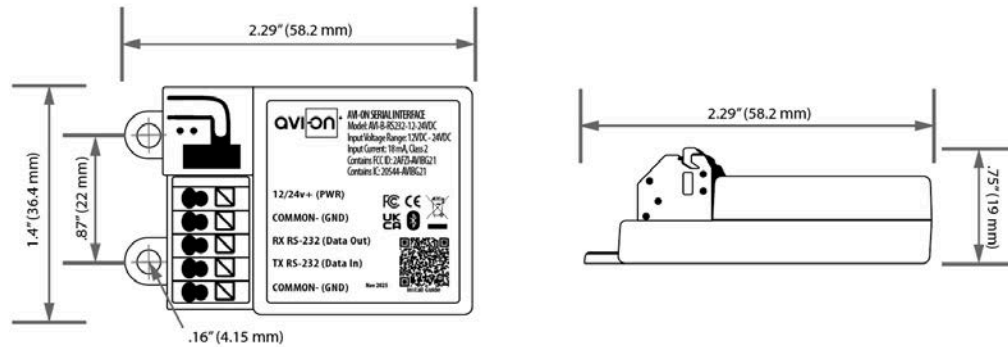

WIRING DIAGRAMS

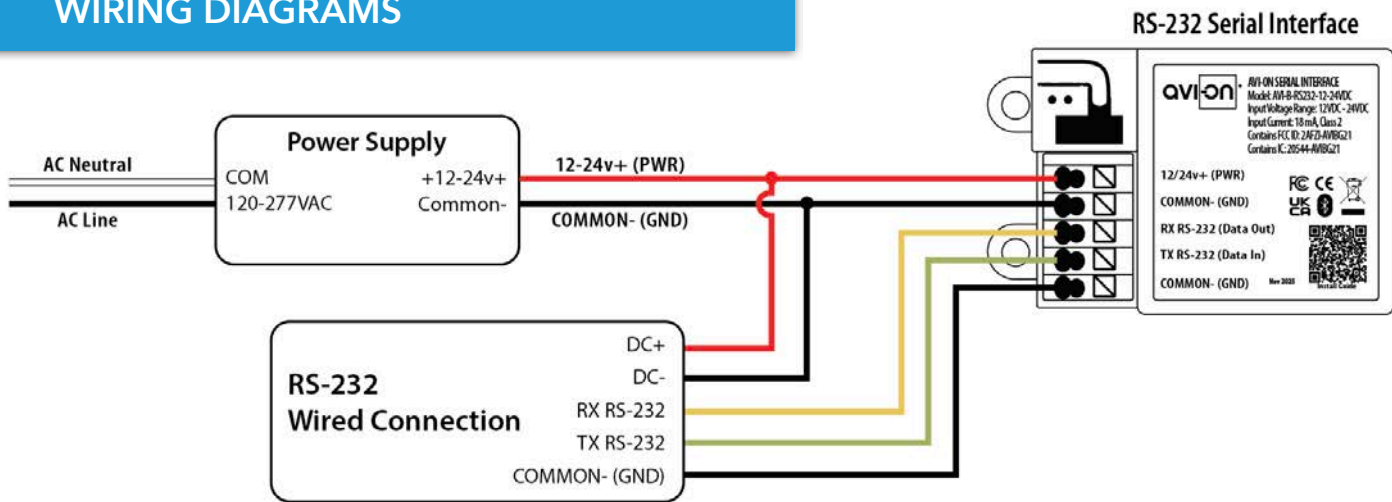

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE. The information contained herein is believed to be reliable. Avi-on makes no warranty, representation or guarantee regarding the information contained herein, the suitability of the products for any particular purpose, or the continuing production of any product. Avi-on assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein, or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information.

