


Wall Station Circuit Dimmer

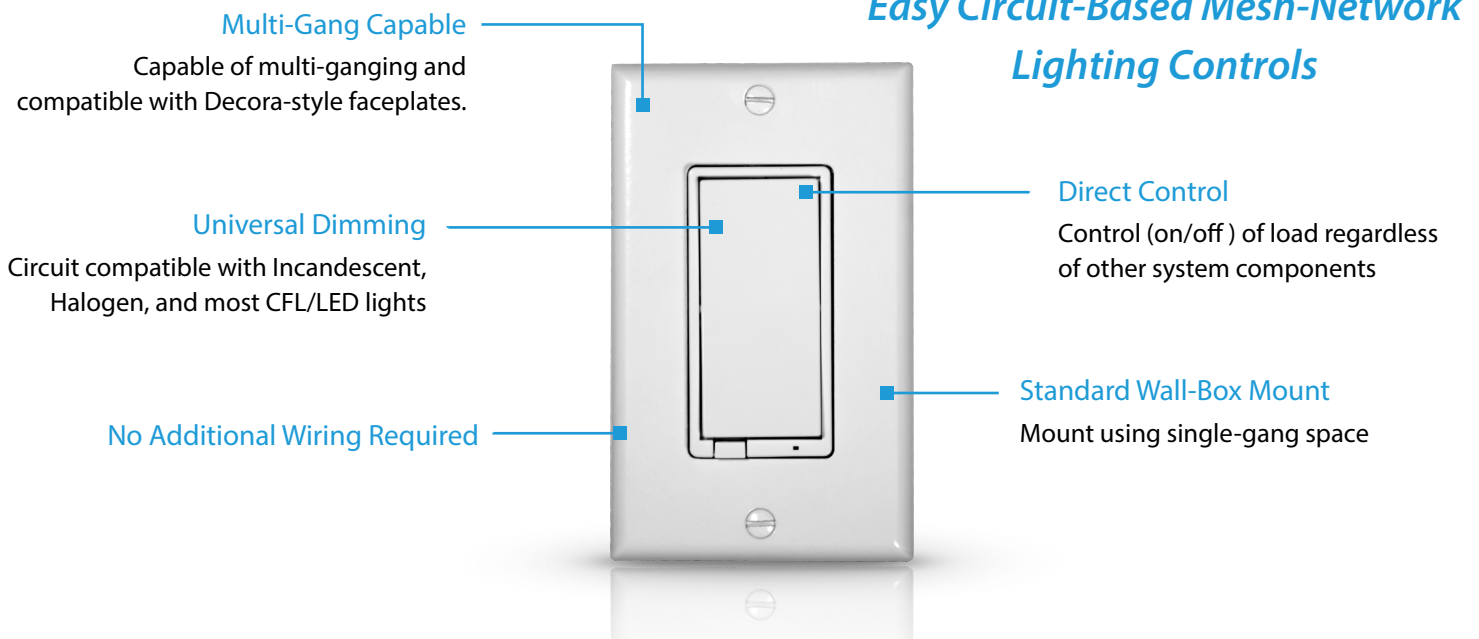

SPECIFICATIONS

Avi-on Dimmers enable physical and Bluetooth® wireless lighting controls for on/off and dimming functions. Solutions are available for both new construction and retrofit needs. All controls interface with lighting fixtures and the Avi-on App, providing a platform that supports easy-to-change grouping, scheduling, timers, and scenes.

Benefits

- Enable networked lighting control of switch legs utilizing existing wiring and no changes to fixtures
- Available Dimming can save energy and extend lamp life while allowing optimum light levels for task
- Automated control of lighting and plug loads based on schedule, occupancy sensor, additional wall station controllers, or via Application or API integration (ex. Alexa or Google Assistant)

Features

- Universal Dimming circuit compatible with Incandescent, Halogen, and most CFL/LED lights
- Direct control (on/off) of load regardless of other system components
- No additional wiring required
- High and low end trim
- Capable of multi-ganging, and compatible with Decora-style faceplates
- Standard wall-box mount, using single-gang space
- XYZ Color Options

ORDERING INFORMATION

Part Number	Name	Description
AVI13870	In-wall Dimmer	Decora-style dimmer/switch with LED status indicator. AC-powered. Maximum Loads: Incandescent: 600W, 2-way: 500W, 3-way: 400W, CFL/LED: 150W, 2-way: 125W, 3-way: 100W

To order please contact Avi-on sales at **(877) AVION-US**, (877) 284-6687 or prosales@avi-on.com for information on becoming an Avi-on partner and order details.

Project		Location/ Type	
---------	--	-------------------	--

Options

- Direct AC circuit switching and dimming
- Ability to add wireless switching and dimming
- Ability to add additional control points without direct wiring
- Pre-set scene selection

Specifications

- Indoor use only
- 120VAC, 60Hz
- Operating Temp: 32 to 104 °F (0 to 40 °C)
- Grouping and Favoriting with the Avi-on App

DIMENSIONS & CERTIFICATIONS

Case Dimensions

Part	Length	Width	Height
In-wall Dimmer	4.13" (105mm)	2.14" (54mm)	1.81" (46mm)

Materials

Non Ferrous materials (plastic and aluminum)
All materials ROHS compliant

Certifications

Regulatory	Description
USA	FCC: U2ZBT3101, U2ZBT4101, U2ZBT3001, U2ZBT4001
Canada	IC: 6924A-BT3101, 6924A-BT4101, 6924A-BT3001, 6924A-BT4001
UL	3MWZ

Dimensions

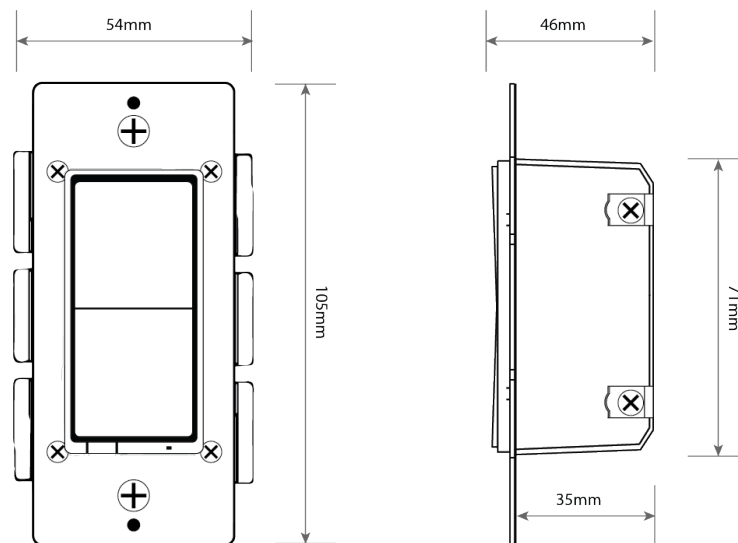


Figure 1. In-Wall Dimmer Dimensions

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE. The information contained herein is believed to be reliable. Avi-on makes no warranty, representation or guarantee regarding the information contained herein, the suitability of the products for any particular purpose, or the continuing production of any product. Avi-on assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein, or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information.

