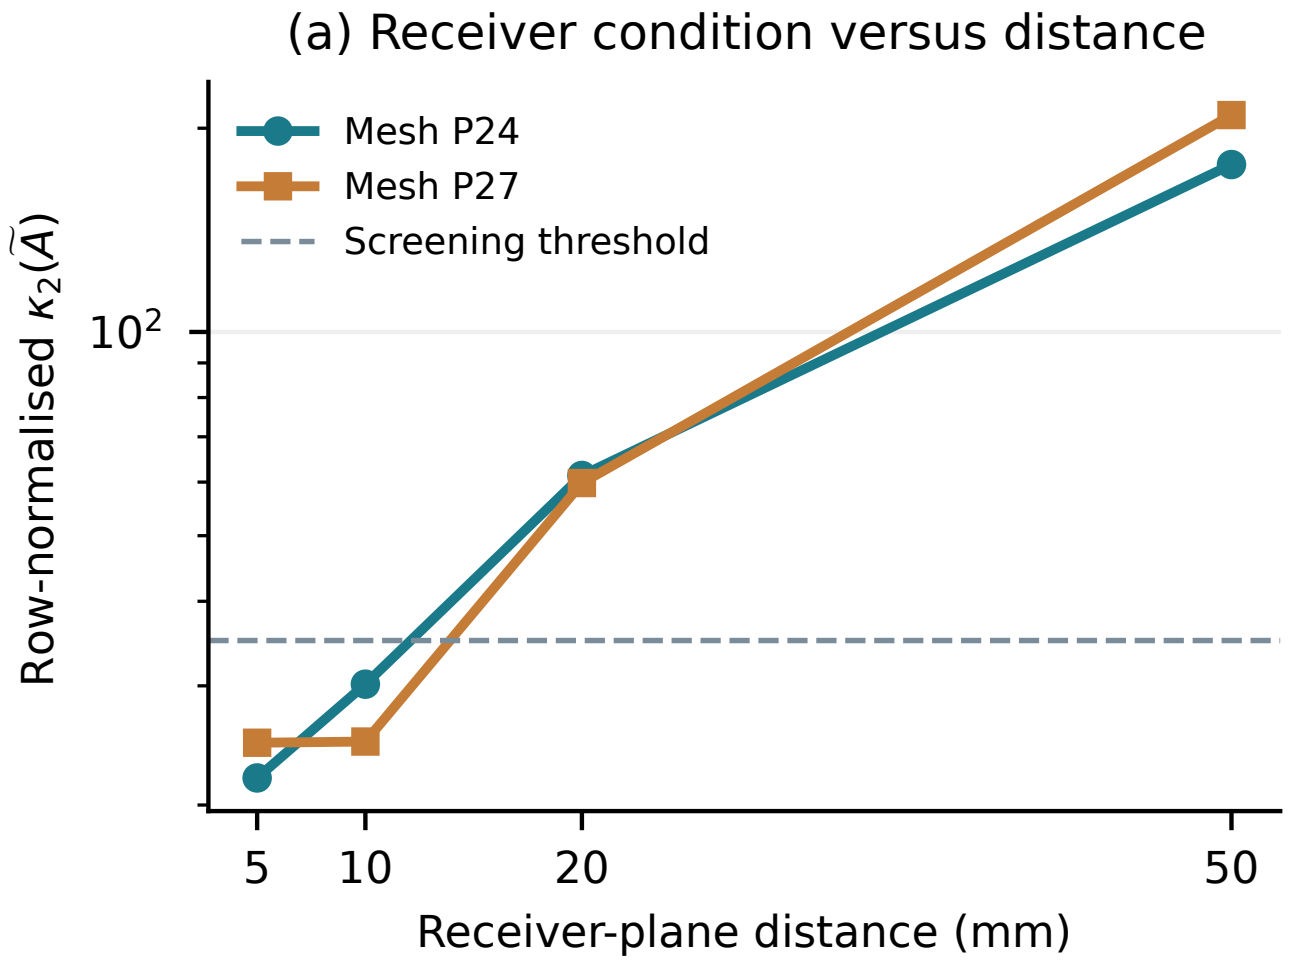
(a) Receiver condition versus distance
Mesh P24
Mesh P27
Screening threshold
Row-normalised $\kappa_2(\tilde{A})$
10^2
5
10
20
50
Receiver-plane distance (mm)

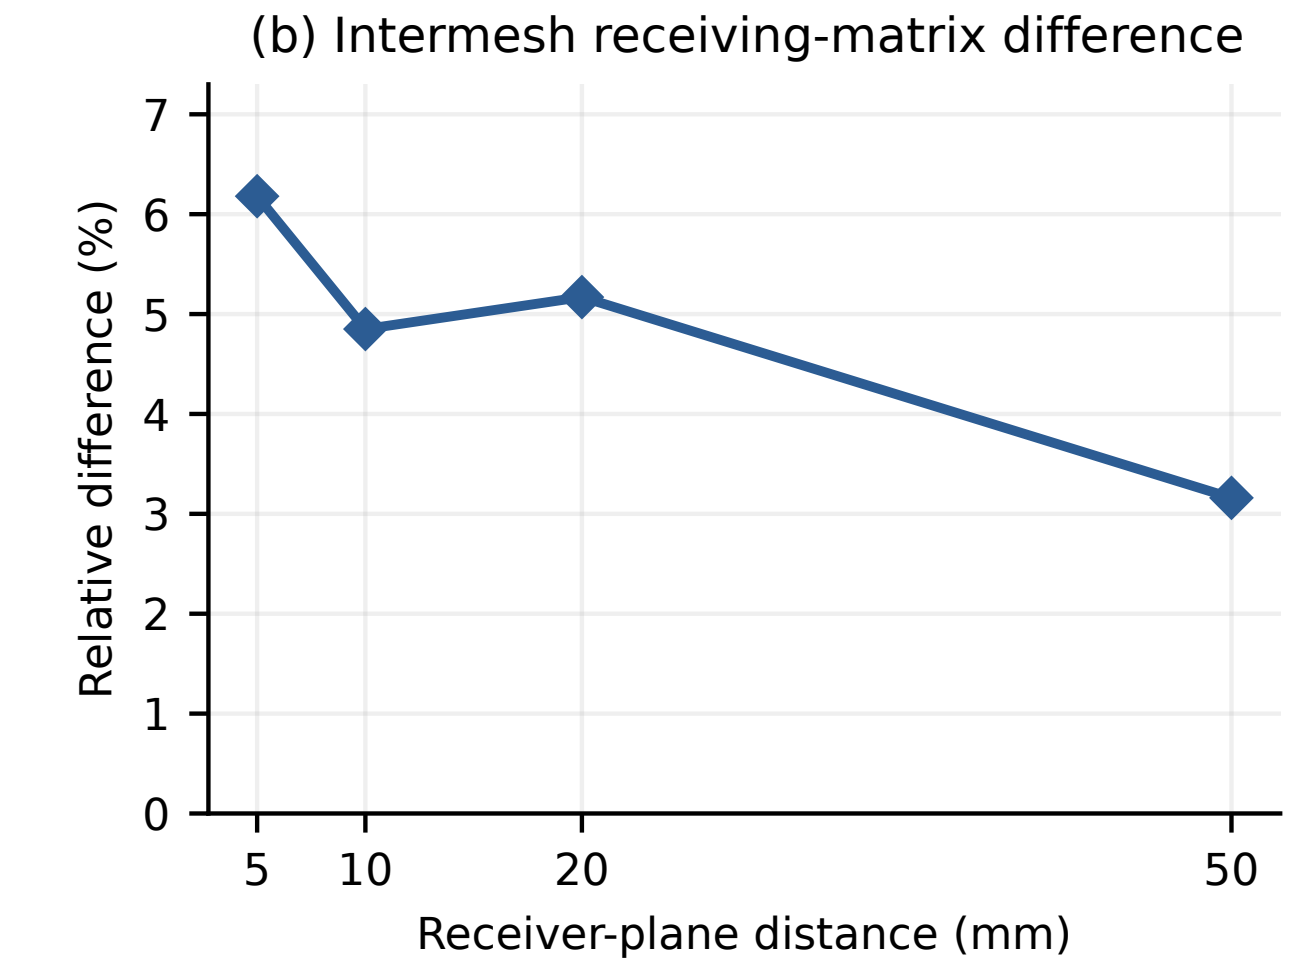
(b) Intermesh receiving-matrix difference
Relative difference (%)
0
1
2
3
4
5
6
7
5
10
20
50
Receiver-plane distance (mm)