



MASTERColour CDM-TC Elite

MASTERColour CDM-TC Elite 35W/930 G8.5 1CT/12

Single-ended, compact size, high-efficiency Ceramic Metal Halide discharge lamp

Product data

General Information		Colour Rendering Index,horiz (Min)	
Cap base	G8.5 [G8.5]	Colour Rendering Index,horiz (Nom)	87
Burning Position	UNIVERSAL [Any/Universal]		90
Life to 5% failures (nom.)	12000 h	Operating and Electrical	
Life to 10% failures (nom.)	14000 h	Power (Rated) (Nom)	39.1 W
Life to 20% failures (nom.)	16000 h	Lamp current run-up (max.)	1 A
Life to 50% failures (nom.)	20000 h	Ignition supply voltage (max.)	198 V
ANSI code HID	C130/E	Ignition peak voltage (max.)	5000 V
Light Technical		Ignition supply voltage (min.)	198 V
Colour Code	930 [CCT of 3,000 K]	Re-ignition time (min.) (max.)	15 min
Lamp Luminous Flux (Min)	3600 lm	Ignition time (max.)	30 s
Lamp Luminous Flux (Nom)	4000 lm	Voltage (Max)	90 V
Colour Designation	Warm white (WW)	Voltage (Min)	80 V
Lumen maintenance 12,000 hours (nom.)	78 %	Voltage (Nom)	85 V
Lumen maintenance 10,000 hours (nom.)	80 %	Controls and Dimming	
Lumen maintenance 2,000 hours (nom.)	93 %	Dimmable	no
Lumen maintenance 5,000 hours (nom.)	88 %	Run-up time 90% (max.)	3 min
Chromaticity coordinate X (nom.)	0.435	Run-up time 90% (nom.)	1.5 min
Chromaticity coordinate Y (nom.)	0.396		
Colour Temperature, horizontal (Nom)	3000 K		
Lamp Luminous Efficacy EM (Nom)	102 lm/W		

MASTERColour CDM-TC Elite

Mechanical and Housing	
Bulb finish	Clear
Approval and Application	
Energy efficiency label (EEL)	A+
Mercury (Hg) content (nom.)	4.7 mg
Energy Consumption kWh/1000 h	43 kWh
UV	
PET (NIOSH) (min.)	8 h/500lx
Damage factor D/fc (max.)	0.3
Luminaire Design Requirements	
Bulb temperature (max.)	500 °C
Pinch temperature (max.)	300 °C

Dimensional drawing


. D .

Product Data	
Full product code	872790091149700
Order product name	MASTERColour CDM-TC Elite 35W/930 G8.5 1CT/12
EAN/UPC – product	8727900911497
Order code	928189105131
Local Code	CDMTCEL35W930
Numerator – quantity per pack	1
Numerator – packs per outer box	12
Material no. (12NC)	928189105131
Net weight (piece)	0.009 kg
ILCOS Code	MT/UB-35/930-H-G8.5-17/85


Product	D (max)	O	L (min)	L (max)	L	C (max)
MASTERColour CDM-TC Elite 35W/930 G8.5 1CT/12	15 mm	4.8 mm	51 mm	53 mm	52 mm	85 mm

CDM-TC Elite 35W/930 G8.5

Photometric data

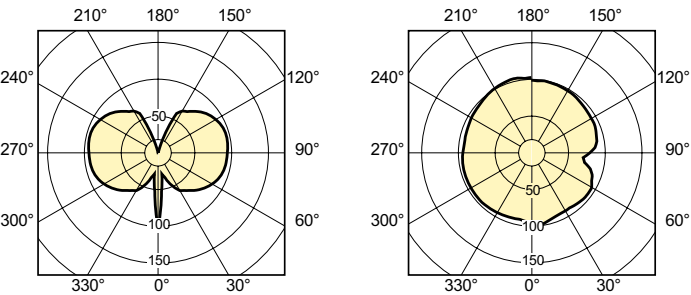


LDLD_CDMTC-E_0001-Light distribution diagram

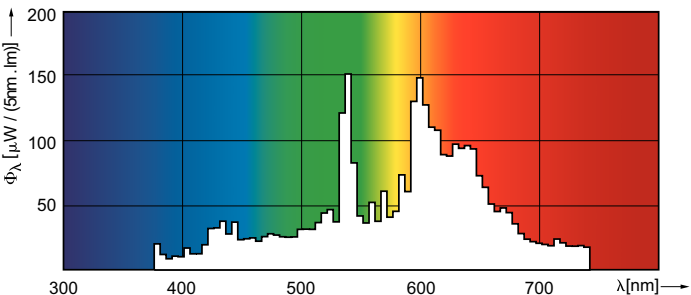


LDPO_CDMTC-E_0001-Spectral power distribution Colour

MASTERC colour CDM-TC Elite

Lifetime

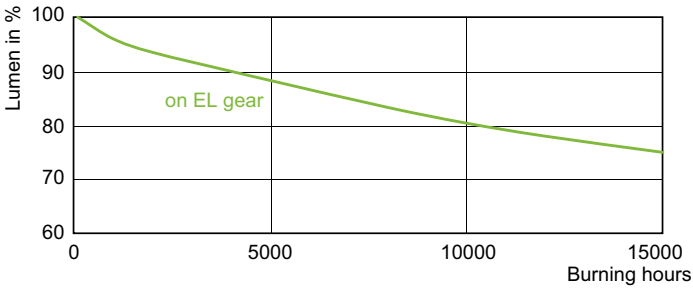

LDLM_CDMTC-E_0001-Lumen maintenance diagram

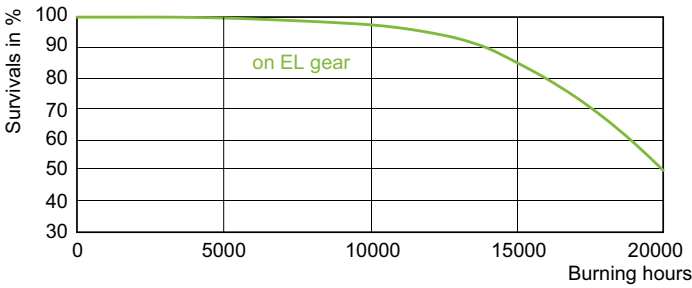

LDLE_CDMTC-E_0002-Life expectancy diagram

