

RXF[®]

专业功放、调音台

Professional Power Amplifier

Professional Mixer



恩平市锐星电子科技有限公司

ENPING RUIXING ELECTRONICS TECHNOLOGY CO. LTD



性能特点:

- BHK系列是对传统H类功放线路升级改良的成果。
- 具备传统功放的优势，采用双环形变压器设计，每个变压器分别独立支持一个通道，使功放更稳定地工作。
- 采用东芝2S功放管，跟线路设计完美匹配，输出更优质声音的同时，使转换效率更高。
- 专有科技空间感的外观设计，为消费者提供更愉悦的使用体验。




Feature:

- The BHK series is the result of upgrading the traditional Class H power amplifier.
- With the advantages of traditional power amplifier, it adopts double toroidal transformer design, each transformer independently supports one channel, which makes the power amplifier work more stably.
- With the TOSHIBA 2S transistor, it perfectly matches the circuits design, provides higher quality sound while deliver stronger power.
- The futuristic design provides a more enjoyable experience for consumers.

技术参数 / Specification

型号 Model	BHK-250	BHK-350	BHK-500	BHK-650	BHK-800	BHK-1100	BHK-1300	BHK-1500	BHK-1800	BHK-2000
立体声输出功率 8Ω Stereo Power	2x250W	2x350W	2x500W	2x650W	2x800W	2x1100W	2x1300W	2x1500W	2x1800W	2x2000W
立体声输出功率 4Ω Stereo Power	2x400W	2x550W	2x800W	2x1000W	2x1300W	2x1700W	2x2000W	2x2300W	2x2800W	2x3000W
立体声输出功率 2Ω Stereo Power	2x650W	2x900W	2x1300W	2x1400W	2x1800W	2x2300W	2x2700W	2x3100W	2x3800W	2x4000W
桥接单声道输出 8 BTL	800W	1100W	1600W	2000W	2500W	3500W	4100W	4700W	5500W	6300W
桥接单声道输出 4 BLT	1100W	1500W	2100W	2800W	3400W	4700W	5500W	6400W	7400W	8500W
频率响应 Frequency Response	20-20000Hz(±0.3dB)									
总谐波失真 THD+N	>0.08%1KHz									
信噪比 S/N Ratio	>100dB									
瞬态响应 Slew Ratio	>30V/uS									
阻尼系数 Damping Factor	>500:1									
串音 Crosstalk	>90dB@1KHz									
输入阻抗 Input Impedance	30KΩ(Balanced,Stereo) 15KΩ(Blanced,Paralled)									
输入灵敏度 Input Sensitivity	0.775V/1.0V/1.4V									
高度 Height										
尺寸 Packing Dimension	2U 510x483x90mm				3U 560x483x133mm			3U 655x483x133mm		

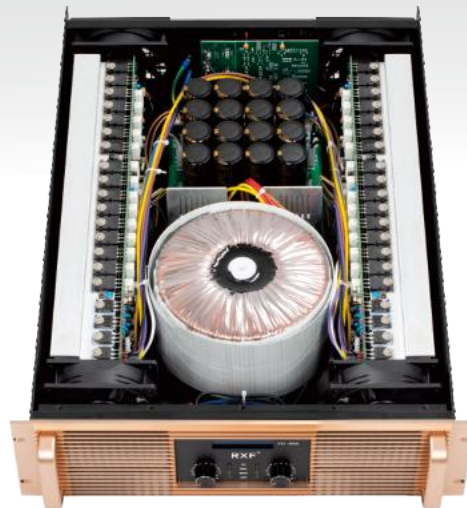

性能特点:

- 采用东芝2S晶体管，高频电容，纯铜变压器。显示模块内置稳定传感器，保证输入电压波动时显示正常工作。
- 经过电路的改进，可以在发电机供电的情况下稳定工作，长时间恶劣环境下，依然保存出色的工作。



Feature:

- Adopts Toshiba 2S transistor and high frequency capacitor, with pure copper transformer. Stabilizing sensor is built in the display module, to ensure that the display work normally even though the input voltage is fluctuating.
- After improved the circuitry, the amplifier be able to work steadily and excellently under harsh situation, such as be powered by generator, long term working...etc

技术参数 / Specification

型号 Model	YD-770	YD-880	YD-990
立体声输出功率 8Ω Stereo Power	2x1500W	2x1800W	2x2000W
立体声输出功率 4Ω Stereo Power	2x2300W	2x2800W	2x3000W
立体声输出功率 2Ω Stereo Power	2x3100W	2x3800W	2x4000W
桥接单声道输出 8 BTL	4700W	5500W	6300W
桥接单声道输出 4 BLT	6400W	7400W	8500W
频率响应 Frequency Response	20-20000Hz(±0.3dB)		
总谐波失真 THD+N	>0.08%KHz		
信噪比 S/N Ratio	>100dB		
瞬态响应 Slew Ratio	>30V/uS		
阻尼系数 Damping Factor	>500:1		
串音 Crosstalk	>90dB@KHz		
输入阻抗 Input Impedance	30Kfi(Balanced,Stereo) 15KO(Blanced,Paralled)		
输入灵敏度 Input Sensitivity	0.775V/1.0V/1.4V		
高度 Height	3U		
尺寸 Packing Dimension	655x483x133mm		



性能特点:

- 采用A级硅钢片大功率环形变压器，令音质更加细腻、强劲厚实。而元器件在实践中不断改良，精选匹配、制作精细。
- 全部引入AI自动化机械插件和SMD贴片制作工艺。大大提高了产品的焊接可靠性和一致性。
- 提供高质量的声音和高阻尼系数，高效自动变速散热系统，保证功放长时间稳定工作。
- 此线路在时间的推动下不断完善成熟，同时也在不断完成新的突破，使它更力完美。



Feature:

- Adopts A grade toroidal transformer, very close to no EMI, and deliver more delicate sound. Components are carefully selected to match the circuits design.
- All adopts AI automated mechanical plug-in and SMD production process. Improve the reliability and consistency of the product welding.
- Deliver high-quality sound and high damping factor, with ultra fast switching diode fan, to ensure a stable working state for a long time performance.
- This circuits design have been improved during the practical experience. And it will be continuously updated in the future as well.

技术参数 / Specification

型号 Model	CP-1500	CP-1800	CP-2000
立体声输出功率 8Ω Stereo Power	2x1500W	2x1800W	2x2000W
立体声输出功率 4Ω Stereo Power	2x2300W	2x2800W	2x3000W
立体声输出功率 2Ω Stereo Power	2x3100W	2x3800W	2x4000W
桥接单声道输出 8 BTL	4700W	5500W	6300W
桥接单声道输出 4 BLT	6400W	7400W	8500W
频率响应 Frequency Response	20-20000Hz(±0.3dB)		
总谐波失真 THD+N	>0.08%KHz		
信噪比 S/N Ratio	>100dB		
瞬态响应 Slew Ratio	>30V/uS		
阻尼系数 Damping Factor	>500:1		
串音 Crosstalk	>90dB@KHz		
输入阻抗 Input Impedance	30Kfi(Balanced,Stereo) 15KO(Blanced,Paralled)		
输入灵敏度 Input Sensitivity	0.775V/1.0V/1.4V		
高度 Height	3U		
尺寸 Packing Dimension	655x483x133mm		



性能特点:

- KTB系列在设计上采用了安森美功放管，进一步优化了整个系统，更加精准地满足了各种不同的需求。
- KTB系列产品带有可调的输出电压限制器，使放大器可适用于任何系统。
- 全方位保护系统：带有过流，直流，高频率（VHF），短路，主电源保险丝等保护电路和软启动电路。
- 开关电源线路设计，发热量少，配置4个无极变速控制散热风扇，使功放放在极恶劣的条件下，依然保持出色的工作。

Feature:

- KTB series adopts ON Semiconductor transistor, makes further efforts to optimize the entire system, and meet various needs.
- KTB series come with VPL adjustable output voltage limiter, and this amplifier is applied to any system.
- Full protected system, such as: over current, DC, the very-high frequency (VHF), short-circuits, the main power fuse protection circuitry and soft-star circuit.
- TD circuitry design, produce less heat, built with 4 infinitely variable speeds fan, to ensure the amplifier working perfectly under harsh conditions.

技术参数 / Specification

型号 Model	KTB-1800	KTB-2000	KTB-2200	KTB-2500
立体声输出功率 8Ω Stereo Power	2x1800W	2x2000W	2x2200W	2x2500
立体声输出功率 4Ω Stereo Power	2x2700W	2x3000W	2x3300W	2x3800
立体声输出功率 2Ω Stereo Power	2x3600W	2x4000W	2x4400W	2x5000
桥接单声道输出 8 BTL	4000W	5000W	6000W	6800
桥接单声道输出 4 BLT	6400W	7000W	7600W	8800
频率响应 Frequency Response	20-20000Hz(±0.3dB)			
总谐波失真 THD+N	> 0.08%1KHz			
信噪比 S/N Ratio	> 100dB			
瞬态响应 Slew Ratio	> 30V/uS			
阻尼系数 Damping Factor	> 500:1			
串音 Crosstalk	> 90dB@1KHz			
输入阻抗 Input Impedance	30Kfi(Balanced,Stereo) 15KO(Blanced,Paralled)			
输入灵敏度 Input Sensitivity	0.775V/1.0V/1.4V			
高度 Height	3U			
尺寸 Packing Dimension	595x483x133mm			



性能特点:

- 采用A级硅钢片大功率环形变压器，令音质更加细腻、强劲厚实。而元器件在实践中不断改良，精选匹配、制作精细。
- 全部引入AI自动化机械插件和SMD贴片制作工艺。大大提高了产品的焊接可靠性和一致性。
- 提供高质量的声音和高阻尼系数，高效自动变速散热系统，保证功放长时间稳定工作。
- 此线路在时间的推动下不断完善成熟，同时也在不断完成新的突破，使它更力完美。



Feature:

- Adopts A grade toroidal transformer, very close to no EMI, and deliver more delicate sound. Components are carefully selected to match the circuits design.
- All adopts AI automated mechanical plug-in and SMD production process. Improve the reliability and consistency of the product welding.
- Deliver high-quality sound and high damping factor, with ultra fast switching diode fan, to ensure a stable working state for a long time performance.
- This circuits design have been improved during the practical experience. And it will be continuously updated in the future as well.

技术参数 / Specification

型号 Model	MT-701	MT-1201	MT-1601
立体声输出功率 8Ω Stereo Power	2x800W	2x1000W	2x1200W
立体声输出功率 4Ω Stereo Power	2x1280W	2x1600W	2x1840W
立体声输出功率 2Ω Stereo Power	2x1800W	2x2190W	2x2460W
桥接单声道输出 8 BTL	2480W	3150W	3650W
桥接单声道输出 4 BLT	3550W	4250W	4800W
频率响应 Frequency Response	20-20000Hz(±0.3dB)		
总谐波失真 THD+N	>0.08%1KHz		
信噪比 S/N Ratio	>100dB		
瞬态响应 Slew Ratio	>30V/uS		
阻尼系数 Damping Factor	>500:1		
串音 Crosstalk	>90dB@1KHz		
输入阻抗 Input Impedance	30Kfi(Balanced,Stereo) 15KO(Blanced,Paralled)		
输入灵敏度 Input Sensitivity	0.775V/1.0V/1.4V		
高度 Height	3U		
尺寸 Packing Dimension	615x485x136mm		



性能特点:

- 采用A级硅钢片大功率环形变压器，令音质更加细腻、强劲厚实。而元器件在实践中不断改良，精选匹配、制作精细。
- 全部引入AI自动化机械插件和SMD贴片制作工艺。大大提高了产品的焊接可靠性和一致性。
- 提供高质量的声音和高阻尼系数，高效自动变速散热系统，保证功放长时间稳定工作。
- 此线路在时间的推动下不断完善成熟，同时也在不断完善新的突破，使它更玲珑美。



Feature:

- Adopts A grade toroidal transformer, very close to no EMI, and deliver more delicate sound. Components are carefully selected to match the circuits design.
- All adopts AI automated mechanical plug-in and SMD production process. Improve the reliability and consistency of the product welding.
- Deliver high-quality sound and high damping factor, with ultra fast switching diode fan, to ensure a stable working state for a long time performance.
- This circuits design have been improved during the practical experience. And it will be continuously updated in the future as well.

技术参数 / Specification

型号 Model	D2	D3	D5	D6	D8	D11	D13	D15	D18	D20
立体声输出功率 8Ω Stereo Power	2x250W	2x350W	2x500W	2x650W	2x800W	2x1100W	2x1300W	2x1500W	2x1800W	2x2000W
立体声输出功率 4Ω Stereo Power	2x400W	2x550W	2x800W	2x1000W	2x1300W	2x1700W	2x2000W	2x2300W	2x2800W	2x3000W
立体声输出功率 2Ω Stereo Power	2x650W	2x900W	2x1300W	2x1400W	2x1800W	2x2300W	2x2700W	2x3100W	2x3800W	2x4000W
桥接单声道输出 8 BTL	800W	1100W	1600W	2000W	2500W	3500W	4100W	4700W	5500W	6300W
桥接单声道输出 4 BLT	1100W	1500W	2100W	2800W	3400W	4700W	5500W	6400W	7400W	8500W
频率响应 Frequency Response	20-20000Hz(±0.3dB)									
总谐波失真 THD+N	>0.08%1KHz									
信噪比 S/N Ratio	>100dB									
瞬态响应 Slew Ratio	>30V/uS									
阻尼系数 Damping Factor	>500:1									
串音 Crosstalk	>90dB@1KHz									
输入阻抗 Input Impedance	30Kfi(Balanced,Stereo) 15KO(Blanced,Paralled)									
输入灵敏度 Input Sensitivity	0.775V/1.0V/1.4V									
高度 Height	2U				3U			3U		
尺寸 Packing Dimension	510x483x90mm				560x483x133mm			655x483x133mm		



性能特点:

- DJ系列运用了世界先进的线性H类电樹技术核心。
- 采用音频专用超大环型变压器和超大容量的滤波电容，给功放提供超过额定功率两倍的功率储备 和极佳的充放电速度，令整机动态响应表现更为出色。
- DJ系列具有性价比高、稳定性强和强劲的输出功率而受到广大用户的青睐。
- 全方位保护电路：带有过流、直流、过热、短路、主电源保险丝等保护电路来保证整机的安全，令 用户使用起来更加安全放心。
- 内置固定可选高/中/低音分频器，完美配合不同的音箱设备。



Feature:

- DJ series adopts the most advanced technical circuits design--class H.
- With cost-effective, highly reliable and strong power is favored by most of the customers.
- With audio-specific ultra-large toroidal transformer and large capacity filter capacitor to provide more than twice rated power reserve and excellent charge and discharge speed,so that the overall dynamic response performance can be even better.
- Fully protection circuit: with over-current, DC, overheating, short circuit, the main power fuse and so on protection circuit to ensure the safety of the whole unit, to enable users using it more safely and securely.
- Built-in fixed optional high/ medium/ bass Crossover, perfect for different speaker equipment.

技术参数 / Specification

型号 Model	DJ-440	DJ-460	DJ-480	DJ-4100	DJ-4120	DJ-4150
立体声输出功率 8Ω Stereo Power	4x400W	4x600W	4x800W	4x1000W	4x1200W	4x1500W
立体声输出功率 4Ω Stereo Power	4x600W	4x900W	4x1200W	4x1500W	4x1800W	4x2300W
立体声输出功率 2Ω Stereo Power	4x800W	4x1200W	4x1600W	4x2000W	4x2400W	4x3000W
桥接单声道输出 8 BTL	900W	1800W	2400W	3000W	3600W	4200W
频率响应 Frequency Response	20-20000Hz(±0.3dB)					
总谐波失真 THD+N	>0.08%KHz					
信噪比 S/N Ratio	>100dB					
瞬态响应 Slew Ratio	>30V/uS					
阻尼系数 Damping Factor	>500:1					
串音 Crosstalk	>90dB@1KHz					
输入阻抗 Input Impedance	30Kfi(Balanced,Stereo) 15KO(Blanced,Paralled)					
输入灵敏度 Input Sensitivity	0.775V/1.0V/1.4V					
高度 Height	2U			3U		
尺寸 Packing Dimension	520x480x90mm			550x483x133mm		



性能特点:

- 采用A级硅钢片大功率环形变压器，令音质更加细腻、强劲厚实。而元器件在实践中不断改良，精选匹配、制作精细。
- 全部引入AI自动化机械插件和SMD贴片制作工艺。大大提高了产品的焊接可靠性和一致性。
- 提供高质量的声音和高阻尼系数，高效自动变速散热系统，保证功放长时间稳定工作。
- 此线路在时间的推动下不断完善成熟，同时也在不断完成新的突破，使它更力完美。



Feature:

- Adopts A grade toroidal transformer, very close to no EMI, and deliver more delicate sound. Components are carefully selected to match the circuits design.
- All adopts AI automated mechanical plug-in and SMD production process. Improve the reliability and consistency of the product welding.
- Deliver high-quality sound and high damping factor, with ultra fast switching diode fan, to ensure a stable working state for a long time performance.
- This circuits design have been improved during the practical experience. And it will be continuously updated in the future as well.

技术参数 / Specification

型号 Model	DJ-220	DJ-230	DJ-250	DJ-260	DJ-280	DJ-2100	DJ-2130	DJ-2150	DJ-2180	DJ-2200
立体声输出功率 8Ω Stereo Power	2x250W	2x350W	2x500W	2x650W	2x800W	2x1100W	2x1300W	2x1500W	2x1800W	2x2000W
立体声输出功率 4Ω Stereo Power	2x400W	2x550W	2x800W	2x1000W	2x1300W	2x1700W	2x2000W	2x2300W	2x2800W	2x3000W
立体声输出功率 2Ω Stereo Power	2x650W	2x900W	2x1300W	2x1400W	2x1800W	2x2300W	2x2700W	2x3100W	2x3800W	2x4000W
桥接单声道输出 8 BTL	800W	1100W	1600W	2000W	2500W	3500W	4100W	4700W	5500W	6300W
桥接单声道输出 4 BLT	1100W	1500W	2100W	2800W	3400W	4700W	5500W	6400W	7400W	8500W
频率响应 Frequency Response	20-20000Hz(±0.3dB)									
总谐波失真 THD+N	>0.08%1KHz									
信噪比 S/N Ratio	>100dB									
瞬态响应 Slew Ratio	>30V/μS									
阻尼系数 Damping Factor	>500:1									
串音 Crosstalk	>90dB@1KHz									
输入阻抗 Input Impedance	30Kfi(Balanced,Stereo) 15KΩ(Balanced,Paralled)									
输入灵敏度 Input Sensitivity	0.775V/1.0V/1.4V									
高度 Height										
尺寸 Packing Dimension	2U 510x483x90mm				3U 560x483x133mm			3U 655x483x133mm		



性能特点:

- 采用A级硅钢片大功率环形变压器，令音质更加细腻、强劲厚实。而元器件在实践中不断改良，精选匹配、制作精细。
- 全部引入AI自动化机械插件和SMD贴片制作工艺。大大提高了产品的焊接可靠性和一致性。
- 提供高质量的声音和高阻尼系数，高效自动变速散热系统，保证功放长时间稳定工作。
- 此线路在时间的推动下不断完善成熟，同时也在不断完成新的突破，使它更力完美。



Feature:

- Adopts A grade toroidal transformer, very close to no EMI, and deliver more delicate sound. Components are carefully selected to match the circuits design.
- All adopts AI automated mechanical plug-in and SMD production process. Improve the reliability and consistency of the product welding.
- Deliver high-quality sound and high damping factor, with ultra fast switching diode fan, to ensure a stable working state for a long time performance.
- This circuits design have been improved during the practical experience. And it will be continuously updated in the future as well.

技术参数 / Specification

型号 Model	VA -2.4	VA -2.6	VA -2.9	VA -2.12	VA -2.18	VA -2.20	VA -2.30	VA -2.50	VA -2.80
立体声输出功率 8Ω Stereo Power	2x350W	2x500W	2x650W	2x800W	2x1100W	2x1300W	2x1500W	2x1800W	2x2000W
立体声输出功率 4Ω Stereo Power	2x550W	2x800W	2x1000W	2x1300W	2x1700W	2x2000W	2x2300W	2x2800W	2x3000W
立体声输出功率 2Ω Stereo Power	2x900W	2x1300W	2x1400W	2x1800W	2x2300W	2x2700W	2x3100W	2x3800W	2x4000W
桥接单声道输出 8 BTL	1100W	1600W	2000W	2500W	3500W	4100W	4700W	5500W	6300W
桥接单声道输出 4 BLT	1500W	2100W	2800W	3400W	4700W	5500W	6400W	7400W	8500W
频率响应 Frequency Response	20-20000Hz(±0.3dB)								
总谐波失真 THD+N	>0.08%1KHz								
信噪比 S/N Ratio	>100dB								
瞬态响应 Slew Ratio	>30V/μS								
阻尼系数 Damping Factor	>500:1								
串音 Crosstalk	>90dB@1KHz								
输入阻抗 Input Impedance	30Kfi(Balanced,Stereo) 15KO(Blanced,Paralled)								
输入灵敏度 Input Sensitivity	0.775V/1.0V/1.4V								
高度 Height									
尺寸 Packing Dimension	2U			3U			3U		
	510x483x90mm			560x483x133mm			655x483x133mm		



性能特点:

- FP系列运用了世界先进的线性H类电树支技术核心。
- 采用音频专用超大环型变压器和超大容量的滤波电容，给功放提供超过额定功率两倍的功率储备和极佳的充放电速度，令整机动态响应表现更为出色。
- FP系列具有性价比高、稳定性强和强劲的输出功率而受到广大用户的青睐。
- 全方位保护电路：带有过流、直流、过热、短路、主电源保险丝等保护电路来保证整机的安全，令用户使用起来更加安全放心。
- 内置固定可选高/中/低音分频器，完美配合不同的音箱设备。



Feature:

- FP series adopts the most advanced technical circuits design--class H.
- With cost-effective, highly reliable and strong power is favored by most of the customers.
- With audio-specific ultra-large toroidal transformer and large capacity filter capacitor to provide more than twice rated power reserve and excellent charge and discharge speed, so that the overall dynamic response performance can be even better.
- Fully protection circuit: with over-current, DC, overheating, short circuit, the main power fuse and so on protection circuit to ensure the safety of the whole unit, to enable users using it more safely and securely.
- Built-in fixed optional high/ medium/ bass Crossover, perfect for different speaker equipment.

技术参数 / Specification

型号 Model	FP2400	FP2600	FP2800	FP4400	FP4600	FP4800
立体声输出功率 8Ω Stereo Power	2x400W	2x600W	2x800W	4x400W	4x600W	4x800W
立体声输出功率 4Ω Stereo Power	2x650W	2x950W	2x1200W	4x600W	4x900W	4x1200W
立体声输出功率 2Ω Stereo Power	2x1000W	2x1600W	2x1600W	4x800W	4x1200W	4x1600W
桥接单声道输出 8 BTL	1200W	1900W	2500W	900W	1800W	2400W
桥接单声道输出 4 BLT	1700W	2500W	3400W	—	—	—
频率响应 Frequency Response	20-20000Hz(±0.3dB)					
总谐波失真 THD+N	>0.08%1KHz					
信噪比 S/N Ratio	>100dB					
瞬态响应 Slew Ratio	>30V/uS					
阻尼系数 Damping Factor	>500:1					
串音 Crosstalk	>90dB@1KHz					
输入阻抗 Input Impedance	30Kf(Balanced,Stereo) 15KO(Balanced,Paralled)					
输入灵敏度 Input Sensitivity	0.775V/1.0V/1.4V					
高度 Height	2U					
尺寸 Packing Dimension	520x483x90mm					



性能特点:

- 采用先进的电路设计，提高了功放的使用效率，降低了整机的工作温度，提高整机长期工作的稳定性。
- 采用大容量滤波电容、高品质音频大功率输出管，大型散热及无极变速控制式散热风扇，保证功率放大器工作在最佳状态。
- 设有压限保护、直流输出保护、输出短路保护、开机冲击电流保护及温度保护等多种完善保护电路确保音响系统更加安全可靠。
- 多种工作电平指示灯，使功放工作状态一目了然。
- 备有XLR卡侖输入插座，方便连接输入信号。
- 使用符合国际安全标准设计的接线柱和音箱螺栓座SPENKON输出插座，确保输出连接牢固可靠。
- 设有单声道/立体声桥接等多种输入模式，满足各种不同的使用需要。



Feature:

- Use of advanced circuit design improves the efficiency amplifier, reducing the machine's operating temperature, long-term work to improve the stability of the whole.
- Large-capacity filter capacitors high-quality audio power output tube, large radiator and cooling fan continuously variable transmission control to ensure that the power amplifier in the best condition.
- Pressure limit protection is provided, DC output protection, output short circuit protection, power-off.
- Anti-shock protection, overcurrent protection and the thermal protection circuits ensure more complete sound system more secure.
- Multiple operating level indicator, so that the amplifier working status.
- With XLR input jack for easy connection to the input signal.
- Use meet international safety standards designed terminals and speaker output jack bolt seat SPENKON, ensure that the output connections are secure and reliable.
- Has bridged mono stereo and other input modes to meet a variety of application needs.

技术参数 / Specification

型号 Model	CA2	CA4	CA6	CA9	CA12	CA18	CA20
立体声输出功率 8Ω Stereo Power	2x250W	2x350W	2x500W	2x650W	2x800W	2x1000W	2x1200W
立体声输出功率 4Ω Stereo Power	2x400W	2x550W	2x750W	2x1000W	2x1200W	2x1500W	2x1800W
立体声输出功率 2Ω Stereo Power	2x550W	2x750W	2x1000W	2x1350W	2x1600W	2x2000W	2x2400W
桥接单声道输出 8 BTL	800W	1100W	1600W	2000W	2500W	3100W	3800W
桥接单声道输出 4 BLT	1100W	1500W	2100W	2800W	3400W	4200W	5000W
频率响应 Frequency Response	20-20000Hz(±0.3dB)						
总谐波失真 THD+N	>0.08%1KHz						
信噪比 S/N Ratio	>100dB						
瞬态响应 Slew Ratio	>30V/uS						
阻尼系数 Damping Factor	>300:1						
串音 Crosstalk	>90dB@1KHz						
输入阻抗 Input Impedance	30KΩ(Balanced,Stereo) 15KΩ(Balanced,Paralled)						
输入灵敏度 Input Sensitivity	0.775V/1.0V/1.4V						
高度 Height	2U			3U			
尺寸 Packing Dimension	465x483x90mm			515x483x133mm			



性能特点:

- 采用先进的电路设计，提高了功放的使用效率，降低了整机的工作温度，提高整机长期工作的稳定性。
- 采用大容量滤波电容、高品质音频大功率输出管，大型散热及无极变速控制式散热风扇，保证功率放大器工作在最佳状态。
- 设有压限保护、直流输出保护、输出短路保护、开机冲击电流保护及温度保护等多种完善保护电路确保音响系统更加安全可靠。
- 多种工作电平指示灯，使功放工作状态一目了然。
- 备有XLR卡侬输入插座，方便连接输入信号。
- 使用符合国际安全标准设计的接线柱和音箱螺栓座SPENKON输出插座，确保输出连接牢固可靠。
- 设有单声道/立体声桥接等多种输入模式，满足各种不同的使用需要。



Feature:

- Use of advanced circuit design improves the efficiency amplifier, reducing the machine's operating temperature, long-term work to improve the stability of the whole.
- Large-capacity filter capacitors high-quality audio power output tube, large radiator and cooling fan continuously variable transmission control to ensure that the power amplifier in the best condition.
- Pressure limit protection is provided, DC output protection, output short circuit protection, power-off.
- Anti-shock protection, overcurrent protection and the thermal protection circuits ensure more complete sound system more secure.
- Multiple operating level indicator, so that the amplifier working status.
- With XLR input jack for easy connection to the input signal.
- Use meet international safety standards designed terminals and speaker output jack bolt seat SPENKON, ensure that the output connections are secure and reliable.
- Has bridged mono stereo and other input modes to meet a variety of application needs.

技术参数 / Specification

型号 Model	CA+2	CA+4	CA+6	CA+9	CA+12	CA+12	CA+18	CA+20	CA+28	CA+30
立体声输出功率 8Ω Stereo Power	2x250W	2x350W	2x500W	2x650W	2x800W	2x900W	2x1100W	2x1300W	2x1400W	2x1500W
立体声输出功率 4Ω Stereo Power	2x400W	2x550W	2x800W	2x1000W	2x1300W	2x1500W	2x1800W	2x2100W	2x2200W	2x2400W
立体声输出功率 2Ω Stereo Power	2x650W	2x900W	2x1300W	2x1600W	2x2100W	2x2400W	2x2800W	2x3300W	2x3600W	2x3800W
桥接单声道输出 8 BTL	800W	1100W	1600W	2000W	2500W	2800W	3500W	4100W	4400W	4700W
桥接单声道输出 4 BLT	1100W	1500W	2100W	2800W	3400W	3800W	4700W	5500W	6000W	6400W
频率响应 Frequency Response	20-20000Hz(±0.3dB)									
总谐波失真 THD+N	>0.08%1KHz									
信噪比 S/N Ratio	>100dB									
瞬态响应 Slew Ratio	>30V/uS									
阻尼系数 Damping Factor	>300:1									
串音 Crosstalk	>90dB@1KHz									
输入阻抗 Input Impedance	30Kfi(Balanced,Stereo) 15KO(Blanced,Paralled)									
输入灵敏度 Input Sensitivity	0.775V/1.0V/1.4V									
高度 Height	2U					3U				
尺寸 Packing Dimension	465x483x90mm					515x483x133mm				



性能特点:

- 采用A级硅钢片大功率环形变压器，令音质更加细腻、强劲厚实。而元器件在实践中不断改良，精选匹配、制作精细。
- 全部引入AI自动化机械插件和SMD贴片制作工艺。大大提高了产品的焊接可靠性和一致性。
- 提供高质量的声音和高阻尼系数，高效自动变速散热系统，保证功放长时间稳定工作。
- 此线路在时间的推动下不断完善成熟，同时也在不断完成新的突破，使它更力完美。



Feature:

- Adopts A grade toroidal transformer, very close to no EMI, and deliver more delicate sound. Components are carefully selected to match the circuits design.
- All adopts AI automated mechanical plug-in and SMD production process. Improve the reliability and consistency of the product welding.
- Deliver high-quality sound and high damping factor, with ultra fast switching diode fan, to ensure a stable working state for a long time performance.
- This circuits design have been improved during the practical experience. And it will be continuously updated in the future as well.

技术参数 / Specification

型号 Model	CA2	CA4	CA6	CA9	CA12	CA18	CA20	CA30	CA50	CA80
立体声输出功率 8Ω Stereo Power	2x250W	2x350W	2x500W	2x650W	2x800W	2x1100W	2x1300W	2x1500W	2x1800W	2x2000W
立体声输出功率 4Ω Stereo Power	2x400W	2x550W	2x800W	2x1000W	2x1300W	2x1700W	2x2000W	2x2300W	2x2800W	2x3000W
立体声输出功率 2Ω Stereo Power	2x650W	2x900W	2x1300W	2x1400W	2x1800W	2x2300W	2x2700W	2x3100W	2x3800W	2x4000W
桥接单声道输出 8 BTL	800W	1100W	1600W	2000W	2500W	3500W	4100W	4700W	5500W	6300W
桥接单声道输出 4 BLT	1100W	1500W	2100W	2800W	3400W	4700W	5500W	6400W	7400W	8500W
频率响应 Frequency Response	20-20000Hz(±0.3dB)									
总谐波失真 THD+N	>0.08%1KHz									
信噪比 S/N Ratio	>100dB									
瞬态响应 Slew Ratio	>30V/μS									
阻尼系数 Damping Factor	>500:1									
串音 Crosstalk	>90dB@1KHz									
输入阻抗 Input Impedance	30Kfi(Balanced,Stereo) 15KO(Blanced,Paralled)									
输入灵敏度 Input Sensitivity	0.775V/1.0V/1.4V									
高度 Height										
尺寸 Packing Dimension										
	2U				3U				3U	
	510x483x90mm				560x483x133mm				655x483x133mm	



性能特点:

- 立体声/并联/桥式单声道模式。
- 用户可选择的输入灵敏度 - 0.775V 和 1.4V。
- 高效的强制风冷可防止设备过热。
- 电子均衡 RCA 和 XLR 输入；接线柱和 Speakon 输出。
- 两个电平控件、电源开关、电源 LED 以及六个可显示每个声道是否有信号、削波和故障的 LED 指示灯。
- 短路、空载、开/关低频噪音和无线电波干扰保护。



Feature:

- Stereo/parallel/bridge-mono mode.
- User selectable input sensitivity - 0.775V and 1.4V.
- Efficient forced-air cooling prevents excessive thermal buildup.
- Electronically balanced RCA & XLR inputs; binding post and Speakon outputs.
- Two level controls, power switch, power LED, and six LEDs which indicate signal presence, clip and fault for each channel.
- Protection against shorts, no-load, on/off thumps and radio-frequency interference.

技术参数 / Specification

型号 Model	XLi800	XLi1500	XLi2500	XLi3500
立体声输出功率 8Ω Stereo Power	2x400W	2x600W	2x800W	2x1200W
立体声输出功率 4Ω Stereo Power	2x600W	2x900W	2x1200W	2x1800W
立体声输出功率 2Ω Stereo Power	2x800W	2x1200W	2x1600W	2x2400W
桥接单声道输出 8 BTL	900W	1900W	2800W	3800W
桥接单声道输出 4 BLT	1200W	2500W	3800W	5000W
频率响应 Frequency Response	20Hz-20 kHz, +0/-1dB (@ 1 W)			
总谐波失真 THD+N	<0.5%, 20Hz-20kHz			
信噪比 S/N Ratio	>100dB			
瞬态响应 Slew Ratio	>10V/uS			
阻尼系数 Damping Factor	(8 ohms, 10Hz to 400Hz) > 200			
串音 Crosstalk	-75dB, -59dB			
输入阻抗 Input Impedance	20KΩ(Balanced,Stereo) 10KΩ(Balanced,Paralled)			
输入灵敏度 Input Sensitivity	0.775V/1.0V/1.4V			
高度 Height	2U			
尺寸 Packing Dimension	400x483x90mm			



性能特点:

- 采用A级硅钢片大功率环形变压器，令音质更加细腻、强劲厚实。而元器件在实践中不断改良，精选匹配、制作精细。
- 全部引入AI自动化机械插件和SMD贴片制作工艺。大大提高了产品的焊接可靠性和一致性。
- 提供高质量的声音和高阻尼系数，高效自动变速散热系统，保证功放长时间稳定工作。
- 此线路在时间的推动下不断完善成熟，同时也在不断完成新的突破，使它更力完美。



Feature:

- Adopts A grade toroidal transformer, very close to no EMI, and deliver more delicate sound. Components are carefully selected to match the circuits design.
- All adopts AI automated mechanical plug-in and SMD production process. Improve the reliability and consistency of the product welding.
- Deliver high-quality sound and high damping factor, with ultra fast switching diode fan, to ensure a stable working state for a long time performance.
- This circuits design have been improved during the practical experience. And it will be continuously updated in the future as well.

技术参数 / Specification

型号 Model	E5300	E6300	E7300	E8300	E9300	E7900	E8900	E9900		
立体声输出功率 8Ω Stereo Power	2x250W	2x350W	2x500W	2x650W	2x800W	2x1100W	2x1300W	2x1500W	2x1800W	2x2000W
立体声输出功率 4Ω Stereo Power	2x400W	2x550W	2x800W	2x1000W	2x1300W	2x1700W	2x2000W	2x2300W	2x2800W	2x3000W
立体声输出功率 2Ω Stereo Power	2x650W	2x900W	2x1300W	2x1400W	2x1800W	2x2300W	2x2700W	2x3100W	2x3800W	2x4000W
桥接单声道输出 8 BTL	800W	1100W	1600W	2000W	2500W	3500W	4100W	4700W	5500W	6300W
桥接单声道输出 4 BLT	1100W	1500W	2100W	2800W	3400W	4700W	5500W	6400W	7400W	8500W
频率响应 Frequency Response	20-20000Hz(±0.3dB)									
总谐波失真 THD+N	>0.08%1KHz									
信噪比 S/N Ratio	>100dB									
瞬态响应 Slew Ratio	>30V/uS									
阻尼系数 Damping Factor	>500:1									
串音 Crosstalk	>90dB@1KHz									
输入阻抗 Input Impedance	30Kfi(Balanced,Stereo) 15KO(Blanced,Paralled)									
输入灵敏度 Input Sensitivity	0.775V/1.0V/1.4V									
高度 Height										
尺寸 Packing Dimension	2U 510x483x90mm				3U 560x483x133mm			3U 655x483x133mm		



性能特点:

- 简单、直观的设置，可灵活调整音乐效果。
- 采用A级硅钢片大功率环形变压器，令音质更加细腻、强劲厚实。而元器件在实践中不断改良，精选匹配、制作精细。
- 全部引入AI自动化机械插件和SMD贴片制作工艺。大大提高了产品的焊接可靠性和一致性。
- 提供高质量的声音和高阻尼系数，高效自动变速散热系统，保证功放长时间稳定工作。
- 此线路在时间的推动下不断完善成熟，同时也在不断完成新的突破，使它更力完美。



Feature:

- Simple and friendly setting design,gives easier and flexible adjustment to the music effects.
- Adopts A grade toroidal transformer, very close to no EMI, and deliver more delicate sound. Components are carefully selected to match the circuits design.
- All adopts AI automated mechanical plug-in and SMD production process. Improve the reliability and consistency of the product welding.
- Deliver high-quality sound and high damping factor, with ultra fast switching diode fan, to ensure a stable working state for a long time performance.
- This circuits design have been improved during the practical experience. And it will be continuously updated in the future as well.

技术参数 / Specification

型号 Model	PX3	PX6	PX8	PX10	PX13	PX15	PX18	PX20	PX30
立体声输出功率 8Ω Stereo Power	2x350W	2x500W	2x650W	2x800W	2x1100W	2x1300W	2x1500W	2x1800W	2x2000W
立体声输出功率 4Ω Stereo Power	2x550W	2x800W	2x1000W	2x1300W	2x1700W	2x2000W	2x2300W	2x2800W	2x3000W
立体声输出功率 2Ω Stereo Power	2x900W	2x1300W	2x1400W	2x1800W	2x2300W	2x2700W	2x3100W	2x3800W	2x4000W
桥接单声道输出 8 BTL	1100W	1600W	2000W	2500W	3500W	4100W	4700W	5500W	6300W
桥接单声道输出 4 BLT	1500W	2100W	2800W	3400W	4700W	5500W	6400W	7400W	8500W
频率响应 Frequency Response	20-20000Hz(±0.3dB)								
总谐波失真 THD+N	>0.08%KHz								
信噪比 S/N Ratio	>100dB								
瞬态响应 Slew Ratio	>30V/uS								
阻尼系数 Damping Factor	>500:1								
串音 Crosstalk	>90dB@1KHz								
输入阻抗 Input Impedance	30Kfi(Balanced,Stereo) 15KO(Blanced,Paralled)								
输入灵敏度 Input Sensitivity	0.775V/1.0V/1.4V								
高度 Height	2U			3U			3U		
尺寸 Packing Dimension	510x483x90mm			560x483x133mm			655x483x133mm		



图1 专业功放前面板图

性能特点:

- 采用先进的电路设计，提高了功放的使用效率，降低了整机的工作温度，提高整机长期工作的稳定性。
- 采用大容量滤波电容、高品质音频大功率输出管，大型散热及无极变速控制式散热风扇，保证功率放大器工作在最佳状态。
- 设有压限保护、直流输出保护、输出短路保护、开机冲击电流保护及温度保护等多种完善保护电路确保音响系统更加安全可靠。
- 多种工作电平指示灯，使功放工作状态一目了然。
- 备有XLR卡侬输入插座，方便连接输入信号。
- 使用符合国际安全标准设计的接线柱和音箱螺栓座SPENKON输出插座，确保输出连接牢固可靠。
- 设有单声道/立体声桥接等多种输入模式，满足各种不同的使用需要。



Feature:

- Advanced circuit design improves the efficiency of the amplifier, producing less heat while operating, giving the long time working a reliable guarantee.
- Adopts filter capacitors and high quality transistor, with well designed cooling system, to provide the perfect working condition.
- Voltage limit is set, DC output protection, short circuit protection, on/off protection, over load protection and over heat protection is provided.
- Multiple operating level indicators, it makes working status clear with XLR input jack, using international safety standard terminals and SPENKON socket.
- Built with bridged/mono stereo mode and other optional input mode, to meet the variety of application needs.

技术参数 / Specification

型号 Model	AMP-512	AMP-612	AMP-712	AMP-812	AMP-912	AMP-2200	AMP-3200	AMP-5200	AMP-6200	AMP-8200
立体声输出功率 8Ω Stereo Power	2x250W	2x350W	2x500W	2x650W	2x800W	2x1100W	2x1300W	2x1500W	2x1800W	2x2000W
立体声输出功率 4Ω Stereo Power	2x400W	2x550W	2x800W	2x1000W	2x1300W	2x1700W	2x2000W	2x2300W	2x2800W	2x3000W
立体声输出功率 2Ω Stereo Power	2x650W	2x900W	2x1300W	2x1400W	2x1800W	2x2300W	2x2700W	2x3100W	2x3800W	2x4000W
桥接单声道输出 8 BTL	800W	1100W	1600W	2000W	2500W	3500W	4100W	4700W	5500W	6300W
桥接单声道输出 4 BLT	1100W	1500W	2100W	2800W	3400W	4700W	5500W	6400W	7400W	8500W
频率响应 Frequency Response	20-20000Hz(±0.3dB)									
总谐波失真 THD+N	>0.08%KHz									
信噪比 S/N Ratio	>100dB									
瞬态响应 Slew Ratio	>30V/μS									
阻尼系数 Damping Factor	>500:1									
串音 Crosstalk	>90dB@1KHz									
输入阻抗 Input Impedance	30Kf(Balanced, Stereo) 15KO(Blanced, Paralled)									
输入灵敏度 Input Sensitivity	0.775V/1.0V/1.4V									
高度 Height	2U				3U			3U		
尺寸 Packing Dimension	510x483x90mm				560x483x133mm			655x483x133mm		



性能特点:

- 采用先进的电路设计, 提高了功放的使用效率, 降低了整机的工作温度, 提高整机长期工作的稳定性。
- 采用大容量滤波电容、高品质音频大功率输出管, 大型散热及无极变速控制式散热风扇, 保证功率放大器工作在最佳状态。
- 设有压限保护、直流输出保护、输出短路保护、开机冲击电流保护及温度保护等多种完善保护电路确保音响系统更加安全可靠。
- 多种工作电平指示灯, 使功放工作状态一目了然。
- 备有XLR卡侬输入插座, 方便连接输入信号。
- 使用符合国际安全标准设计的接线柱和音箱螺栓座SPENKON输出插座, 确保输出连接牢固可靠。
- 设有单声道/立体声桥接等多种输入模式, 满足各种不同的使用需要。



Feature:

- Advanced circuit design improves the efficiency of the amplifier, producing less heat while operating, gives the long time working a reliable guarantee.
- Adopts filter capacitors and high quality transistor, with well designed cooling system, to provide the perfect working condition.
- Voltage limit is set, DC output protection, short circuit protection, on/off protection, over load protection and over heat protection is provided.
- Multiple operating level indicators, it makes working status clear with XLR input jack, using international safety standard terminals and SPENKON socket.
- Built with bridged/mono stereo mode and other optional input mode, to meet the variety of application needs.

技术参数 / Specification

型号 Model	CS1400	CS2000	CS3000	CS4000	CS5000	CS6000	CS8000
立体声输出功率 8Ω Stereo Power	2x250W	2x350W	2x500W	2x600W	2x750W	2x850W	2x1000W
立体声输出功率 4Ω Stereo Power	2x400W	2x550W	2x800W	2x950W	2x1200W	2x1400W	2x1600W
立体声输出功率 2Ω Stereo Power	2x650W	2x900W	2x1300W	2x1600W	2x1900W	2x2200W	2x2600W
桥接单声道输出 8 BTL	800W	1100W	1600W	1900W	2400W	2700W	3100W
桥接单声道输出 4 BTL	1100W	1500W	2100W	2500W	3200W	3600W	4200W
频率响应 Frequency Response	20-20000Hz(±0.3dB)						
总谐波失真 THD+N	>0.08%1KHz						
信噪比 S/N Ratio	>100dB						
瞬态响应 Slew Ratio	>30V/μS						
阻尼系数 Damping Factor	>300:1						
串音 Crosstalk	>90dB@1KHz						
输入阻抗 Input Impedance	30KΩ(Balanced, Stereo) 15KΩ(Blanced, Paralled)						
输入灵敏度 Input Sensitivity	0.775V/1.0V/1.4V						
高度 Height	2U			3U			
尺寸 Packing Dimension	485x485x90mm				535x485x133mm		



性能特点:

- 采用先进的电路设计, 提高了功放的使用效率, 降低了整机的工作温度, 提高整机长期工作的稳定性。
- 采用大容量滤波电容、高品质音频大功率输出管, 大型散热及无极变速控制式散热风扇, 保证功率放大器工作在最佳状态。
- 设有压限保护、直流输出保护、输出短路保护、开机防冲击电流保护及温度保护等多种完善保护电路确保音响系统更加安全可靠。
- 多种工作电平指示灯, 使功放工作状态一目了然。
- 备有XLR卡侬输入插座, 方便连接输入信号。
- 使用符合国际安全标准设计的接线柱和音箱螺栓座SPENKON输出插座, 确保输出连接牢固可靠。
- 设有单声道/立体声桥接等多种输入模式, 满足各种不同的使用需要。



Feature:

- Advanced circuit design improves the efficiency of the amplifier, producing less heat while operating, gives the long time working a reliable guarantee.
- Adopts filter capacitors and high quality transistor, with well designed cooling system, to provide the perfect working condition.
- Voltage limit is set, DC output protection, short circuit protection, on/off protection, over load protection and over heat protection is provided.
- Multiple operating level indicators, it makes working status clear with XLR input jack, using international safety standard terminals and SPENKON socket.
- Built with bridged/mono stereo mode and other optional input mode, to meet the variety of application needs.

技术参数 / Specification

型号 Model	RMX850	RMX1450	RMX1850HD	RMX2450	RMX3050	RMX4050HD	RMX5050
立体声输出功率 8Ω Stereo Power	2x250W	2x350W	2x500W	2x650W	2x800W	2x1000W	2x1200W
立体声输出功率 4Ω Stereo Power	2x400W	2x550W	2x750W	2x1000W	2x1200W	2x1500W	2x1800W
立体声输出功率 2Ω Stereo Power	2x550W	2x750W	2x1000W	2x1350W	2x1600W	2x2000W	2x2400W
桥接单声道输出 8 BTL	800W	1100W	1600W	2000W	2500W	3100W	3800W
桥接单声道输出 4 BLT	1100W	1500W	2100W	2800W	3400W	4200W	5000W
频率响应 Frequency Response	20-20000Hz(±0.3dB)						
总谐波失真 THD+N	>0.08%1KHz						
信噪比 S/N Ratio	>100dB						
瞬态响应 Slew Ratio	>30V/μS						
阻尼系数 Damping Factor	>300:1						
串音 Crosstalk	>90dB@1KHz						
输入阻抗 Input Impedance	30Kfi(Balanced,Stereo) 15KO(Blanced,Paralled)						
输入灵敏度 Input Sensitivity	0.775V/1.0V/1.4V						
高度 Height	2U				3U		
尺寸 Packing Dimension	465x483x90mm				515x483x133mm		



性能特点:

- 采用先进的电路设计，提高了功放的使用效率，降低了整机的工作温度，提高整机长期工作的稳定性。
- 采用大容量滤波电容、高品质音频大功率输出管，大型散热及无极变速控制式散热风扇，保证功率放大器工作在最佳状态。
- 设有压限保护、直流输出保护、输出短路保护、开机冲击电流保护及温度保护等多种完善保护电路确保音响系统更加安全可靠。
- 多种工作电平指示灯，使功放工作状态一目了然。
- 备有XLR卡侬输入插座，方便连接输入信号。
- 使用符合国际安全标准设计的接线柱和音箱螺栓座SPENKON输出插座，确保输出连接牢固可靠。
- 设有单声道/立体声桥接等多种输入模式，满足各种不同的使用需要。



Feature:

- Advanced circuit design improves the efficiency of the amplifier, producing less heat while operating, giving the long time working a reliable guarantee.
- Adopts filter capacitors and high quality transistor, with well designed cooling system, to provide the perfect working condition.
- Voltage limit is set, DC output protection, short circuit protection, on/off protection, over load protection and over heat protection is provided.
- Multiple operating level indicators, it makes working status clear with XLR input jack, using international safety standard terminals and SPENKON socket.
- Built with bridged/mono stereo mode and other optional input mode, to meet the variety of application needs.

技术参数 / Specification

型号 Model	P2500S	P3500S	P5000S	P7000S	P7500S	P8500S	P9000S	P9500S
立体声输出功率 8Ω Stereo Power	2x250W	2x350W	2x500W	2x600W	2x650W	2x750W	2x850W	2x1000W
立体声输出功率 4Ω Stereo Power	2x400W	2x550W	2x800W	2x950W	2x1000W	2x1200W	2x1400W	2x1600W
立体声输出功率 2Ω Stereo Power	2x650W	2x900W	2x1300W	2x1600W	2x1600W	2x1900W	2x2200W	2x2600W
桥接单声道输出 8 BTL	800W	1100W	1600W	1900W	2000W	2400W	2700W	3100W
桥接单声道输出 4 BLT	1100W	1500W	2100W	2500W	2800W	3200W	3600W	4200W
频率响应 Frequency Response	20-20000Hz(±0.3dB)							
总谐波失真 THD+N	>0.08%1KHz							
信噪比 S/N Ratio	>100dB							
瞬态响应 Slew Ratio	>30V/uS							
阻尼系数 Damping Factor	>300:1							
串音 Crosstalk	>90dB@1KHz							
输入阻抗 Input Impedance	30Kf(Balanced, Stereo) 15KO(Balanced, Paralled)							
输入灵敏度 Input Sensitivity	0.775V/1.0V/1.4V							
高度 Height	2U				3U			
尺寸 Packing Dimension	510x486x90mm				545x486x133mm			



性能特点:

- XM系列运用了世界先进的线性H类电树支技术核心。
- 采用音频专用超大环型变压器和超大容量的滤波电容，给功放提供超过额定功率两倍的功率储备和极佳的充放电速度，令整机动态响应表现更为出色。
- XM系列具有性价比高、稳定性强和强劲的输出功率而受到广大用户的青睐。
- 全方位保护电路：带有过流、直流、过热、短路、主电源保险丝等保护电路来保证整机的安全，令用户使用起来更加安全放心。
- 内置固定可选高/中/低音分频器，完美配合不同的音箱设备。



Feature:

- XM series adopts the most advanced technical circuits design--class H.
- With cost-effective, highly reliable and strong power is favored by most of the customers.
- With audio-specific ultra-large toroidal transformer and large capacity filter capacitor to provide more than twice rated power reserve and excellent charge and discharge speed,so that the overall dynamic response performance can be even better.
- Fully protection circuit: with over-current, DC, overheating, short circuit, the main power fuse and so on protection circuit to ensure the safety of the whole unit, to enable users using it more safely and securely.
- Built-in fixed optional high/ medium/ bass Crossover, perfect for different speaker equipment.

技术参数 / Specification

型号 Model	XM4400	XM4600	XM4800
立体声输出功率 8Ω Stereo Power	4x400W	4x600W	4x800W
立体声输出功率 4Ω Stereo Power	4x600W	4x900W	4x1200W
立体声输出功率 2Ω Stereo Power	4x800W	4x1200W	4x1600W
桥接单声道输出 8 BTL	900W	1800W	2400W
频率响应 Frequency Response	20-20000Hz(±0.3dB)		
总谐波失真 THD+N	>0.08%1KHz		
信噪比 S/N Ratio	>100dB		
瞬态响应 Slew Ratio	>30V/uS		
阻尼系数 Damping Factor	>500:1		
串音 Crosstalk	>90dB@1KHz		
输入阻抗 Input Impedance	30KΩ(Balanced,Stereo) 15KΩ(Balanced,Paralled)		
输入灵敏度 Input Sensitivity	0.775V/1.0V/1.4V		
高度 Height	2U		
尺寸 Packing Dimension	495x483x90mm		



性能特点:

- GK系列运用了世界先进的线性H类电树技术核心。
- 采用音频专用超大环型变压器和超大容量的滤波电容，给功放提供超过额定功率两倍的功率储备 和极佳的充放电速度，令整机动态响应表现更为出色。
- GK系列具有性价比、稳定性强和强劲的输出功率而受到广大用户的青睐。
- 全方位保护电路：带有过流、直流、过热、短路、主电源保险丝等保护电路来保证整机的安全，令 用户使用起来更加安全放心。
- 内置固定可选高/中/低音分频器，完美配合不同的音箱设备。

Feature:

- GK series adopts the most advanced technical circuits design--class H.
- With cost-effective, highly reliable and strong power is favored by most of the customers.
- With audio-specific ultra-large toroidal transformer and large capacity filter capacitor to provide more than twice rated power reserve and excellent charge and discharge speed,so that the overall dynamic



response performance can be even better.

- Fully protection circuit: with over-current, DC, overheating, short circuit, the main power fuse and so on protection circuit to ensure the safety of the whole unit, to enable users using it more safely and securely.
- Built-in fixed optional high/ medium/ bass Crossover, perfect for different speaker equipment.

技术参数 / Specification

型号 Model	GK6	GK8	GK10	GK12	GK14
立体声输出功率 8Ω Stereo Power	2x600W	2x800W	2x1000W	2x1200W	2x1400W
立体声输出功率 4Ω Stereo Power	2x900W	2x1200W	2x1500W	2x1900W	2x2100W
立体声输出功率 2Ω Stereo Power	2x1200W	2x1600W	2x2000W	2x2400W	2x2800W
桥接单声道输出 8 BTL	1800W	2400W	2800W	3600W	4000W
频率响应 Frequency Response	20-20000Hz(±0.3dB)				
总谐波失真 THD+N	>0.08%1KHz				
信噪比 S/N Ratio	>100dB				
瞬态响应 Slew Ratio	>30V/μS				
阻尼系数 Damping Factor	>500:1				
串音 Crosstalk	>90dB@1KHz				
输入阻抗 Input Impedance	30KΩ(Balanced,Stereo) 15KΩ(Balanced,Paralled)				
输入灵敏度 Input Sensitivity	0.775V/1.0V/1.4V				
高度 Height	2U			3U	
尺寸 Packing Dimension	495x483x90mm			625x483x133mm	



性能特点:

- 采用A级硅钢片大功率环形变压器，令音质更加细腻、强劲厚实。而元器件在实践中不断改良，精选匹配、制作精细。
- 全部引入AI自动化机械插件和SMD贴片制作工艺。大大提高了产品的焊接可靠性和一致性。
- 提供高质量的声音和高阻尼系数，高效自动变速散热系统，保证功放长时间稳定工作。
- 此线路在时间的推动下不断完善成熟，同时也在不断完成新的突破，使它更力完美。



Feature:

- Adopts A grade toroidal transformer, very close to no EMI, and deliver more delicate sound. Components are carefully selected to match the circuits design.
- All adopts AI automated mechanical plug-in and SMD production process. Improve the reliability and consistency of the product welding.
- Deliver high-quality sound and high damping factor, with ultra fast switching diode fan, to ensure a stable working state for a long time performance.
- This circuits design have been improved during the practical experience. And it will be continuously updated in the future as well.

技术参数 / Specification

型号 Model	AP -2.4	AP -2.6	AP -2.9	AP -2.12	AP -2.18	AP -2.20	AP -2.30	AP -2.50	AP -2.80
立体声输出功率 8Ω Stereo Power	2x350W	2x500W	2x650W	2x800W	2x1100W	2x1300W	2x1500W	2x1800W	2x2000W
立体声输出功率 4Ω Stereo Power	2x550W	2x800W	2x1000W	2x1300W	2x1700W	2x2000W	2x2300W	2x2800W	2x3000W
立体声输出功率 2Ω Stereo Power	2x900W	2x1300W	2x1400W	2x1800W	2x2300W	2x2700W	2x3100W	2x3800W	2x4000W
桥接单声道输出 8 BTL	1100W	1600W	2000W	2500W	3500W	4100W	4700W	5500W	6300W
桥接单声道输出 4 BLT	1500W	2100W	2800W	3400W	4700W	5500W	6400W	7400W	8500W
频率响应 Frequency Response	20-20000Hz(±0.3dB)								
总谐波失真 THD+N	>0.08%1KHz								
信噪比 S/N Ratio	>100dB								
瞬态响应 Slew Ratio	>30V/μS								
阻尼系数 Damping Factor	>500:1								
串音 Crosstalk	>90dB@1KHz								
输入阻抗 Input Impedance	30Kfi(Balanced,Stereo) 15KO(Blanced,Paralled)								
输入灵敏度 Input Sensitivity	0.775V/1.0V/1.4V								
高度 Height									
尺寸 Packing Dimension	2U			3U			3U		
	510x483x90mm			560x483x133mm			655x483x133mm		



性能特点:

- AP系列运用了世界先进的线性H类电桥技术核心。
- 采用音频专用超大环型变压器和超大容量的滤波电容，给功放提供超过额定功率两倍的功率储备和极佳的充放电速度，令整机动态响应表现更为出色。
- AP系列具有性价比高、稳定性强和强劲的输出功率而受到广大用户的青睐。
- 全方位保护电路：带有过流、直流、过热、短路、主电源保险丝等保护电路来保证整机的安全，令用户使用起来更加安全放心。
- 内置固定可选高/中/低音分频器，完美配合不同的音箱设备。



Feature:

- AP series adopts the most advanced technical circuits design--class H.
- With cost-effective, highly reliable and strong power is favored by most of the customers.
- With audio-specific ultra-large toroidal transformer and large capacity filter capacitor to provide more than twice rated power reserve and excellent charge and discharge speed, so that the overall dynamic response performance can be even better.
- Fully protection circuit: with over-current, DC, overheating, short circuit, the main power fuse and so on protection circuit to ensure the safety of the whole unit, to enable users using it more safely and securely.
- Built-in fixed optional high/ medium/ bass Crossover, perfect for different speaker equipment.

技术参数 / Specification

型号 Model	AP-4.4	AP-4.6	AP-4.8	AP-4.10	AP-4.12	AP-4.15
立体声输出功率 8Ω Stereo Power	4x400W	4x600W	4x800W	4x1000W	4x1200W	4x1500W
立体声输出功率 4Ω Stereo Power	4x600W	4x900W	4x1200W	4x1500W	4x1900W	4x2300W
立体声输出功率 2Ω Stereo Power	4x800W	4x1200W	4x1600W	4x2000W	4x2400W	4x3000W
桥接单声道输出 8 BTL	900W	1800W	2400W	3000W	3600W	4200W
频率响应 Frequency Response	20-20000Hz(±0.3dB)					
总谐波失真 THD+N	>0.08%1KHz					
信噪比 S/N Ratio	>100dB					
瞬态响应 Slew Ratio	>30V/μS					
阻尼系数 Damping Factor	>500:1					
串音 Crosstalk	>90dB@1KHz					
输入阻抗 Input Impedance	30Kf(Balanced,Stereo) 15KO(Balanced,Paralled)					
输入灵敏度 Input Sensitivity	0.775V/1.0V/1.4V					
高度 Height	2U			3U		
尺寸 Packing Dimension	520x480x90mm			580x483x133mm		



性能特点：

- KTB系列在设计上采用了安森美功放管，进一步优化了整个系统，更加精准地满足了各种不同的需求。
- KTB系列产品带有可调的输出电压限制器，使放大器可适用于任何系统。
- 全方位保护系统：带有过流，直流，高频率（VHF），短路，主电源保险丝等保护电路和软启动电路。
- 开关电源线路设计，发热量少，配置4个无极变速控制散热风扇，使功放放在极恶劣的条件下，依然保持出色的工作。



Feature:

- KTB series adopts ON Semiconductor transistor, makes further efforts to optimize the entire system, and meet various needs.
- KTB series come with VPL adjustable output voltage limiter, and this amplifier is applied to any system.
- Full protected system,such as: over current, DC, the very-high frequency (VHF), short-circuits, the main power fuse protection circuitry and soft-star circuit.
- TD circuitry design, produce less heat, built with 4 infinitely variable speeds fan, to ensure the amplifier working perfectly under harsh conditions.

技术参数 / Specification

型号 Model	WTD-1800	WTD-2000	WTD-2200	WTD-2500
立体声输出功率 8Ω Stereo Power	2x1800W	2x2000W	2x2200W	2X2500
立体声输出功率 4Ω Stereo Power	2x2700W	2x3000W	2x3300W	2X3800
立体声输出功率 2Ω Stereo Power	2x3600W	2x4000W	2x4400W	2X5000
桥接单声道输出 8 BTL	4000W	5000W	6000W	6800
桥接单声道输出 4 BLT	6400W	7000W	7600W	8800
频率响应 Frequency Response	20-20000Hz(±0.3dB)			
总谐波失真 THD+N	> 0.08%1KHz			
信噪比 S/N Ratio	> 100dB			
瞬态响应 Slew Ratio	> 30V/uS			
阻尼系数 Damping Factor	> 500:1			
串音 Crosstalk	> 90dB@1KHz			
输入阻抗 Input Impedance	30Kfi(Balanced,Stereo) 15KO(Blanced,Paralled)			
输入灵敏度 Input Sensitivity	0.775V/1.0V/1.4V			
高度 Height	3U			
尺寸 Packing Dimension	595x483x133mm			

KTD Series

专业功放 Professional power amplifier



性能特点:

- KTB系列在设计上采用了安森美功放管，进一步优化了整个系统，更加精准地满足了各种不同的需求。
- KTB系列产品带有可调的输出电压限制器，使放大器可适用于任何系统。
- 全方位保护系统：带有过流，直流，高频率（VHF），短路，主电源保险丝等保护电路和软启动电路。
- 开关电源线路设计，发热量少，配置4个无极变速控制散热风扇，使功放放在极恶劣的条件下，依然保持出色的工作。

Feature:

- KTB series adopts ON Semiconductor transistor, makes further efforts to optimize the entire system, and meet various needs.
- KTB series come with VPL adjustable output voltage limiter, and this amplifier is applied to any system.
- Full protected system, such as: over current, DC, the very-high frequency (VHF), short-circuits, the main power fuse protection circuitry and soft-star circuit.
- TD circuitry design, produce less heat, built with 4 infinitely variable speeds fan, to ensure the amplifier working perfectly under harsh conditions.

技术参数 / Specification

型号 Model	KTD-1800	KTD-2000	KTD-2200	KTD-2500
立体声输出功率 8Ω Stereo Power	2x1800W	2x2000W	2x2200W	2x2500
立体声输出功率 4Ω Stereo Power	2x2700W	2x3000W	2x3300W	2x3800
立体声输出功率 2Ω Stereo Power	2x3600W	2x4000W	2x4400W	2x5000
桥接单声道输出 8 BTL	4000W	5000W	6000W	6800
桥接单声道输出 4 BLT	6400W	7000W	7600W	8800
频率响应 Frequency Response	20-20000Hz(±0.3dB)			
总谐波失真 THD+N	> 0.08%1KHz			
信噪比 S/N Ratio	> 100dB			
瞬态响应 Slew Ratio	> 30V/μS			
阻尼系数 Damping Factor	> 500:1			
串音 Crosstalk	> 90dB@1KHz			
输入阻抗 Input Impedance	30Kfi(Balanced,Stereo) 15KO(Blanced,Paralled)			
输入灵敏度 Input Sensitivity	0.775V/1.0V/1.4V			
高度 Height	3U			
尺寸 Packing Dimension	595x483x133mm			



性能特点:

- 采用东芝2S晶体管，高频电容，纯铜变压器。显示模块内置稳定传感器，保证输入电压波动时显示正常工作。
- 经过电路的改进，可以在发电机供电的情况下稳定工作，长时间恶劣环境下，依然保存出色的工作。

Feature:

- Adopts Toshiba 2S transistor and high frequency capacitor, with pure copper transformer. Stabilizing sensor is built in the display module, to ensure that the display work normally even though the input voltage is fluctuating.
- After improved the circuitry, the amplifier be able to work steadily and excellently under harsh situation, such as be powered by generator, long term working...etc

技术参数 / Specification

型号 Model	FW-1500	FW-1800	FW-2000
立体声输出功率 8Ω Stereo Power	2x1500W	2x1800W	2x2000W
立体声输出功率 4Ω Stereo Power	2x2300W	2x2800W	2x3000W
立体声输出功率 2Ω Stereo Power	2x3100W	2x3800W	2x4000W
桥接单声道输出 8 BTL	4700W	5500W	6300W
桥接单声道输出 4 BTL	6400W	7400W	8500W
频率响应 Frequency Response	20-20000Hz(±0.3dB)		
总谐波失真 THD+N	>0.08%1KHz		
信噪比 S/N Ratio	>100dB		
瞬态响应 Slew Ratio	>30V/uS		
阻尼系数 Damping Factor	>500:1		
串音 Crosstalk	>90dB@1KHz		
输入阻抗 Input Impedance	30KΩ(Balanced,Stereo) 15KΩ(Blanced,Paralled)		
输入灵敏度 Input Sensitivity	0.775V/1.0V/1.4V		
高度 Height	3U		
尺寸 Packing Dimension	655x483x133mm		



性能特点:

- 采用独特的双色面板设计，散发出精致气息并提升了音响配置。
- 它采用了强大的安森美 NJW 晶体管和先进的四级 H 类电路，可提升无与伦比的效率。3. 20 个高频滤波电容器，您将随时享受清晰的音频。
- 优质纯铜变压器确保最佳效率和可靠性。
- 此外，这款放大器在 8 欧姆下每通道具有令人印象深刻的 2500 瓦输出，可满足大型户外活动性能需求的功率和质量。

Feature:

- designed with a unique dual-color panel that exudes sophistication and elevates audio setup.
- It features powerful ON NJW transistors and an advanced four-tier H-class circuit gives unparalleled efficiency.
- With 20 high-frequency filtering capacitors, you'll enjoy crystal-clear audio at all times.
- The premium pure copper transformer ensures optimal efficiency and reliability.
- Plus, with an impressive output of 2500 watts per channel at 8 ohms, this amplifier elivers the power and quality that meet large outdoor performance's needs.

技术参数 / Specification

型号 Model	DCX-6000
立体声输出功率 8Ω Stereo Power	2x2500W
立体声输出功率 4Ω Stereo Power	2x3800W
立体声输出功率 2Ω Stereo Power	2x5000W
桥接单声道输出 8 BTL	6800W
桥接单声道输出 4 BLT	8800W
频率响应 Frequency Response	20-20000Hz(±0.3dB)
总谐波失真 THD+N	>0.08%1KHz
信噪比 S/N Ratio	>100dB
瞬态响应 Slew Ratio	>30V/uS
阻尼系数 Damping Factor	>500:1
串音 Crosstalk	>90dB@1KHz
输入阻抗 Input Impedance	30Kfi(Balanced,Stereo) 15KO(Blanced,Paralled)
输入灵敏度 Input Sensitivity	0.775V/1.0V/1.4V
高度 Height	3U
尺寸 Packing Dimension	655x483x133mm



性能特点:

- 大功率强劲输出，专为超低音设计。
- 具有DC保护，温度保护，限流保护和短路保护功能，确保工作安全可靠。
- 特有风扇降燥技术，根据温度实时调整风扇转速。
- 大容量名牌电容，保证功放满负荷时失真更低，低音更加有力。
- 可桥接输出。

Feature:

- with core technology ,perfect sound quality.
- Output is powerful ,comprehensive display of dynamic music.
- Advanced protection circuit ,free installation and debugging.
- Quality trustworthy.



技术参数 / Specification

型号 Model	RM-1300
立体声输出功率 8Ω Stereo Power	2x1300W
立体声输出功率 4Ω Stereo Power	2x2000W
立体声输出功率 2Ω Stereo Power	2x2600W
桥接单声道输出 8 BTL	4000W
桥接单声道输出 4 BLT	5200W
频率响应 Frequency Response	20-20000Hz(±0.3dB)
总谐波失真 THD+N	<0.01%Rated Power@8Ω 1KHz
信噪比 S/N Ratio	>120dB
瞬态响应 Slew Ratio	80V/μs
阻尼系数 Damping Factor	±0.1dB 20Hz-20KHz
串音 Crosstalk	≤-70dB
输入阻抗 Input Impedance	15K/30Kohms unblanced or balanced
输入灵敏度 Input Sensitivity	0.775V/1.0V/1.4V
高度 Height	3U
尺寸 Packing Dimension	655x483x133mm



性能特点:

- 颠覆性1U超薄机身:
轻量化设计, 节省70%机柜空间, 流动演出与固定安装皆宜。
- 殿堂级高保真音质:
专利削峰限幅+波纹消除技术, 三频均衡通透, 低频下潜震撼, 细节分毫毕现。
- 双核高效动力:
LLC软开关电源+主动式PFC, 能效超90%, 全球电压自适应。
- 专业级灵活配置:
立体声/并接/桥接三模式+0.775V-2V输入灵敏度, 完美适配各类音源设备。
- 多重安全防护:
10重电路保护 (过载/短路/过热/浪涌等), 7×24小时稳定护航。



Feature:

- Revolutionary 1U Ultra-Slim Chassis:
Lightweight design saves 70% rack space, ideal for touring systems and fixed installations.
- Studio-Grade Hi-Fi Audio:
Patented Peak Limiter + Ripple Cancellation, balanced frequencies with thunderous bass (<0.03% THD) and crystal-clear detail.
- Dual Power Efficiency:
LLC soft-switching PSU + Active PFC (90%+ efficiency), compatible with 100-240V global voltage.
- Pro-Level Flexibility:
Stereo/Parallel/Bridge modes + 0.775V-2V input sensitivity, seamlessly adapts to all audio sources.
- 10-Layer Protection Shield:
Overload/Short-Circuit/Thermal/Surge protection ensures 24/7 stability under extreme conditions.



技术参数 / Specification

型号 Model	B2-10	B4-10
立体声输出功率 8Ω Stereo Power	2x1000W	4x1000W
立体声输出功率 4Ω Stereo Power	2x1500W	4x1500W
立体声输出功率 2Ω Stereo Power	2x2000W	4x2000W
桥接单声道输出 8 BTL	3100W	3100W
桥接单声道输出 4 BTL	3700W	3700W
频率响应 Frequency Response	20-20000Hz(±0.5dB)	
总谐波失真 THD+N	>0.035%1KHz	
信噪比 S/N Ratio	>106dB	
瞬态响应 Slew Ratio	>30V/uS	
阻尼系数 Damping Factor	>600:1	
串音 Crosstalk	>90dB@1KHz	
输入阻抗 Input Impedance	20Kfi(Paiallel) 10KΩ (non-Paralled)	
输入灵敏度 Input Sensitivity	0.775V/1.0V/1.5V	
高度 Height	1U	
尺寸 Product Dimension	406x481x45mm	

234XL Series

专业均衡器
Professional Products



215 Series

专业均衡器
Professional Products



231 Series

专业均衡器
Professional Products



234XL/215/231 Series

专业均衡器
Professional Products





性能特点:

- 电源时序控制器广泛用于电器设备供电电源的自动控制系统。它精确地监控电压，以正确的时序进行上电和断电同时确保每个电压轨道之间的正确延时。
- 提供多路电源开关通道，单通道的电流为20A，总输入电流容量为50A。
- 每路具有独立开关控制，可随时关闭通道，实现时序功能。
- LED数码管电压显示表。
- 可控输出延时时间为1S。
- 共10路可控8路控制输出，2路直通输出。
- 有空气开关保护，遇到短路，过流现象自动断开总电源。

Feature:

- Power sequence controllers are widely used in automatic control systems of power supplies for electrical equipment. It precisely monitors voltages to power up and down with the correct timing while ensuring correct delays between each voltage rail.
- Provides multiple power switch channels, the current of a single channel is 20A, and the total input current capacity is 50A.
- Each channel has independent switch control, and the channel can be turned on and off at any time to achieve timing functions.
- LED display
- Controllable output delay time is 1S
- There are 10 channels in total, 8 controllable outputs and 2 direct outputs.
- With air switch, when short circuit or overcurrent occurs, the main power supply will be automatically disconnected.

技术参数 / Specification

型号 Model	BX-08	BX-09L	BX-09D
额定输出电压 Rated Output Voltage	AC220V/50Hz	AC220V/50Hz	AC220V/50Hz
可控制电源 Controllable Power Supply	8 channels	8 channels	8 channels
不可控制电源 Uncontrollable Power Supply	1 channels: AC220V/50Hz 30A	1 channels: AC220V/50Hz 30A	1 channels: AC220V/50Hz 30A
每路动作延时时间 Delay Time Of Each Action	1 second	1 second	1 second
单路额定输出功率 Single Channel Rated Output Power	20A	20A	20A
高度 Height	1U	1U	1U
尺寸 Packing Dimension	482x168x48mm	482x168x48mm	482x168x48mm



性能特点:

- 电源时序控制器广泛用于电器设备供电电源的自动控制系统。它精确地监控电压，以正确的时序进行上电和断电同时确保每个电压轨道之间的正确延时。
- 提供多路电源开关通道，单通道的电流为20A，总输入电流容量为50A。
- 每路具有独立开关控制，可随时关启通道，实现时序功能。
- LED数码管电压显示表。
- 可控输出延时时间为1S。
- 共10路可控8路控制输出，2路直通输出。
- 有空气开关保护，遇到短路，过流现象自动断开总电源。

Feature:

- Power sequence controllers are widely used in automatic control systems of power supplies for electrical equipment. It precisely monitors voltages to power up and down with the correct timing while ensuring correct delays between each voltage rail.
- Provides multiple power switch channels, the current of a single channel is 20A, and the total input current capacity is 50A.
- Each channel has independent switch control, and the channel can be turned on and off at any time to achieve timing functions.
- LED display
- Controllable output delay time is 1S
- There are 10 channels in total, 8 controllable outputs and 2 direct outputs.
- With air switch, when short circuit or overcurrent occurs, the main power supply will be automatically disconnected.

技术参数 / Specification

型号 Model	KG-08M	KG-09L	KG-09D
额定输出电压 Rated Output Voltage	AC220V/50Hz	AC220V/50Hz	AC220V/50Hz
可控制电源 Controllable Power Supply	8 channels	8 channels	8 channels
不可控制电源 Uncontrollable Power Supply	1 channels: AC220V/50Hz 30A	1 channels: AC220V/50Hz 30A	1 channels: AC220V/50Hz 30A
每路动作延时时间 Delay Time Of Each Action	1 second	1 second	1 second
单路额定输出电源 Single Channel Rated Output Power	20A	20A	20A
高度 Height	1U	1U	1U
尺寸 Packing Dimension	482x168x48mm	482x168x48mm	482x168x48mm

温馨提示:

由于产品不断改良中，参数可能有更改恕不另行通知，
图片可能与实物稍有差异，应以实物为准！

Products are subject to improve without further notice, design or specification may
not be the same as actual products, please contact for details, thank you.

RXF[®]

恩平市锐星电子科技有限公司

ENPING RUIXING ELECTRONICS TECHNOLOGY CO. LTD

地址：广东省恩平市恩城街道恩洲工业大道中33号（卓信工业园）4栋二楼

Add: 2nd flood, 4th block, Zhuo Xin Industrial Zone, No.33 Enzhou industrial road, Enping City, Guangdong Province, China

电话 (Tel) : 0750-7123793 / 13822322216