

ATIVIDADE 10: SUB-REDES


Rede Classe C 200.175.14.0 dividida em 3 sub-redes com capacidade para 45 hosts.

1. Memória de Cálculo


Para obter 45 hosts, usamos $2^h - 2 \geq 45 \rightarrow h=6$ (62 hosts válidos). A máscara /24 passa para /26 (255.255.255.192). O bloco é de 64.

Sub-rede	Endereço da Sub-rede	Primeiro Válido	Último Válido	Broadcast
Sub-rede 1	200.175.14.0/26	200.175.14.1	200.175.14.62	200.175.14.63
Sub-rede 2	200.175.14.64/26	200.175.14.65	200.175.14.126	200.175.14.127
Sub-rede 3	200.175.14.128/26	200.175.14.129	200.175.14.190	200.175.14.191

2. Topologia de Rede no Packet Tracer

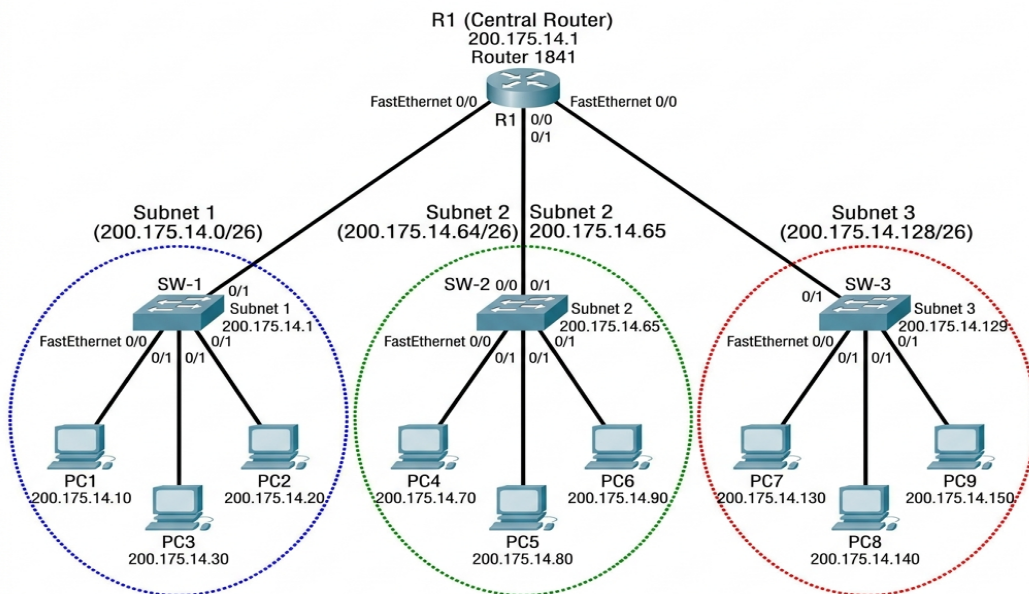

3. Testes de Conectividade (Ping)

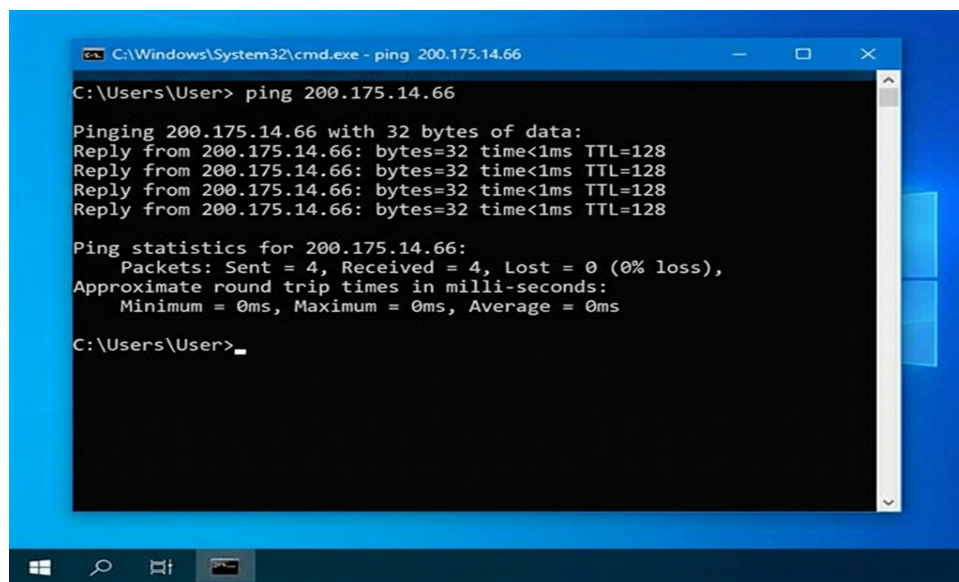

A screenshot of a Windows command prompt window. The title bar reads "C:\Windows\System32\cmd.exe - ping 200.175.14.66". The command prompt shows the user typing "ping 200.175.14.66". The output shows four successful replies from 200.175.14.66, each with 32 bytes of data, a time of less than 1ms, and a TTL of 128. Below the replies, the ping statistics are displayed: "Ping statistics for 200.175.14.66: Packets: Sent = 4, Received = 4, Lost = 0 (0% loss), Approximate round trip times in milli-seconds: Minimum = 0ms, Maximum = 0ms, Average = 0ms". The prompt ends with "C:\Users\User>".

```
C:\Windows\System32\cmd.exe - ping 200.175.14.66
C:\Users\User> ping 200.175.14.66

Pinging 200.175.14.66 with 32 bytes of data:
Reply from 200.175.14.66: bytes=32 time<1ms TTL=128
Reply from 200.175.14.66: bytes=32 time<1ms TTL=128
Reply from 200.175.14.66: bytes=32 time<1ms TTL=128
Reply from 200.175.14.66: bytes=32 time<1ms TTL=128

Ping statistics for 200.175.14.66:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\Users\User>
```