
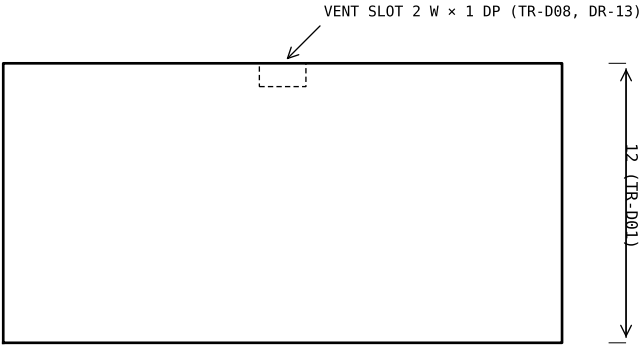


- NOTES:
- 1. INTERPRET PER ASME Y14.5-2018. UNITS mm. UNLESS NOTED: X.X ±0.2, X.XX ±0.05.
 - 2. BREAK ALL EDGES 0.2-0.4 UNLESS NOTED. NO BURRS.
 - 3. VENT ALL BLIND HOLES IN VACUUM-EXPOSED PARTS PER DR-6 (spec/00).
 - 4. PROVENANCE: EVERY DIMENSION TRACES PER THE SIDECAR PROVENANCE FILE OF THIS DRAWING (AIEF).
 - 5. PROBE BORE CONCENTRIC TO PLATE BORE 0.10 TIR AT ASSEMBLY (TR-D03).
 - 6. SPRING PLUNGER PRELOAD 7.5 ±2.5 N, TRAVEL 2.0 MIN (TR-D05/06) – HW IS SPEC-ONLY (BOM).
 - 7. VENT SLOT MUST ALIGN WITH PLATE CROSS-VENT AT INSTALL (spec/09 §10 STEP 7).
 - 8. SC SPRING-CLIP DETAIL: DEFERRED-FEATURE REGISTER – SPEC-ONLY HW, NOT DRAWN.

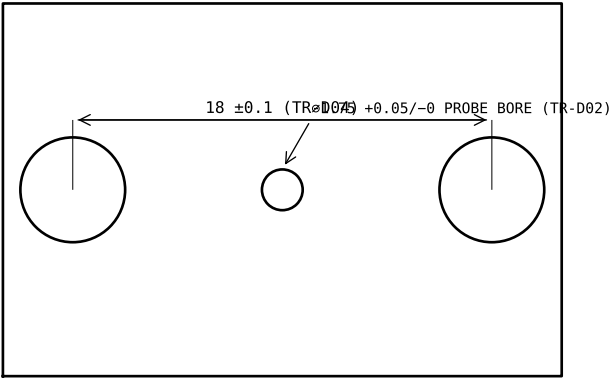

CRITICAL DIMENSIONS (frozen spec, verbatim)

TR-D01	Body envelope	24 × 16 × 12	±0.2
TR-D02	Probe bore	Ø1.75	+0.05 / -0
TR-D03	Probe bore concentricity to the plate bore	–	0.10 TIR
TR-D04	Mounting hole spacing	18.0	±0.1
TR-D05	Spring plunger preload	7.5 N	±2.5 N
TR-D06	Spring working travel	2.0 min	–
TR-D07	Strain-relief clamp bore	Ø3.0	+0.1 / -0
TR-D08	Vent slot (clears the plate cross-vent)	2.0 W × 1.0 D	+0.2 / -0

TITLE	NUMBER	REV
RTD RETAINER SEWCP-1000 – RTD retain	SEWCP-1000-DRW-001 Sh 1	A
MATERIAL	FINISH	SCALE
6061-T6	ALODINE 1200	4:1
UNITS	DATE	ORIGIN
mm	2026-08-11	AIEF autonomous run