
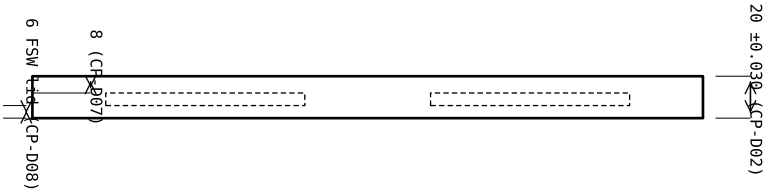


NOTES:

1. INTERPRET PER ASME Y14.5-2018. UNITS mm. UNLESS NOTED: X.X ±0.2, X.XX ±0.05.
2. BREAK ALL EDGES 0.2-0.4 UNLESS NOTED. NO BURRS.
3. VENT ALL BLIND HOLES IN VACUUM-EXPOSED PARTS PER DR-6 (spec/00).
4. PROVENANCE: EVERY DIMENSION TRACES PER THE SIDECAR PROVENANCE FILE OF THIS DRAWING (AIEF).
5. COOLANT CHANNEL PER MDR-001; RIB 5.0 CONFIRMED (ECR-Q-011 DEC-03): FSW RIB PASSES – TAPERED PROBE TIP $\varnothing\leq4.0$, TRACKING $\leq\pm0.5$, PENETRATION 6.5–7.0.
6. FSW LID PER spec/01 §6 STEP 5; RADIOGRAPH PER PROCESS NOTES.
7. CLOCKING PER spec/00 §3.2 – BINDING; DO NOT RE-CLOCK.
8. 2× M6×12 BRACKET TAPS AT r=150, 88°/122°, BOTTOM FACE (CP-IF-8 AS AMENDED, APR-031).

CRITICAL DIMENSIONS (frozen spec, verbatim)

CP-D01	Outside diameter	Ø320.0	±0.10
CP-D02	Overall thickness	20.000	±0.030
CP-D03	Top face flatness	–	0.015 TIR
CP-D04	Top-to-bottom parallelism	–	0.015 TIR
CP-D05	Coolant channel width	10.00	+0.20 / –0
CP-D06	Coolant channel depth	6.00	+0.20 / –0
CP-D07	Channel-to-top-face wall	8.00	±0.20
CP-D08	FSW lid thickness	6.00	±0.10
CP-D09	Kinematic locator counterbore (bottom), Ø306	Ø10.000	H7
CP-D09a	Locator retention tapped hole (bottom), coaxial	M4 × 0.7. Ø3.30 drill	–
CP-D10	Kinematic locator counterbore (top), Ø260	Ø10.000	H7
CP-D10a	Locator retention tapped hole (top), coaxial	M4 × 0.7. Ø3.30 drill	–
CP-D11	Kinematic locator counterbore position	Ø306 / Ø260	□ 00.020 M @ B,C
CP-D12	Lift pin bore	Ø8.000	H8
CP-D13	Lift pin bore position	Ø200 BC	□ 00.050 M @ A,B,C
CP-D14	Lift pin bore perpendicularity to Datum A	–	0.030 over 20 mm
CP-D15	Central He bore	Ø10.000	H8
CP-D16	Vacuum port sealing face (flat, masked, Ø100)	Flatness 0.010, Ra 0.010	–
CP-D17	Choke washer seat pads (16×)	Ø22 flat, coplanar	0.010 TIR set
CP-D18	RF land flatness	60 × 18 land, Ø274 B	0.020 TIR
CP-D19	RTD blind bore (3×, r = 40/100/140 @ 75°/122°)	Ø5.700	H8, depth 12 ±0.2
CP-D20	M6 tapped holes (Ring upper circuit), Ø302	M6 × 1.0 × 12 deep	□ 00.30 □
CP-D21	M5 tapped depth (into Heater Plate side)	–	‘HP-D12’, 6.50 blind
CP-D22	Coolant stub bore (2×), radial at 255° / 285°	Ø6.000	H9

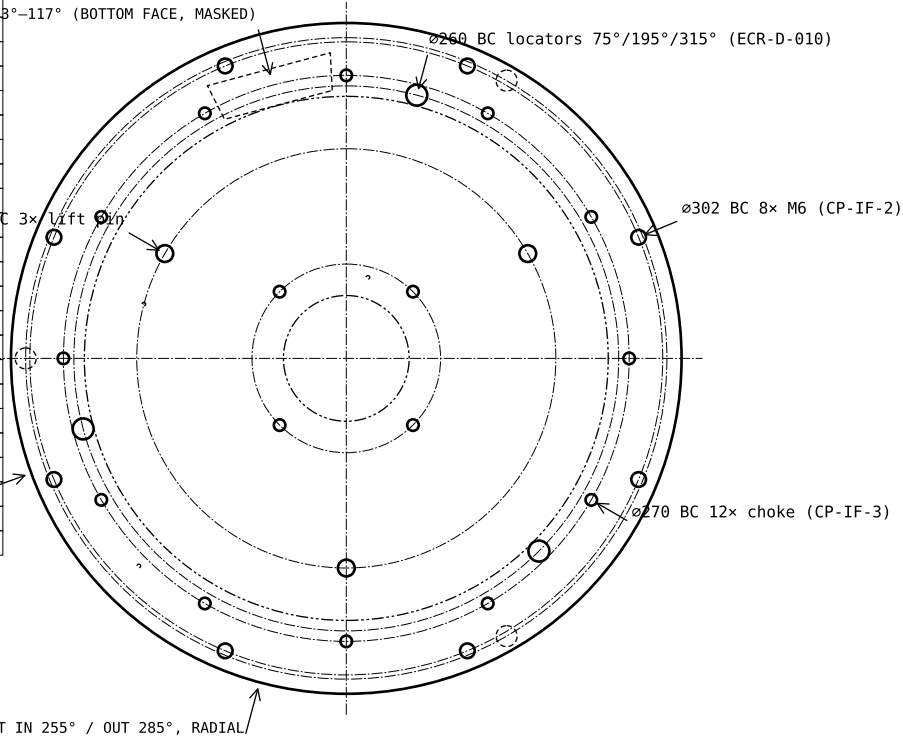

TITLE	NUMBER	REV
COOLING PLATE SEWCP-200 – Geometry	SEWCP-200-DRW-001 Sh 1	A
MATERIAL	FINISH	SCALE
6061-T6	HARD ANODIZE 25–50 µm EXC. MASKS	1:2.8
UNITS	DATE	ORIGIN
mm	2026-08-11	AIEF autonomous run