
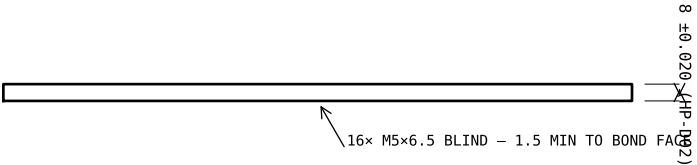


NOTES:

- 1. INTERPRET PER ASME Y14.5-2018. UNITS mm. UNLESS NOTED: X.X ±0.2, X.XX ±0.05.
- 2. BREAK ALL EDGES 0.2-0.4 UNLESS NOTED. NO BURRS.
- 3. VENT ALL BLIND HOLES IN VACUUM-EXPOSED PARTS PER DR-6 (spec/00).
- 4. PROVENANCE: EVERY DIMENSION TRACES PER THE SIDECAR PROVENANCE FILE OF THIS DRAWING (AIEF).
- 5. MI HEATER ELEMENT GROOVES: TWO COUNTER-SPIRALS, BOTTOM FACE; EXACT PATH PER ROUTING RECORD.
- 6. BOND FACE (TOP): Ra ≤ 0.8, FLAT 0.05 – ESC ELASTOMER BOND (HP-IF-4).
- 7. KINEMATIC SLOTS RE-CLOCKED 75°/195°/315° PER ECR-D-010.

CRITICAL DIMENSIONS (frozen spec, verbatim)

HP-D01	Outside diameter	Ø300.0	±0.10
HP-D02	Overall thickness	8.000	±0.020
HP-D03	Bond face flatness	–	0.015 TIR
HP-D04	Choke face flatness	–	0.015 TIR
HP-D05	Bond-face to choke-face parallelism	–	0.015 TIR
HP-D06	Heater groove	3.20 W × 3.20 D	+0.10 / –0
HP-D07	Groove pitch	6.00	±0.10
HP-D08	Groove to bond face (min material)	4.60 min	–
HP-D09	Kinematic slot width	6.05	H8
HP-D10	Kinematic slot length (radial)	8.00	+0.20 / –0
HP-D09a	Kinematic slot depth	3.00	±0.10
HP-D11	Kinematic slot position	Ø260 BC @ 75°/195°/315°	□ Ø0.030 □ A B C
HP-D12	M5 tapped holes (16×), blind from the choke face	M5 × 0.8, 1xD (5.0)	□ Ø0.200 □ A B C
HP-D13	Lift pin clearance bores	Ø6.000	H8, □ Ø0.100 □
HP-D14	He transfer bore	Ø6.000	H8
HP-D15	HV feed bores	Ø8.000	H8, □ Ø0.200 □
HP-D16	Secondary He O-ring groove (top face)	Ø8.0 × 1.90 W × 1.15 D	±0.05
HP-D17	RTD blind bore	Ø1.700	H8, depth 6.0 ±0.2
HP-D18	Bond-face edge break	0.5 × 45°	±0.2
HP-D19	Choke washer thickness (SEWCP-301)	1.500	±0.020 ±0.010

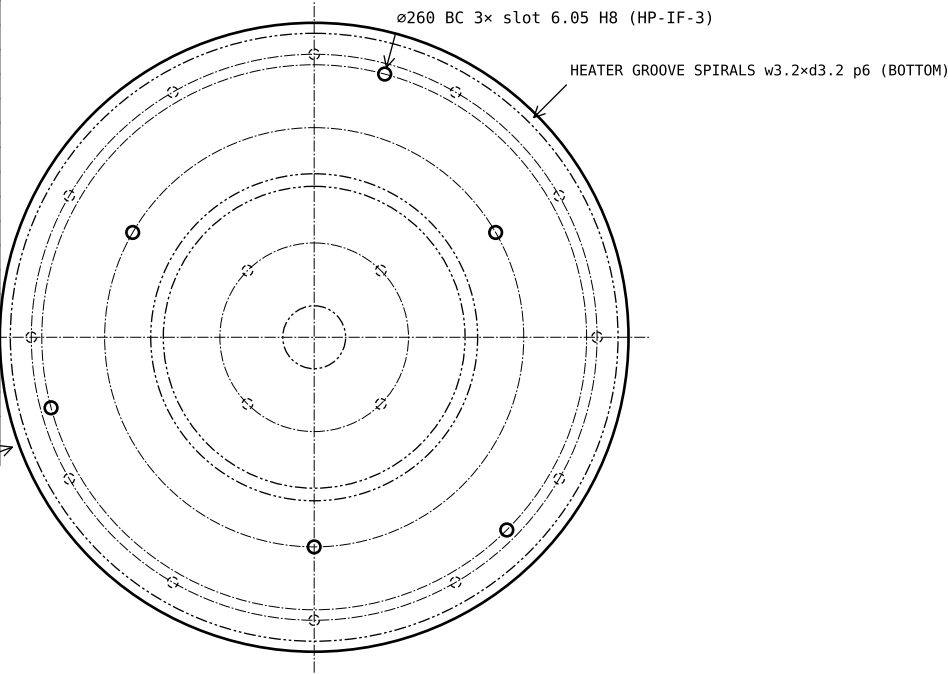

TITLE	NUMBER	REV
HEATER PLATE SEWCP-300 – Geometry	SEWCP-300-DRW-001 Sh 1	A
MATERIAL	FINISH	SCALE
6061-T6	CLEAN PER SEMI; NO ANODIZE ON BOND FACE	2:1
UNITS	DATE	ORIGIN
mm	2026-08-11	AIEF autonomous run