


NOTES:

- 1. INTERPRET PER ASME Y14.5-2018. UNITS mm. UNLESS NOTED: X.X ±0.2, X.XX ±0.05.
- 2. BREAK ALL EDGES 0.2-0.4 UNLESS NOTED. NO BURRS.
- 3. VENT ALL BLIND HOLES IN VACUUM-EXPOSED PARTS PER DR-6 (spec/00).
- 4. PROVENANCE: EVERY DIMENSION TRACES PER THE SIDECAR PROVENANCE FILE OF THIS DRAWING (AIEF).
- 5. CERAMIC: COMPRESSION ONLY, NO THREADS (spec/00 §9 CERAMIC JOINT RULE).
- 6. TOP FACE LAPPED AT ASSEMBLY FROM AS-BUILT STACK DATA (spec/00 §5.3, DR-3).
- 7. REGISTER REBATE PER SR-D16 REGISTER – DEGENERATE ROWS TABULATED, CANDIDATE ECR-Q (CARRIED).
- 8. EDGE BREAK ALL CERAMIC EDGES 0.3–0.5 × 45° (CERAMIC EDGE-BREAK STANDARD NOTE).

CRITICAL DIMENSIONS (frozen spec, verbatim)

SR-D01	Overall height, as supplied	20.300	−0 / +0.050
SR-D02	Overall height, after assembly lap	Per DR-3	±0.015
SR-D03	Bottom face flatness (post-lap)	–	0.010 TIR
SR-D04	Top-to-bottom parallelism (post-lap)	–	0.010 TIR
SR-D05	Web outside diameter	Ø300.0	±0.15
SR-D06	Web inside diameter	Ø294.0	±0.15
SR-D07	Web wall thickness	3.00	±0.15
SR-D08	Web height	14.00	±0.10
SR-D09	Flange outside diameter	Ø318.0	±0.15
SR-D10	Flange inside diameter	Ø286.0	±0.15
SR-D11	Flange thickness (each)	3.00	±0.05
SR-D12	Web-to-flange fillet	R3.0	+0.5 / −0
SR-D13	Bolt clearance holes (16 total, 8 per flange)	Ø7.0	+0.2 / −0
SR-D14	Bolt hole circle	Ø302.0	□ 00.30
SR-D15	Bolt hole edge chamfer, both sides	0.3 × 45°	±0.15
SR-D16	Clamp ring register counterbore	Ø318.5 / Ø285.5 × 0.3	+0.10 / −0
SR-D17	Kinematic slot width	6.05	H8
SR-D18	Kinematic slot length (radial)	8.00	+0.20 / −0
SR-D19	Kinematic slot depth	3.00	±0.10
SR-D20	Kinematic slot position	Ø306 BC	□ 00.30 ±0.10 FLANGE

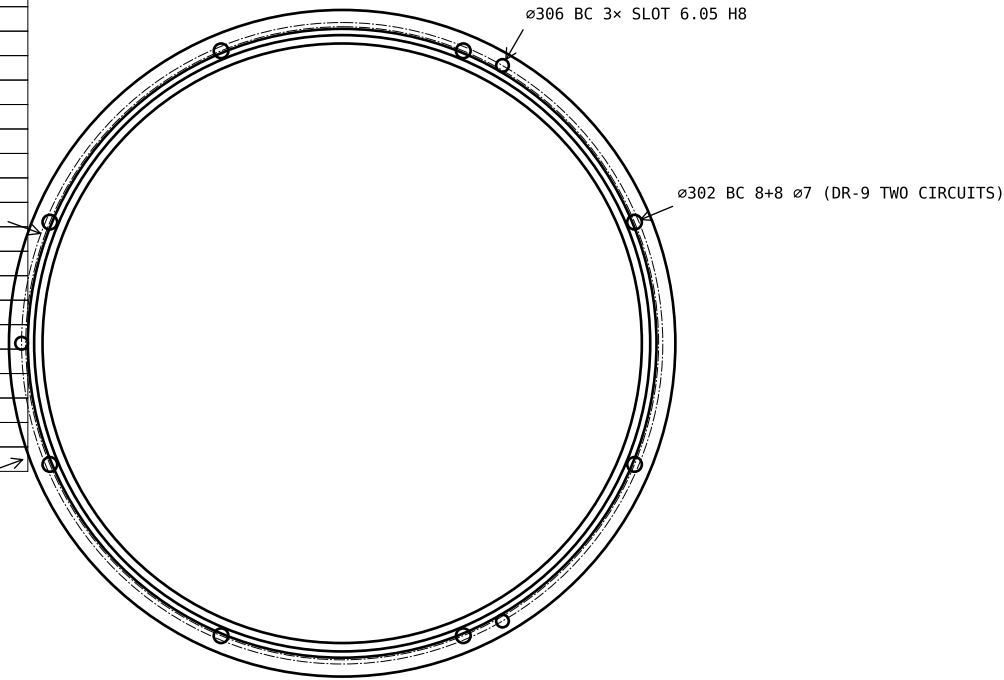

3.15 FLANGE



20.3 AS-SUPPLIED - LAP ID. 20.000 AT ASSY (DR-3)

TITLE	NUMBER	REV
CHUCK SUPPORT RING SEWCP-400 – Geometric Control (As Supplied)	SEWCP-400-001/001 (As Supplied)	A
MATERIAL	FINISH	SCALE
Al203 99.5%	AS-FIRED; LAPPED FACES PER NOTE	1:2.5 / 1:2
UNITS	DATE	ORIGIN
mm	2026-08-11	AIEF autonomous run