


NOTES:

- 1. INTERPRET PER ASME Y14.5-2018. UNITS mm. UNLESS NOTED: X.X ±0.2, X.XX ±0.05.
- 2. BREAK ALL EDGES 0.2-0.4 UNLESS NOTED. NO BURRS.
- 3. VENT ALL BLIND HOLES IN VACUUM-EXPOSED PARTS PER DR-6 (spec/00).
- 4. PROVENANCE: EVERY DIMENSION TRACES PER THE SIDECAR PROVENANCE FILE OF THIS DRAWING (AIEF).
- 5. MESA PATTERN H 0.020 ±0.003: SURFACE ARCHITECTURE – MFG PROCESS DEFINITION, NOT SOLID GEOMETRY (spec/04; deferred-feature register).
- 6. BIPOLAR BURIED ELECTRODES: CO-FIRED; SEE spec/04 ELECTRODE ARCHITECTURE – NOT DIMENSIONED HERE.
- 7. EC-D14 He DISTRIBUTION GROOVE LAYOUT: NO GEOMETRIC AUTHORITY IN spec/04 – CARRIED OPEN (drawing-stage register).
- 8. CERAMIC EDGE BREAK 0.2–0.3 × 45° ALL EDGES; NO METAL WITHIN 10 mm OF TOP SURFACE AT ASSY.

CRITICAL DIMENSIONS (frozen spec, verbatim)

|        |                                     |                 |                     |
|--------|-------------------------------------|-----------------|---------------------|
| EC-D01 | Puck outside diameter               | Ø297.0          | ±0.10               |
| EC-D02 | Puck thickness                      | 6.000           | ±0.020              |
| EC-D03 | Dielectric thickness over electrode | 0.300           | ±0.020              |
| EC-D04 | Mesa height above field             | 0.020           | ±0.003              |
| EC-D05 | Mesa diameter                       | Ø0.80           | ±0.05               |
| EC-D06 | Mesa pitch (hexagonal)              | 6.00            | ±0.10               |
| EC-D07 | Mesa plane flatness                 | –               | 0.010 TIR over Ø297 |
| EC-D08 | Seal band width                     | 3.00            | ±0.10               |
| EC-D09 | Seal band height (= mesa height)    | 0.020           | ±0.002              |
| EC-D10 | Seal band outside diameter          | Ø297.0          | ±0.10               |
| EC-D11 | Electrode outside diameter          | Ø291.0          | ±0.20               |
| EC-D12 | Electrode thickness (metallization) | 0.020           | ±0.005              |
| EC-D13 | Bipolar pole gap                    | 3.00            | ±0.20               |
| EC-D14 | He distribution groove              | 1.00 W × 0.50 D | ±0.05               |
| EC-D15 | Central He port                     | Ø1.50           | +0.10 / -0          |
| EC-D16 | Lift pin bore                       | Ø5.200          | H8                  |
| EC-D17 | Lift pin bore position              | Ø200 BC         | □ Ø0.100 □          |
| EC-D18 | Lift pin bore perpendicularity      | –               | 0.030 over 6 mm     |
| EC-D19 | Lift pin bore chamfer, both ends    | 0.3 × 45°       | ±0.15               |
| EC-D20 | HV pad diameter                     | Ø12.0           | ±0.30               |

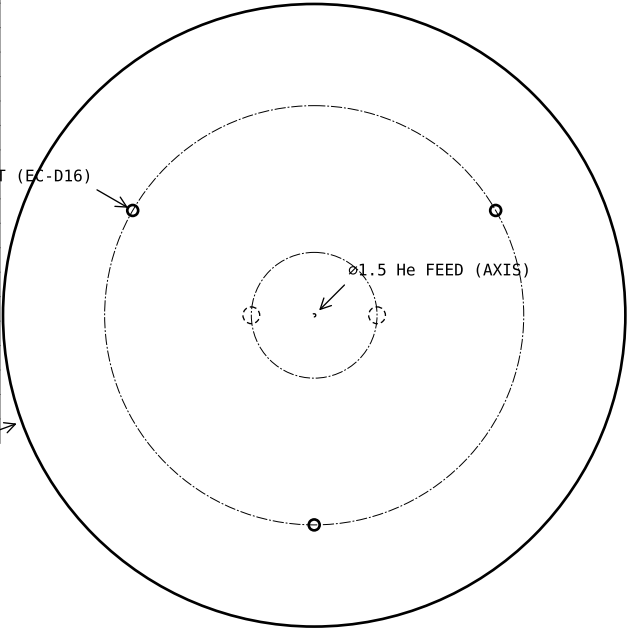

6 ±0.020 (EC-D02)

|                                      |                           |                     |
|--------------------------------------|---------------------------|---------------------|
| TITLE                                | NUMBER                    | REV                 |
| ESC PUCK SEWCP-500 – Geometry / surf | SEWCP-500-001 Sh 1        | A                   |
| MATERIAL                             | FINISH                    | SCALE               |
| Al203 99.6%                          | LAPPED TOP; SEE MESA NOTE | 1:2.5               |
| UNITS                                | DATE                      | ORIGIN              |
| mm                                   | 2026-08-11                | AIEF autonomous run |