


NOTES:

- 1. INTERPRET PER ASME Y14.5-2018. UNITS mm. UNLESS NOTED: X.X ±0.2, X.XX ±0.05.
- 2. BREAK ALL EDGES 0.2-0.4 UNLESS NOTED. NO BURRS.
- 3. VENT ALL BLIND HOLES IN VACUUM-EXPOSED PARTS PER DR-6 (spec/00).
- 4. PROVENANCE: EVERY DIMENSION TRACES PER THE SIDECAR PROVENANCE FILE OF THIS DRAWING (AIEF).
- 5. MATCHED SET OF 3, LENGTH GRADE ±0.01 WITHIN SET (spec/05 MATCHED-SET NOTE). R50 ±5 CROWN, Ra ≤ 0.2 (LP-D04/LP-D10)
- 6. CENTRELESS GRIND SHAFT; STRAIGHTNESS 0.020/95 (LP-D03).
- 7. CROWN-TO-SHAFT BLEND R1.0 MIN, NO UNDERCUT (LP-D05).
- 8. SEWCP-601 BUSHING: SEPARATE PART, ø5.60 +0.05/-0 BORE (ECR-Q-009 CORRECTED) NO CAD MODEL, SPEC-ONLY (BOM).

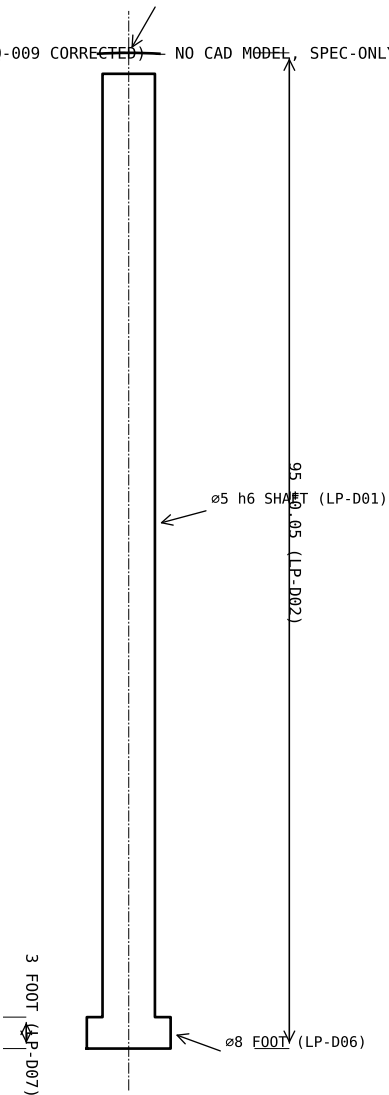

CRITICAL DIMENSIONS (frozen spec, verbatim)

LP-D01	Shaft diameter	Ø5.000	h6 (-0 / -0.008)
LP-D02	Overall length	95.00	±0.05
LP-D03	Shaft straightness	—	0.020 over 95 mm
LP-D04	Tip crown radius	R50	±5
LP-D05	Crown-to-shaft blend	R1.0 min, no undercut	+0.5 / -0
LP-D06	Foot flange diameter	Ø8.00	±0.10
LP-D07	Foot flange thickness	3.00	±0.10
LP-D08	Foot-to-shaft fillet	R1.0 min	+0.5 / -0
LP-D09	Foot seat cone angle	90°	±1°
LP-D10	Tip surface finish	Ra ≤ 0.2 µm	—
LP-D11	Shaft surface finish	Ra ≤ 0.2 µm	—
LP-D12	Length matching, set of 3	—	≤ 0.03 mm range within

TITLE	NUMBER	REV
LIFT PIN SEWCP-600 – Lift pin	SEWCP-600-DRW-001 Sh 1	A
MATERIAL	FINISH	SCALE
Al203 (shaft/crown) per spec/05 §6	SEE NOTES	1.8:1
UNITS	DATE	ORIGIN
mm	2026-08-11	AIEF autonomous run