


- NOTES:
- 1. INTERPRET PER ASME Y14.5-2018. UNITS mm. UNLESS NOTED: X.X ±0.2, X.XX ±0.05.
 - 2. BREAK ALL EDGES 0.2-0.4 UNLESS NOTED. NO BURRS.
 - 3. VENT ALL BLIND HOLES IN VACUUM-EXPOSED PARTS PER DR-6 (spec/00).
 - 4. PROVENANCE: EVERY DIMENSION TRACES PER THE SIDECAR PROVENANCE FILE OF THIS DRAWING (AIEF).
 - 5. THE LOCATOR IS THE FASTENER – NO SEPARATE SCREW (ECR-D-009). TORQUE 1.2 N·m.
 - 6. GRIND BOSS AND FLANGE (POSITIONAL BUDGET); CONCENTRICITY 0.010 TIR (AP-D09).
 - 7. ANTI-GALLING DRY FILM ON FLANGE OD AND SPIGOT THREADS; PASSIVATE.
 - 8. BOSS SHORTER THAN SLOT DEPTH BY DESIGN – DO NOT 'MATCH' TO 3.0 (spec/06 \$5 WARNING).

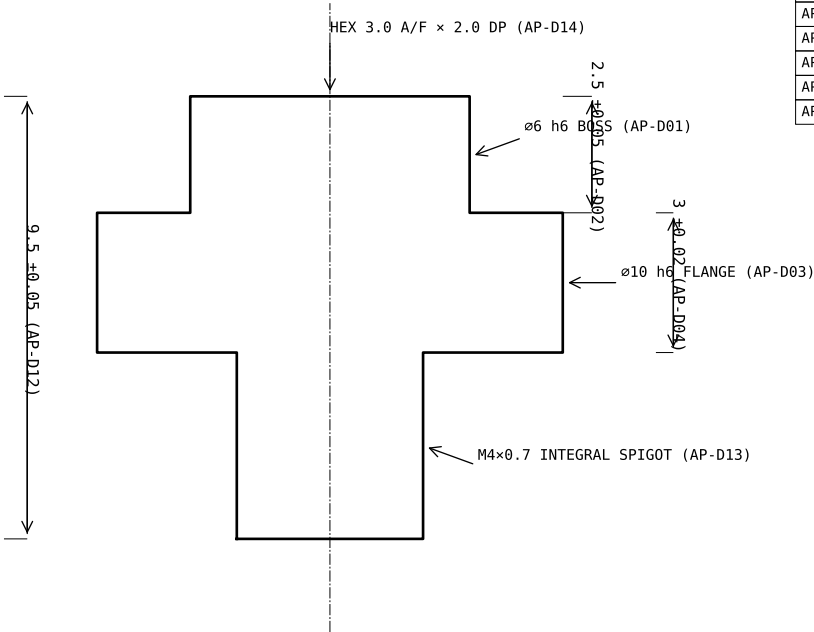

CRITICAL DIMENSIONS (frozen spec, verbatim)

AP-D01	Locating boss diameter	Ø6.000	h6 (-0 / -0.008)
AP-D02	Boss protrusion above the flange face	2.50	±0.05
AP-D03	Flange diameter	Ø10.000	h6 (-0 / -0.009)
AP-D04	Flange thickness	3.000	±0.02
AP-D05	Boss-to-flange fillet	R0.4	+0.2 / -0
AP-D06	Boss end chamfer	0.5 x 30°	±0.15
AP-D07	(struck – ECR-D-009)	–	–
AP-D08	(struck – ECR-D-009)	–	–
AP-D09	Boss-to-flange concentricity	–	0.010 TIR
AP-D10	Boss perpendicularity to the flange face	–	0.010
AP-D11	Boss surface finish	Ra ≤ 0.4 µm	–
AP-D12	Overall length, boss end to spigot end	9.50	±0.05
AP-D13	Integral retention spigot	M4 x 0.7 x 4.00 long	±0.10 on length
AP-D14	Drive socket in the boss end	3.0 A/F hex x 2.0 de	ISO 4762 key size

TITLE	NUMBER	REV
ALIGNMENT LOCATOR SEWCP-700 – Alignment	SEWCP-700-DRW-001 Sh 1	A
MATERIAL	FINISH	SCALE
Ti-6Al-4V	DRY FILM + PASSIVATE	8:1
UNITS	DATE	ORIGIN
mm	2026-08-11	AIEF autonomous run