


- NOTES:
1. INTERPRET PER ASME Y14.5-2018. UNITS mm. UNLESS NOTED: X.X ±0.2, X.XX ±0.05.
 2. BREAK ALL EDGES 0.2-0.4 UNLESS NOTED. NO BURRS.
 3. VENT ALL BLIND HOLES IN VACUUM-EXPOSED PARTS PER DR-6 (spec/00).
 4. PROVENANCE: EVERY DIMENSION TRACES PER THE SIDECAR PROVENANCE FILE OF THIS DRAWING (AIEF).
 5. O-RING GROOVE 3.2 W × 1.9 DP (VP-D07/08), CORNERS R0.3 MAX (VP-D09); FKM 22.0 ID × 2.50 CS.
 6. SEALING FACE FLAT 0.010 TIR (VP-D10).
 7. ORIFICE SEAT ø6.00 H7 × 5.0 (VP-D12) – RESTRICTOR IS SEPARATE HW (SPEC-ONLY, BOM).
 8. ORBITAL-WELD TUBE STUB; ELECTROPOLISH WETTED SURFACES.

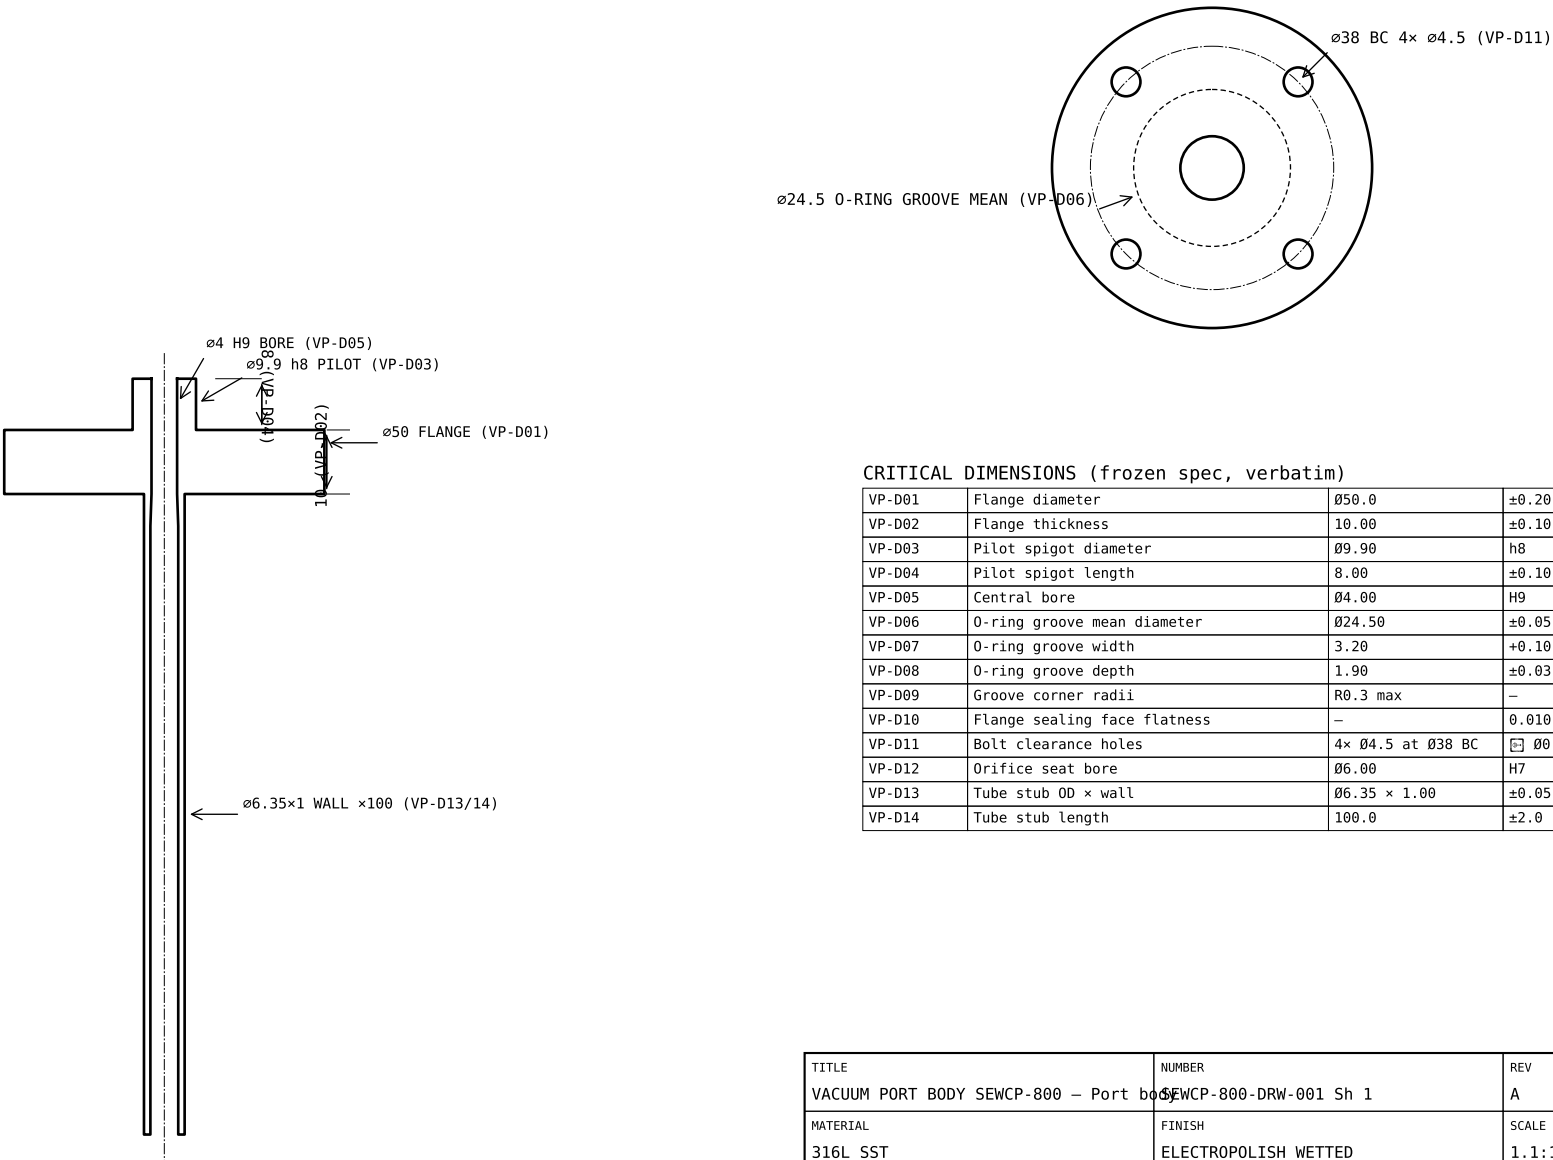

CRITICAL DIMENSIONS (frozen spec, verbatim)			
VP-D01	Flange diameter	Ø50.0	±0.20
VP-D02	Flange thickness	10.00	±0.10
VP-D03	Pilot spigot diameter	Ø9.90	h8
VP-D04	Pilot spigot length	8.00	±0.10
VP-D05	Central bore	Ø4.00	H9
VP-D06	O-ring groove mean diameter	Ø24.50	±0.05
VP-D07	O-ring groove width	3.20	+0.10 / -0
VP-D08	O-ring groove depth	1.90	±0.03
VP-D09	Groove corner radii	R0.3 max	—
VP-D10	Flange sealing face flatness	—	0.010 TIR
VP-D11	Bolt clearance holes	4x Ø4.5 at Ø38 BC	Ø0.30
VP-D12	Orifice seat bore	Ø6.00	H7
VP-D13	Tube stub OD x wall	Ø6.35 x 1.00	±0.05
VP-D14	Tube stub length	100.0	±2.0

TITLE	NUMBER	REV
VACUUM PORT BODY SEWCP-800 – Port body	SEWCP-800-DRW-001 Sh 1	A
MATERIAL	FINISH	SCALE
316L SST	ELECTROPOLISH WETTED	1.1:1
UNITS	DATE	ORIGIN
mm	2026-08-11	AIEF autonomous run