


- NOTES:
- 1. INTERPRET PER ASME Y14.5-2018. UNITS mm. UNLESS NOTED: X.X ±0.2, X.XX ±0.05.
 - 2. BREAK ALL EDGES 0.2-0.4 UNLESS NOTED. NO BURRS.
 - 3. VENT ALL BLIND HOLES IN VACUUM-EXPOSED PARTS PER DR-6 (spec/00).
 - 4. PROVENANCE: EVERY DIMENSION TRACES PER THE SIDECAR PROVENANCE FILE OF THIS DRAWING (AIEF).
 - 5. PLATE-HUNG HANGER PER ECR-Q-012 DISPOSITION (DEC-02 + ADDENDUM, APR-031/032): MOUNTS TO THE RF-HOT COOLING PLATE – NOT TO GROUND (RF-IF-3).
 - 6. BEARS ON THE STRAP TOP FACE AT 8.25: RS-D04 MID-PLANE = 8.0 EXACTLY (SB-D01).
 - 7. ALL SURFACES ≥ 8.0 FROM THE GROUNDED BASE PLATE (SB-D04) – MINIMUM AT THE CHEEK TIPS.
 - 8. M6 × 16 SHCS, 6.0 N·m INTO THE CP BRACKET TAPS (r=150, 88°/122°); GRIP 5.0, ENGAGEMENT 11.
 - 9. CNC ONE PIECE FROM 6061-T6 12.7 PLATE; ALODINE 1200 (CONDUCTIVE) – NOT ANODIZE.

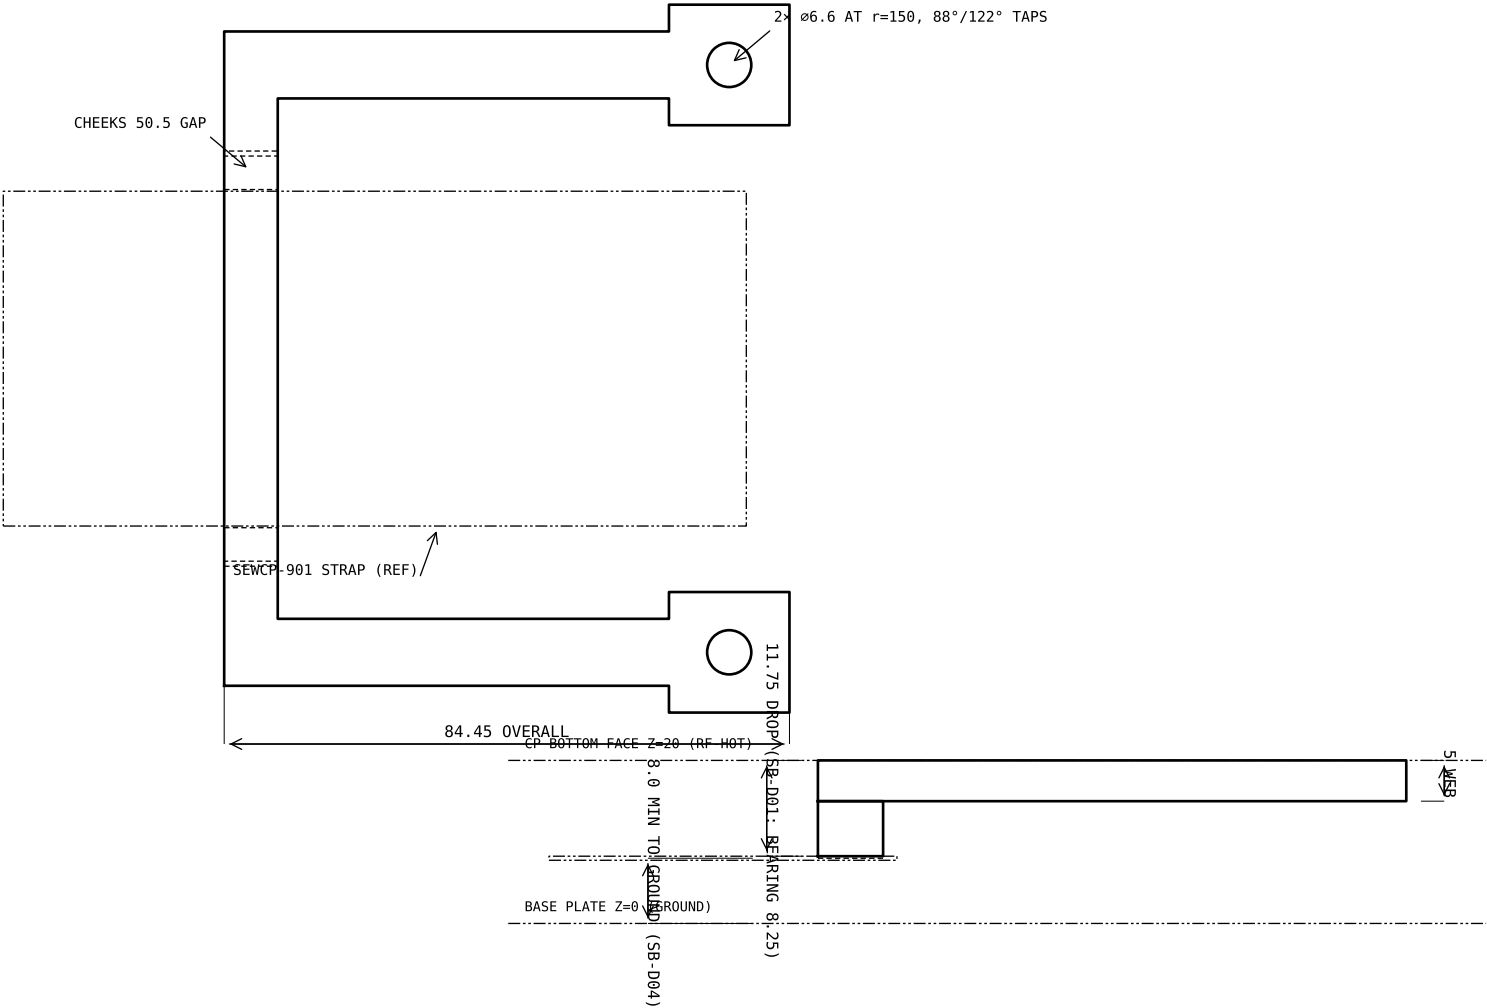

TITLE	NUMBER	REV
STRAP SUPPORT HANGER SEWCP-902 – Strap Support Hanger	SEWCP-902-DR-001 Sh 1	B
MATERIAL	FINISH	SCALE
6061-T6	ALODINE 1200	1.15:1 / 1.6:1
UNITS	DATE	ORIGIN
mm	2026-08-11	AIEF autonomous run