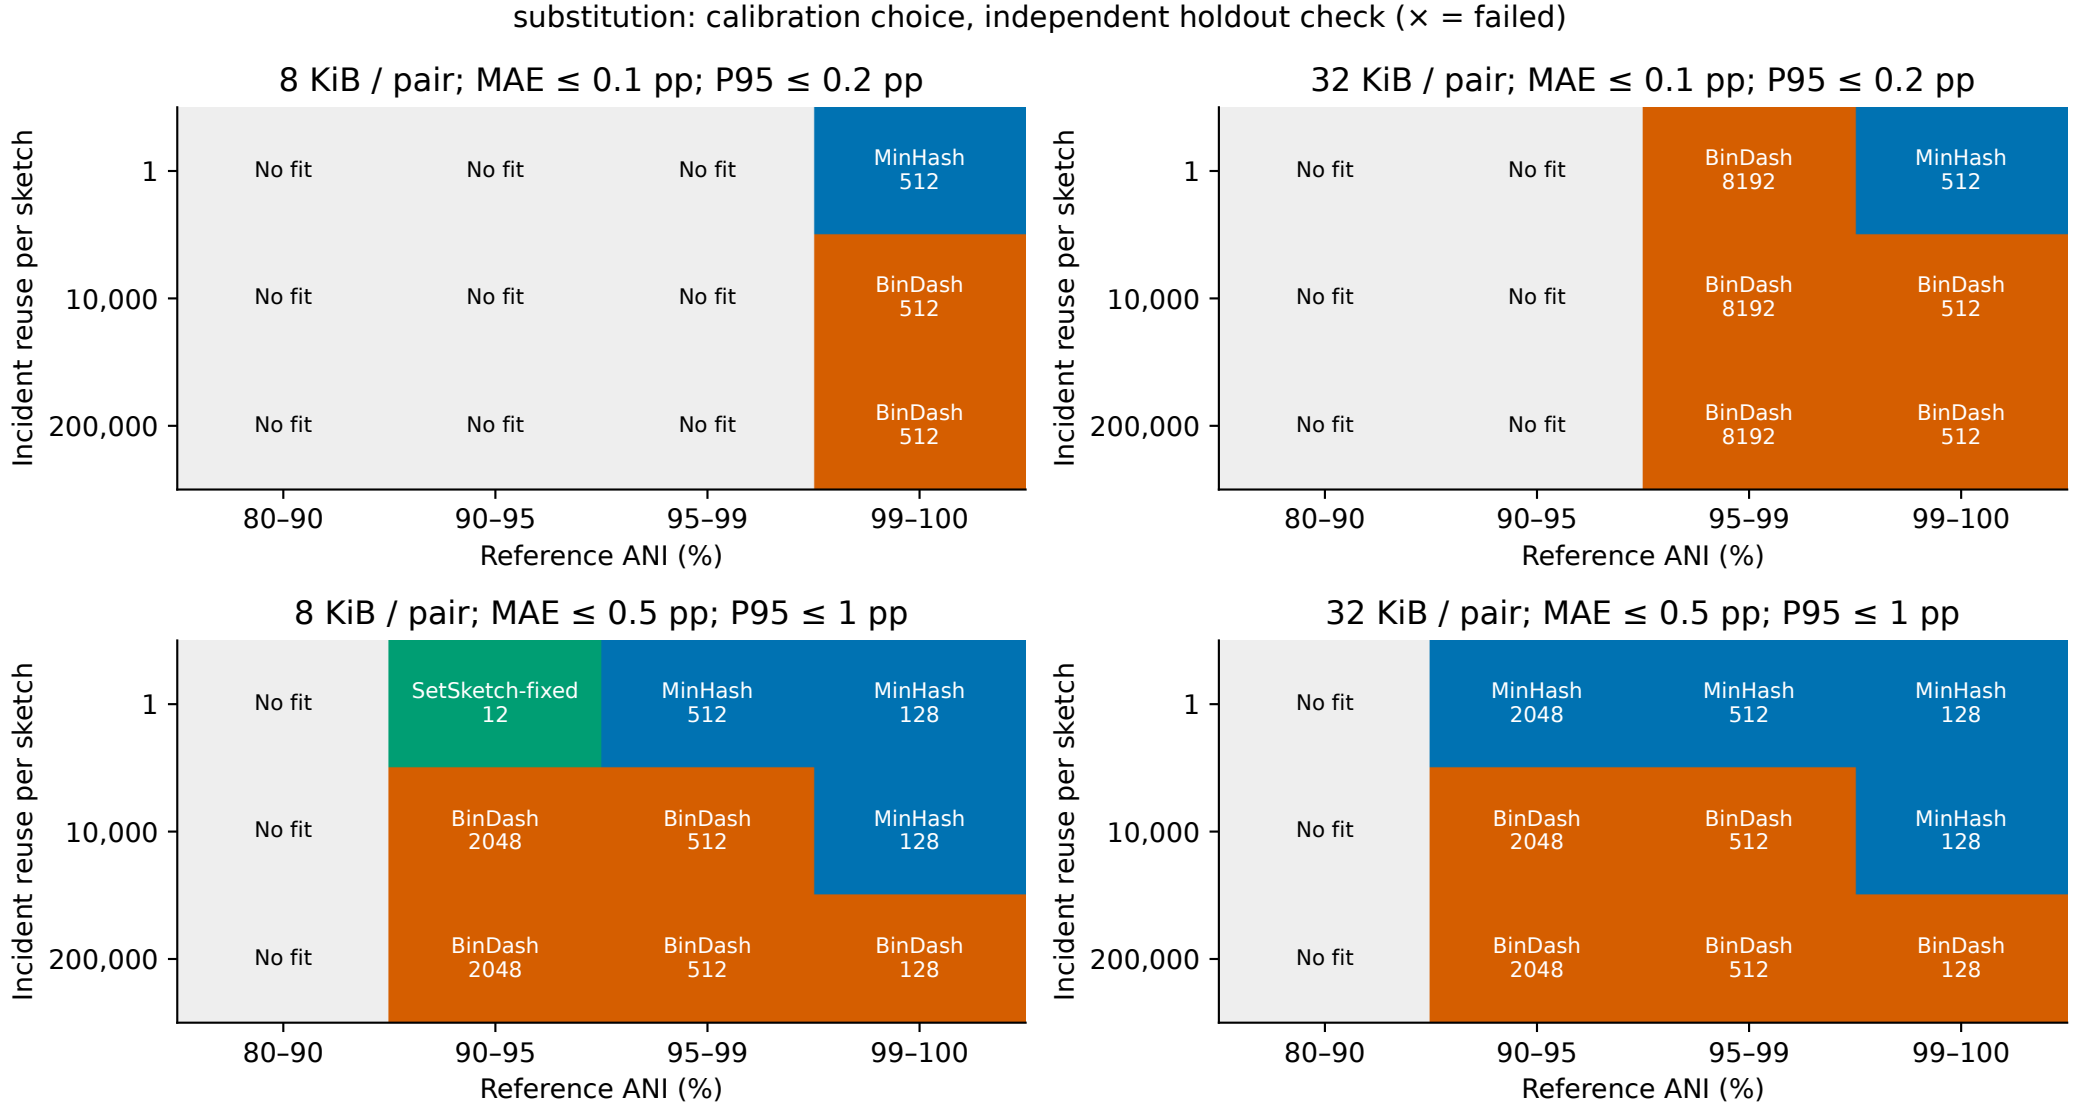
substitution: calibration choice, independent holdout check (× = failed)
8 KiB / pair; MAE ≤ 0.1 pp; P95 ≤ 0.2 pp
32 KiB / pair; MAE ≤ 0.1 pp; P95 ≤ 0.2 pp
8 KiB / pair; MAE ≤ 0.5 pp; P95 ≤ 1 pp
32 KiB / pair; MAE ≤ 0.5 pp; P95 ≤ 1 pp
Incident reuse per sketch
1
10,000
200,000
No fit
MinHash 512
BinDash 512
BinDash 8192
MinHash 2048
MinHash 128
SetSketch-fixed 12
BinDash 2048
80–90
90–95
95–99
99–100
Reference ANI (%)