

THE CHEMICAL FACTORY

— Built to Dominate —

Chem Swell pro

Use hydrophilic polymer waterstop to seal building joints, concrete structures, and important waterproofing applications.



FAST
SWELLING



EXCELENT
WATER SEALING



CHEMICAL
RESISTANCE



EASY
APPLICATION



DESCRIPTION

Chem Swell Pro is a new generation of high-performance acrylic polymer-based expanding tape. It grows up to 900% when exposed to water. When completely dry, Chem Swell Pro shrinks to its original installation size and expands again when wet. Chem Swell Pro is used in concrete construction to seal construction joints such as wall-to-base connections, pipe entry systems, and interface sections between old and new concrete. Chem Swell Pro can be readily stored in its original moisture-proof packaging in cool, dry circumstances away from direct sunlight.

- ✓ Hydrophilic, re-swellable polymer waterstop for construction joints.
- ✓ Expands approximately 750–800% by volume on contact with water.
- ✓ Polymer structure designed to resist micro-bacterial attack.
- ✓ Suitable for water-retaining structures and underground construction applications.
- ✓ Capable of repeated swelling and shrinking during wet/dry cycles.



RECOMMENDE USES

- Sewerage treatment.
- Water tanks and reservoirs.
- Waste water treatment structure.
- Structure / Concrete pipes
- Swimming pools.



SERVICES



Admixtures



Surface Treatment



Concrete Repair



Water Proofings



Industrial Flooring System



Grouts & Anchors



Adhesives



Joint Sealants



Bitumin Products



Miscellaneous



STRONG
WATERPROOFING



FAST & EFFECTIVE
INJECTION



LONG LASTING
PROTECTION



Office #1, building 99-c, jami commercial
street no 11, phase 7, DHA Karachi.



+92 21 35885870



www.thechemicalfactory.com



info@dechemicalfactory.com



TECHNICAL DATA

Property	Value
Product Type	Hydrophilic polymer waterstop / re-swellable joint sealing profile
Density	Approx. 1.40 g/cm ³
Colour	Red
Swelling Retardation	Yes
Shore	50
Application Temperature	10 °C / 50 °C
Elongation	Approx. 500–780%
Hydrostatic Pressure	Approx. >50 m (5 bar)
Graph Title	Swelling / Recovery
Packaging	5*20 mm , 10*20 mm
Profile Types	Rectangle and box profile

* The hardness value is reproduced from the supplied reference as stated. The reference identifies the value as approximately 3.8 (Shore A type); confirm the approved QC specification before issuing this figure as a certified laboratory value.



APPLICATION GUIDELINES



DISPENSING

Chem Swell Pro (also called a hydrophilic waterstop or swellow bar) is a pre-formed rubber or polymer strip used in construction to seal concrete joints and stop water leaks.



MIXING

To use waterproof cement or mortar correctly, you must clean and dampen the surface, mix the product with the precise amount of water or additive, and apply at least two thin, alternating coats.



USES

Waterproofing Membrane on exposed flat and pitched roofs both for new construction and refurbishment of old roofs.



APPLICATION

To seal precast concrete elements, the given reference suggests creating a notch or recess where necessary. Choose a profile size so that the assembled elements create adequate compression /pre-stress at the joint. To fix the junction, use an appropriate mounting cement or permanently elastic sealant.




STORAGE & HANDLING

Chem Swell Pro in its original box somewhere cool, protected, and dry. Keep the product away from direct sunlight, extreme temperatures, heat sources, and excess humidity. In tropical climates, air-conditioning is recommended for storage. High temperatures and humidity can cause degradation and shorten shelf life.



SAFETY

As with any construction chemicals, caution should always be used with caution. Gloves and goggles are examples of protective apparel that should be worn. Any splashes to the skin or eyes should be treated right away with fresh water, and you should consult a doctor. If any of the product is inadvertently eaten, contact for medical help right away rather than inducing vomiting.

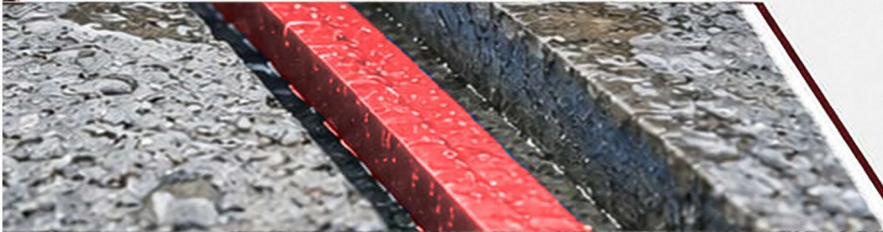

ENHANCED
DURABILITY



FASTER
PLACEMENT



BETTER FINISH
& PERFORMANCE

The information above reflects The Chemical Factory's current knowledge and is provided to assist specifiers and contractors. It does not replace project-specific trials to confirm suitability. Data are typical values under standard conditions; on-site results may vary. Recommendations are offered in good faith without warranty, as factors beyond our control can affect performance. The Chemical Factory may revise specifications without prior notice. Users are responsible for compliance with applicable standards and regulations. Technical assistance is available on request.



Office #1, building 99-c, jami commercial
street no 11, phase 7, DHA Karachi.



+92 21 35885870



www.thechemicalfactory.com



info@dechemicalfactory.com



CONSUMPTION

Coverage:

A swell bar, also known as a hydrophilic waterstop, usually goes along the whole length of a concrete joint and comes in rolls that are 5 to 40 meters long.

Guidance:

A hydrophilic swell bar is a flexible waterstop strip used in construction joints to block water leaks by expanding when wet.



STANDARDS

- Solid Content: ~100%
- Hardness: Approx. 4 Shore A
- Density: Approx. 2.0 g/cm³



IMPORTANT INFORMATION

Supplied in: 5*20 mm , 10*20 mm

Storage: Storage Condition Cool, covered and dry place; protect from direct sunlight and heat

Self Life: Shelf Life: 24 months in unopened original packaging, stored as suggested.

Hazard Class: Non-hazardous goods.