
THE CHEMICAL FACTORY

Built to Dominate

Chem 2k Inject Pro

Advanced Polyurethane Injection Resin for Active Leak Sealing & Waterproofing

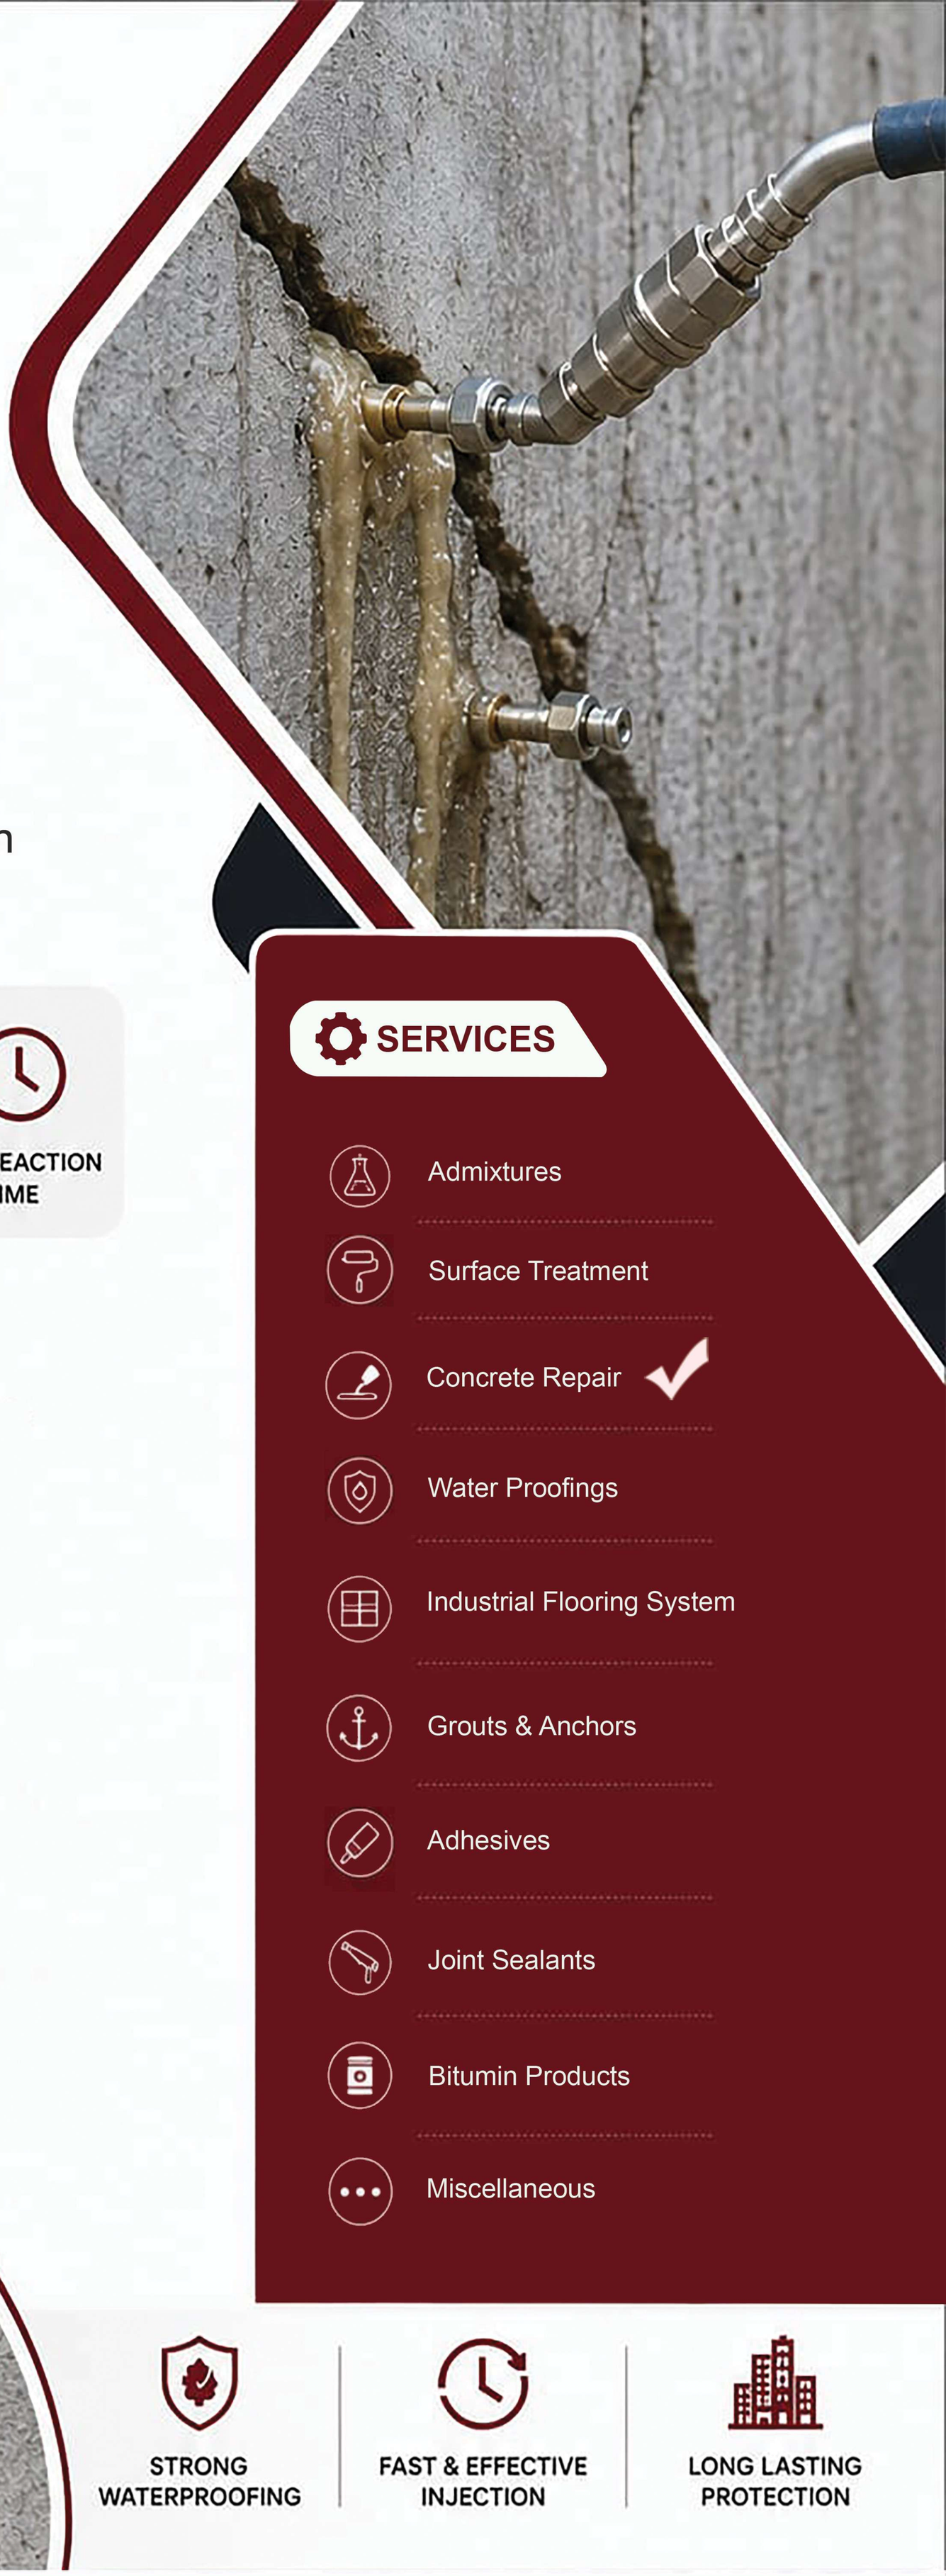

- ACTIVE LEAK SEALING
- HIGH PENETRATION
- FLEXIBLE & DURABLE
- FAST REACTION TIME

DESCRIPTION

Chem 2k Inject Pro effectively stops active leaks and provides permanent, elastic sealing of cracks and construction joints. It is suitable for injection into both dry and wet cracks and can also fill voids.

- Stop active water leaks intantly.
- Excellent penetration into fine cracks and voids.
- Forms a flexible and durable waterproof barrier.
- Resistant to hydrostatic pressure.
- Suitable for underground and below grade structures.

RECOMMENDE USES

- Basements and underground structures
- Tunnels and retaining walls
- Water tanks and reservoirs
- Lift pits and elevator shafts
- Construction joints and cold joints



SERVICES

- Admixtures
- Surface Treatment
- Concrete Repair
- Water Proofings
- Industrial Flooring System
- Grouts & Anchors
- Adhesives
- Joint Sealants
- Bitumin Products
- Miscellaneous

- STRONG WATERPROOFING
- FAST & EFFECTIVE INJECTION
- LONG LASTING PROTECTION

Office #1, building 99-c, jami commercial street no 11, phase 7, DHA Karachi.

+92 21 35885870

www.thechemicalfactory.com

info@dechemicalfactory.com

TECHNICAL DATA

Property	Value
Mixing viscosity at 77 °F ASTM D-115-72 ISO 2555	approx. 250 cp approx. 250 mPa.s
Volume increase at water contact	max. 1 : 20
Density of the mixture at 68 °F DIN 53479	approx. 9.18 lb/gal
Spec. density of the cured foam ASTM D 1622	approx. 0.05-0.1 g/cm3
Starting time at water contact	approx. 50 sec
Expansion time	approx. 3 min
Pot life (68 °F, 1 kg of mixture) DIN EN 1504-5	45 min
Reaction time without water contact (at 68 °F)	approx. 24 h
Non-sticky after	approx. 6 min
Mixing ratio (by weight)	1 : 1 (A : B)
Mixing ratio (by volume)	1.2 : 1 (A : B)
Packaging	10 + 10 kg Can

* only one product is needed on the jobsite, which provides for easier calculation of required resin quantities

CONSUMPTION

Coverage: Approx. 0.1 gallon / gallon void (foam)
Approx. 1 gallon / gallon void (solid resin)

Guidence: 2k Injection is injected until the glue comes out as foam from the next drill hole or the crack's surface.

STANDARDS

- Tested in accordance with DIN 1048 Water Permeability Test.
- Complies with Water Research Council requirements for potable water contact.

IMPORTANT INFORMATION

Supplied in: 20 liter 50% A & 50% B.

Storage: Store dry, frost-free, out of direct sunlight

Self Life: 6 months in original packaging

Hazard Class: Non-hazardous goods.
Consult MSDS for details.

APPLICATION GUIDELINES

DISPENSING

Chem 2k inject pro to the concrete mix at recommended dosage. For best result, introduce the the admixture into the mixing water or into freshly mixed concrete to ensure uniform dispersion. Do not add directly to dry cement.

MIXING

It is suggested that the A and B parts be mixed at +59 °F using an electrical mixer that spins slowly and ideally has a 2k inject pro Resin Stirrer attached.

USES

2k inject pro stops active leaks and seals cracksand construction joints permanently and elastically. Itcan be injected in dry and wet cracks. The material can also be used for filling of voids.

APPLICATION

Within ten to fifteen minutes of the first injection, administer 2k inject pro as a follow-up. The subsequent injection must be performed during the first injected material's pot life. Inject in two phases to fill big, moist spaces. A minimum of one hour must pass between the first and second injections.

STORAGE & HANDLING

Store in original, tightly closed containers in a cool, dry place. Keep away from heat, sparks and direct Sunlight.

SAFETY

Wear protecting gloves and goggles when processing the material. When carring out injection work, make sure to protect the surrounding work area from injection resin that may be disharge from the wall, packers, drill holes, etc. Do not stand directly behind the packers during injection.



ENHANCED DURABILITY

FASTER PLACEMENT

BETTER FINISH & PERFORMANCE

The information above reflects The Chemical Factory's current knowledge and is provided to assist specifiers and contractors. It does not replace project-specific trials to confirm suitability. Data are typical values under standard conditions; on-site results may vary. Recommendations are offered in good faith without warranty, as factors beyond our control can affect performance. The Chemical Factory may revise specifications without prior notice. Users are responsible for compliance with applicable standards and regulations. Technical assistance is available on request.



Office #1, building 99-c, jami commercial street no 11, phase 7, DHA Karachi.

+92 21 35885870

www.thechemicalfactory.com

info@ dechemicalfactory.com