
THE CHEMICAL FACTORY

Built to Dominate

Chem PU Elasto

Pure polyurethane, liquid-applied roof waterproofing membrane, quick cure, and minimal odour

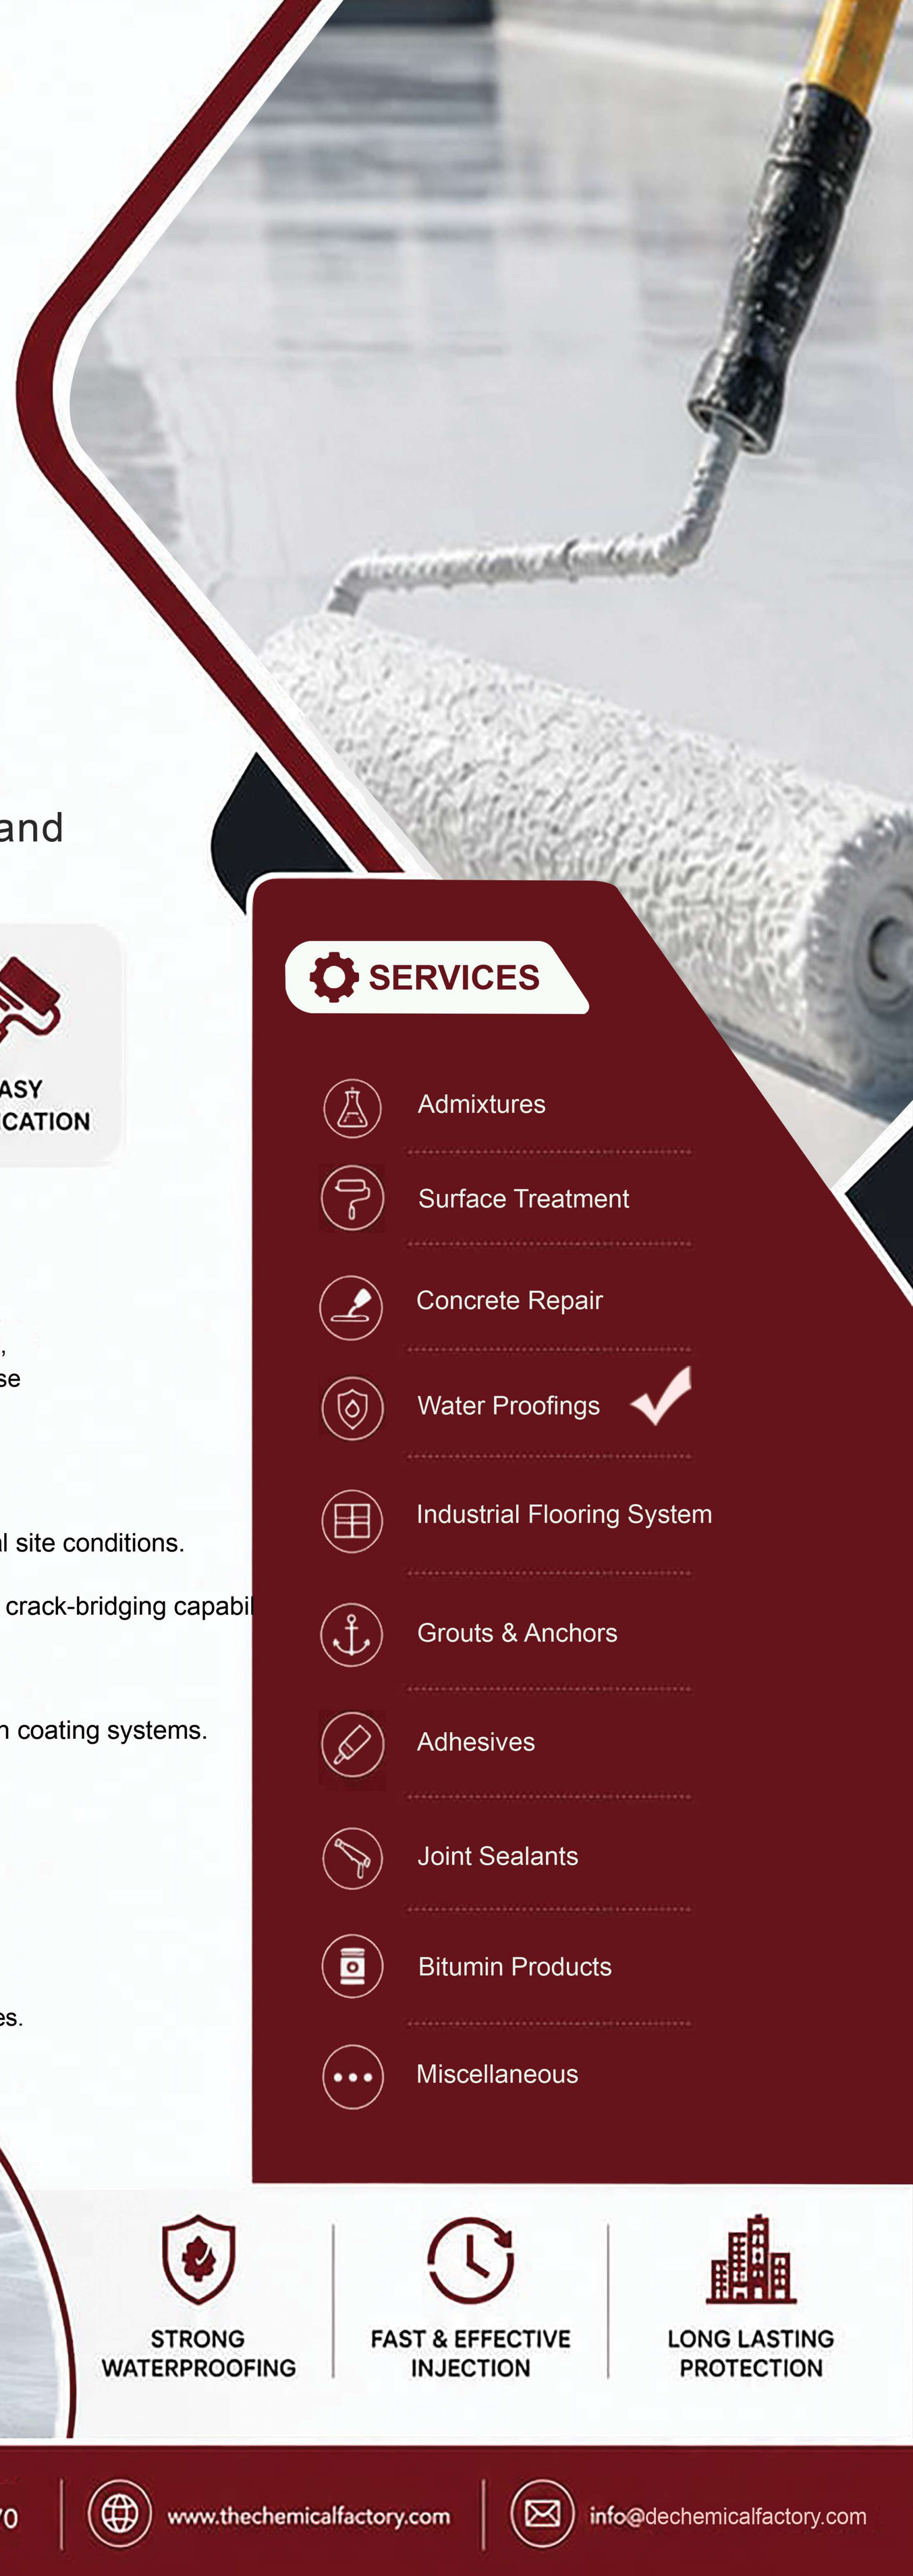

FAST DRYING | EXCELLENT ADHESION | CORROSION RESISTANT | EASY APPLICATION

DESCRIPTION

CHEM PU ELASTO PRO is a rapid cure, one component, cold applied, moisture-triggered aliphatic-aromatic pure pilyurethane membrane base on unique i-Cure Technology.

- Cold-applied application by brush or roller; suitable for practical site conditions.
- Forms a seamless, elastic waterproofing membrane with good crack-bridging capabil
- High-solids formulation for efficient membrane build-up.
- Low-odour formulation compared with conventional solvent-rich coating systems.
- Suitable for horizontal and vertical waterproofing surfaces.

RECOMMENDE USES

- Exposed and non-exposed flat roof waterproofing.
- Pitched roof and roof-deck waterproofing.
- Protective waterproofing layer beneath compatible subsequent finishes.
- Waterproofing of concrete and cementitious substrates.
- Concrete surface before coating.



SERVICES

- Admixtures
- Surface Treatment
- Concrete Repair
- Water Proofings
- Industrial Flooring System
- Grouts & Anchors
- Adhesives
- Joint Sealants
- Bitumin Products
- Miscellaneous

STRONG WATERPROOFING | FAST & EFFECTIVE INJECTION | LONG LASTING PROTECTION

Office #1, building 99-c, jami commercial street no 11, phase 7, DHA Karachi.

+92 21 35885870

www.thechemicalfactory.com

info@dechemicalfactory.com

TECHNICAL DATA

Property	Value
Property	Value
Chemical Base	Chemical Base One-component moisture-curing polyurethane
Form	Thixotropic liquid
Typical Appearance	Smooth coating; standard colour as supplied
Density	Approx. 1.35 kg/L
Solids Content	Approx. 95% by weight
Flash Point	Flash Point Approx. 80 °C (closed-cup method)
Crack Bridging	Up to 2 mm, no cracking reported (ASTM C836)
Elongation at Break	Approx. 600% (ASTM D412)
Tear Strength	Approx. 14.5 N/mm (ASTM D624)
Tensile Strength	Approx. 4 N/mm² (ASTM D412)
Pull-Off Adhesion	< 1.5 N/mm² (ASTM D4541)
VOC	< 250 g/L (ASTM D2369)

* Performance varies with substrate, film build, temperature and application method.

CONSUMPTION

Coverage: Approximately 1.5–2.0 kg/m² per mm of thickness, depending on surface condition, porosity and application method.

Guidence: Clean all tools and application equipments with Thinner C immediately after use. Hardened and/or cured material can only be removed mechanically.

STANDARDS

- Solid Content: ~95% by weight (+23°C/50%r.h.
- Flash Point: 80 °C (Closed cup method)
- ~1.35 kg/L

IMPORTANT INFORMATION

Supplied in: 20 Kg Bucket

Storage: Store dry, frost-free, out of direct sunlight

Self Life: 1 years in original packaging

Hazard Class: Non-hazardous goods.

APPLICATION GUIDELINES

DISPENSING

Chem Pu Elasto is a high-performance polyurethane-based material designed for waterproofing, sealing, and protection of concrete and construction surfaces. It provides excellent adhesion, flexibility, and resistance to water penetration, making it suitable for roofs, terraces, concrete structures, joints, and other areas exposed to moisture.

MIXING

Adheres to various subatance including concrete, cementitious substrates and bitumen sheets.

USES

Waterproofing Membrane on exposed flat and pitched roofs both for new construction and refurbish-ment of old roofs.

APPLICATION

Prior the application of Chem PU Elasto the priming coat if used must cured tack-free.
For the waiting time / overcoating please refer to areas (handrails, etc) have to be protected with tape or plastic wrapping.

STORAGE & HANDLING

Store in a cool, dry and well-ventilated area, away from direct sunlight and heat sources.
Keep the product in its original, tightly closed container until ready for use.

SAFETY

Use appropriate personal protective equipment and provide adequate ventilation during application. Avoid unnecessary skin and eye contact. Do not eat, drink or smoke while handling the product. Refer to the product Safety Data Sheet (SDS) for detailed hazard, first-aid, handling, spill and disposal information.



ENHANCED DURABILITY

FASTER PLACEMENT

BETTER FINISH & PERFORMANCE

The information above reflects The Chemical Factory's current knowledge and is provided to assist specifiers and contractors.
It does not replace project-specific trials to confirm suitability. Data are typical values under standard conditions; on-site results may vary.
Recommendations are offered in good faith without warranty, as factors beyond our control can affect performance. The Chemical Factory may revise specifications without prior notice. Users are responsible for compliance with applicable standards and regulations.
Technical assistance is available on request.



Office #1, building 99-c, jami commercial street no 11, phase 7, DHA Karachi.

+92 21 35885870

www.thechemicalfactory.com

info@ dechemicalfactory.com