
THE CHEMICAL FACTORY

*Built to Dominate*

# Chem Styro Bond

Styrene-Butadiene Rubber (SBR) Latex
Bonding & Cement Modification

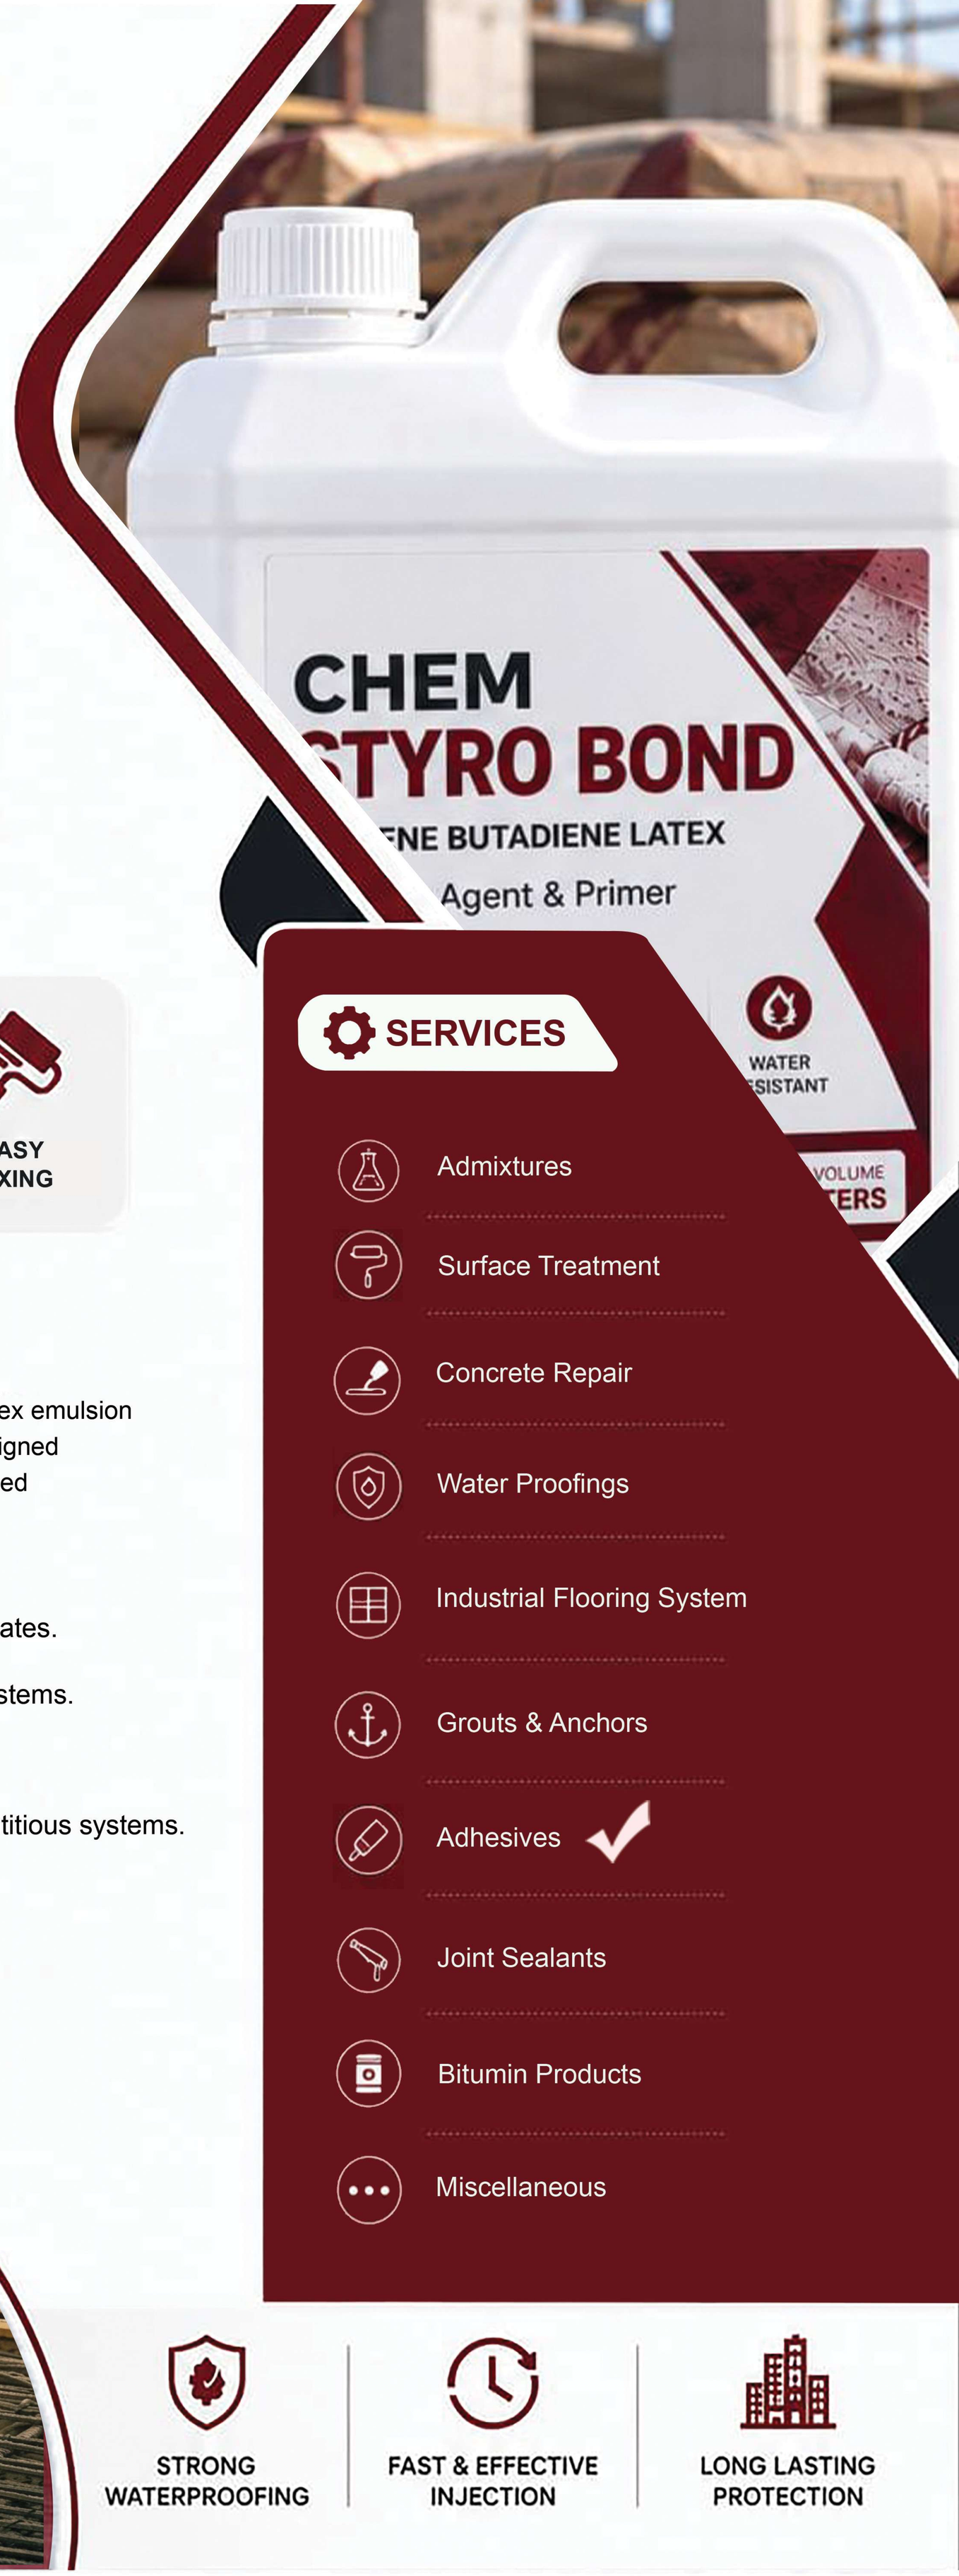


FAST BONDING | STRONG ADHESION | WATER RESISTANCE | EASY MIXING

## DESCRIPTION

CHEM STYRO BOND is a white Styrene-Butadiene Rubber (SBR) latex emulsion formulated for use with cement-based construction materials. It is designed to modify cement renders, screeds and mortars and to provide improved bonding and performance in repair, waterproofing and other cementitious applications.

- Improves adhesion of cementitious materials to suitable substrates.
- Enhances flexural strength and flexibility of modified mortar systems.
- Improves tensile strength of cement-based mixes.
- Reduces water permeability in appropriately formulated cementitious systems.
- Non-corrosive to steel.

## RECOMMENDE USES

- High-strength floor screeds.
- Patching and repair mortars.
- Thin-section screeds.
- Waterproofing of cementitious surfaces.
- Bonding slurry / bonding coat for renders and waterproofing systems.



## SERVICES

- Admixtures
- Surface Treatment
- Concrete Repair
- Water Proofings
- Industrial Flooring System
- Grouts & Anchors
- Adhesives ✓
- Joint Sealants
- Bitumin Products
- Miscellaneous

STRONG WATERPROOFING | FAST & EFFECTIVE INJECTION | LONG LASTING PROTECTION

Office #1, building 99-c, jami commercial street no 11, phase 7, DHA Karachi.
+92 21 35885870
www.thechemicalfactory.com
info@dechemicalfactory.com

## TECHNICAL DATA

| Property | Value |
|---|---|
| Product Type | Styrene-Butadiene Rubber (SBR) latex emulsion |
| Appearance / Form | Liquid |
| Colour | White |
| Solids Content | 50% ± 1% |
| Density | Approx. 1.01 kg/L |
| Minimum Application Temperature | +5 °C |
| Flexural Strength | Approx. 20–30% improvement compared with unmodified mortar |
| Tensile Strength | Approx. 20–30% improvement |
| Abrasion Resistance | Up to 2005* |
| Bonding Grout | 4M/L* |

The abrasion-resistance and bonding-grout figures are reproduced from the supplied reference image; the source presentation does not clearly identify the associated test method/units. They should therefore be confirmed against the approved CHEM SBR laboratory specification before controlled publication.

## CONSUMPTION

**Coverage:** 1 to 1.5 square meters per liter for a standard 1 mm to 2 mm slurry coat or bonding slurry

**Guidence:** The most widely used general-purpose synthetic elastomer, composed typically of 75% butadiene and 25% styrene.

## STANDARDS

- Solid Content: 50% ± 1%
- Hardness: Approx. 4 Shore A
- Density: Approx. 1.01 kg/L

## IMPORTANT INFORMATION

**Supplied in:** Bucket

**Storage:** Storage Condition Cool, covered and dry place; protect from direct sunlight and heat

**Self Life:** 6 Months

**Hazard Class:** Non-hazardous goods.

## APPLICATION GUIDELINES

### DISPENSING

Styrene-butadiene rubber (SBR) dispensing is the application or metering of liquid SBR latex or SBR-based adhesives, sealants, and modified cement binders in manufacturing and building operations.

### MIXING

CHEM STYRO BOND should be incorporated into cementitious mixes according to the approved formulation for the intended application. It should not be used as a standalone bonding grout without cement.

### USES

Apply The SBR/Cement bonding grout to the prepared substrate. Do not allow the bonding coat to dry before subsequent layers.

### APPLICATION

Styrene-Butadiene Rubber (SBR) is a versatile synthetic elastomer that is widely used in automotive, construction, and industrial manufacture because of its good abrasion resistance, high tensile strength, and low cost.

### STORAGE & HANDLING

Chem Styro Bond in its original sealed container. Protect from extreme temperatures, contamination and adverse weather exposure.

### SAFETY

Avoid unnecessary skin/eye contact. Provide ventilation where required and refer to the current SDS for detailed safety information.



ENHANCED DURABILITY

FASTER PLACEMENT

BETTER FINISH & PERFORMANCE

The information above reflects The Chemical Factory's current knowledge and is provided to assist specifiers and contractors. It does not replace project-specific trials to confirm suitability. Data are typical values under standard conditions; on-site results may vary. Recommendations are offered in good faith without warranty, as factors beyond our control can affect performance. The Chemical Factory may revise specifications without prior notice. Users are responsible for compliance with applicable standards and regulations. Technical assistance is available on request.



Office #1, building 99-c, jami commercial street no 11, phase 7, DHA Karachi.

+92 21 35885870

www.thechemicalfactory.com

info@dechemicalfactory.com