
THE CHEMICAL FACTORY

Built to Dominate

Chem 1k Inject

Single Component, Hydrophobic Polyurethane Injection Grout

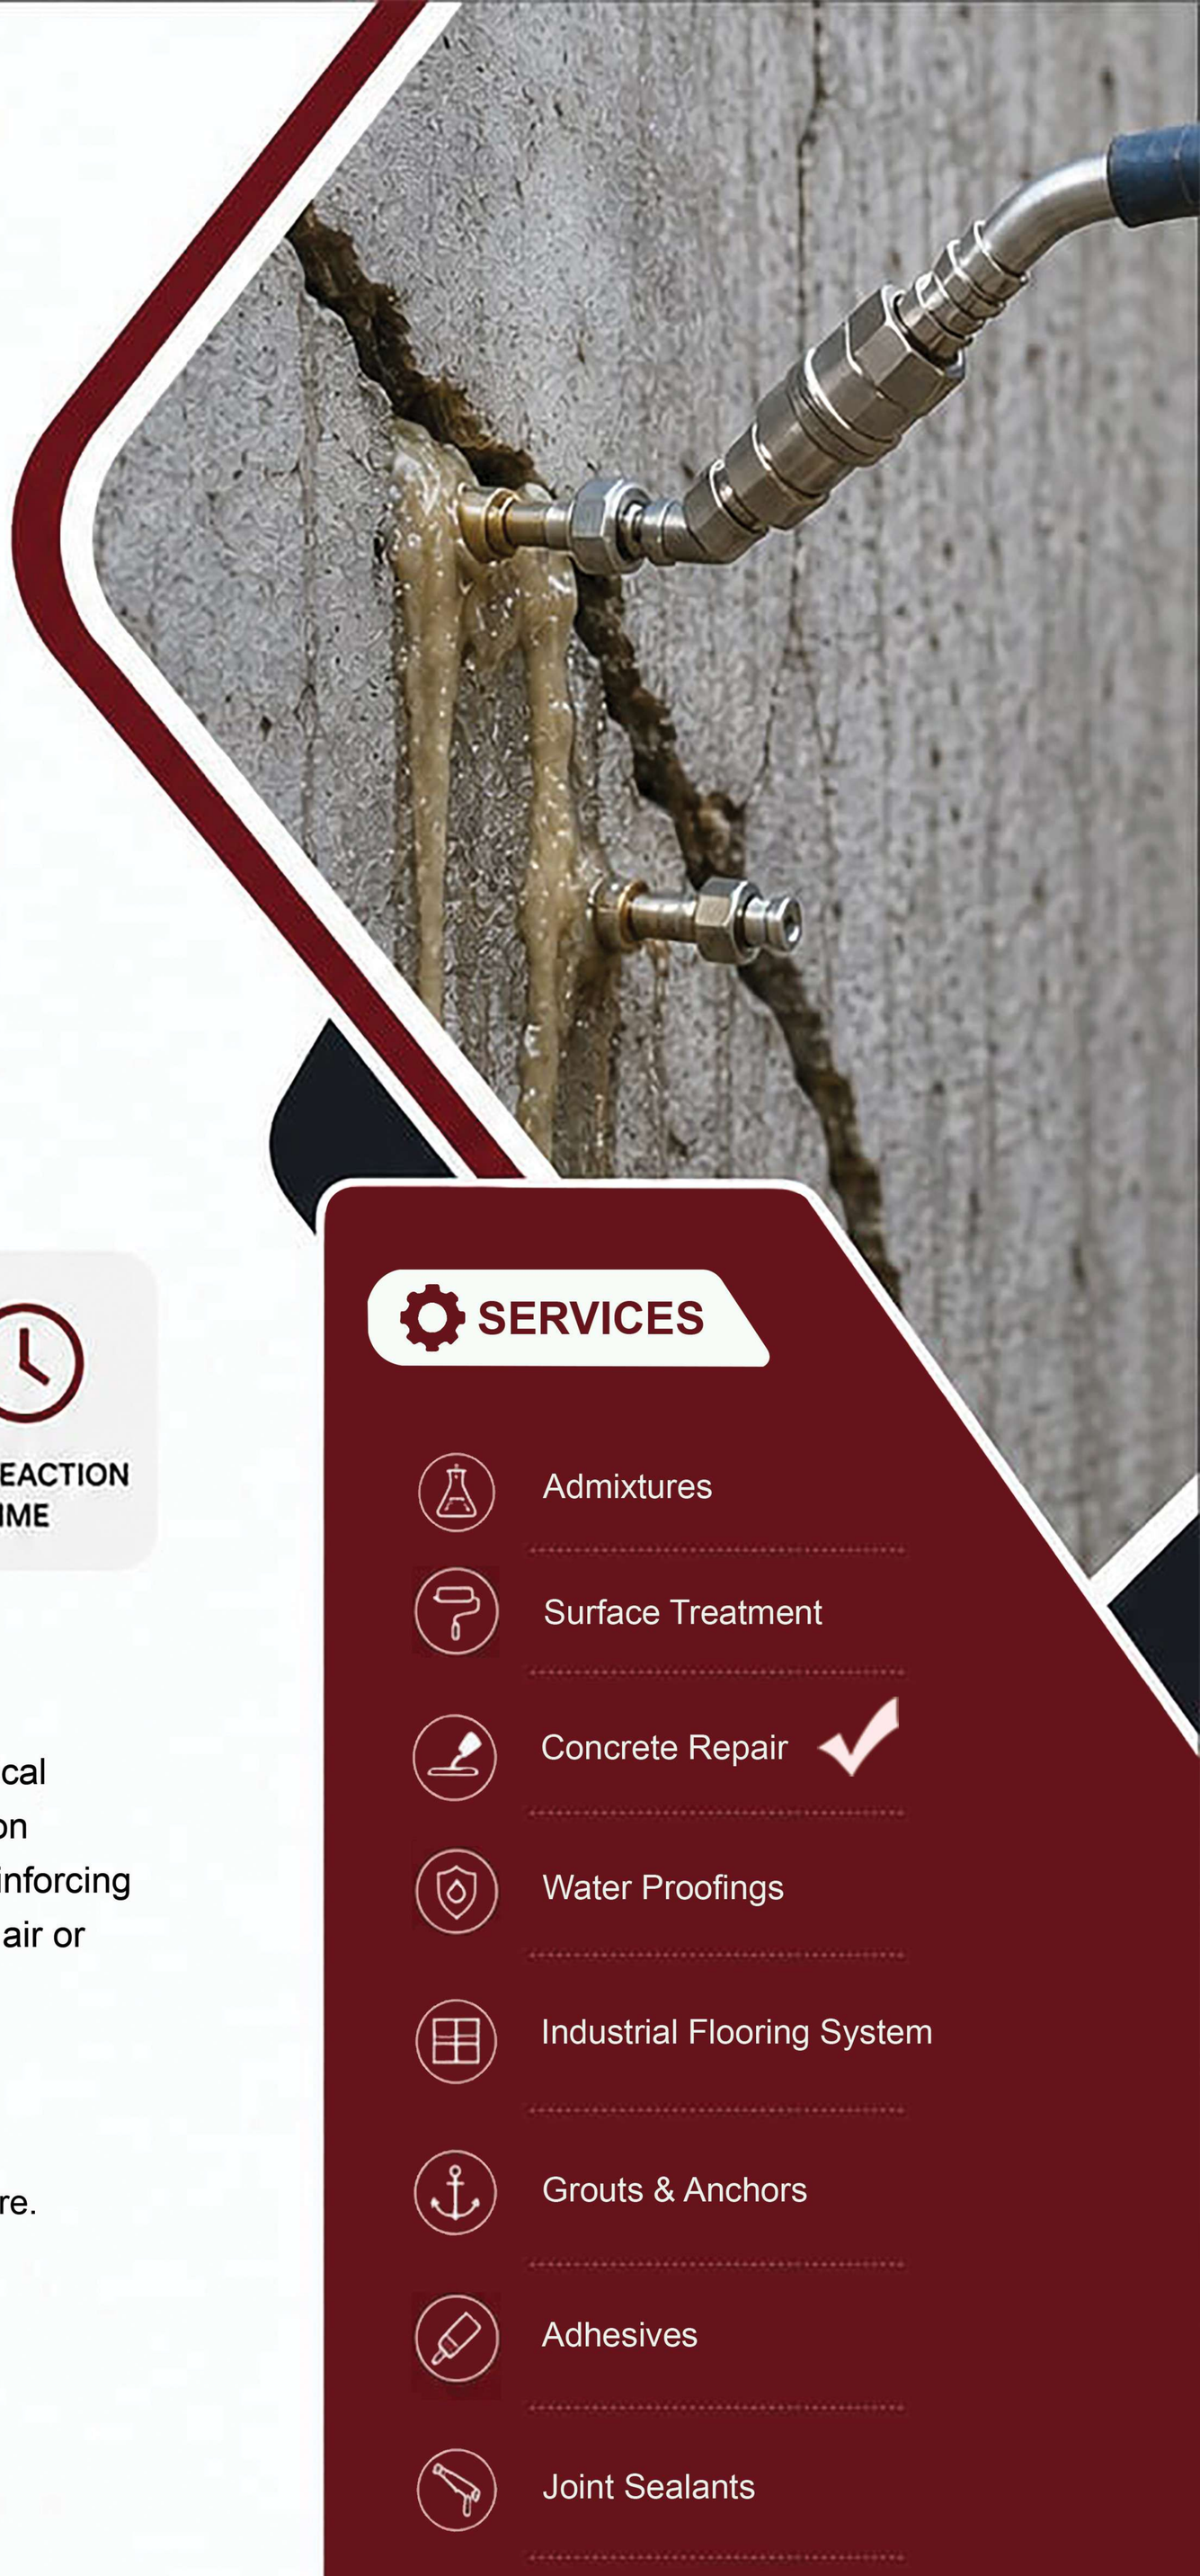

ACTIVE LEAK SEALING | HIGH PENETRATION | FLEXIBLE & DURABLE | FAST REACTION TIME

DESCRIPTION

Chem 1K Injection the high activity polyether used in the chemical manufacture of the polymer grouting material, Chem 1K Injection hydrophobic Polyurethane grout foam, is a curing agent and reinforcing agent. In order to seal pores and fissures, the resin reacts with air or water to create expansion foam solidification.

- Low viscosity
- A superior compressive strength and resists hydrostatic pressure.
- Fill small cracks and chips under 0.4mm

RECOMMENDE USES

- Water leakage
- Concrete cracks
- Tunnels subway
- Dams
- Basement, bathroom expansion joints



SERVICES

- Admixtures
- Surface Treatment
- Concrete Repair ✓
- Water Proofings
- Industrial Flooring System
- Grouts & Anchors
- Adhesives
- Joint Sealants
- Bitumin Products
- Miscellaneous

STRONG WATERPROOFING | FAST & EFFECTIVE INJECTION | LONG LASTING PROTECTION

Office #1, building 99-c, jami commercial street no 11, phase 7, DHA Karachi.

+92 21 35885870

www.thechemicalfactory.com

info@dechemicalfactory.com

TECHNICAL DATA

Property	Value
Appearance	The resin is a homogeneous liquid, free of impurities and stratification.
Colour	Brown
Solid content	>90%
Viscosity at 23 ⍰	258mpa·s - 320mpa·s
Density	1.075/ml
Curing time, S	244
Non-volatile content, %	86
Foaming capacity, %	2276
Compressive strength, Mpa.	12
Packing	10kg /bucket. 7.5-L (Gross Weight)

* only one product is needed on the jobsite, which provides for easier calculation of required resin quantities

CONSUMPTION

Coverage: Approx. 0.1 gallon / gallon void (foam)
Approx. 1 gallon / gallon void (solid resin)

Guidence: 1k Injection is injected until the glue comes out as foam from the next drill hole or the crack's surface.

STANDARDS

- Tested in accordance with DIN 1048 Water Permeability Test.
- Complies with Water Research Council requirements for potable water contact.

IMPORTANT INFORMATION

Supplied in: 10 kg Bucket

Storage: Store dry, frost-free, out of direct sunlight

Self Life: 6 months in original packaging

Hazard Class: Non-hazardous goods.
Consult MSDS for details.

APPLICATION GUIDELINES

DISPENSING

At the suggested dose, add Chem 1k Inject to the concrete mixture. For optimal results, add the additive to freshly mixed concrete or mixing water to guaranty even dispersion. Avoid adding straight to dry cement.

ADVANGATES

The recurring leak issues in the fracture joints are resolved by the new self-repairing technology.

USES

1K Inject permanently and elastically plugs cracks and construction joints while stopping active leaks. It can be injected into both wet and dry fissures. Additionally, the material can be utilized to fill in gaps.

APPLICATION

Before injecting the highly elastic polyurethane gel glue, patch the big settlement joints and fissures with polymer cement mortar.

STORAGE & HANDLING

Store in original, tightly closed containers in a cool, dry place. Keep away from heat, sparks and direct Sunlight.

SAFETY

Wearing protective gear and clothes, such as goggles and gloves, is advised to prevent skin and eye contact. After coming into touch with items, the regions should be cleaned with a lot of water and soap.



ENHANCED DURABILITY

FASTER PLACEMENT

BETTER FINISH & PERFORMANCE

The information above reflects The Chemical Factory's current knowledge and is provided to assist specifiers and contractors.
It does not replace project-specific trials to confirm suitability. Data are typical values under standard conditions; on-site results may vary.
Recommendations are offered in good faith without warranty, as factors beyond our control can affect performance. The Chemical Factory may revise specifications without prior notice. Users are responsible for compliance with applicable standards and regulations.
Technical assistance is available on request.



Office #1, building 99-c, jami commercial street no 11, phase 7, DHA Karachi.
+92 21 35885870
www.thechemicalfactory.com
info@ dechemicalfactory.com