
THE CHEMICAL FACTORY

Built to Dominate

Chem Epo Gloss 100

Solvent-Based Two-Component Epoxy Coating System

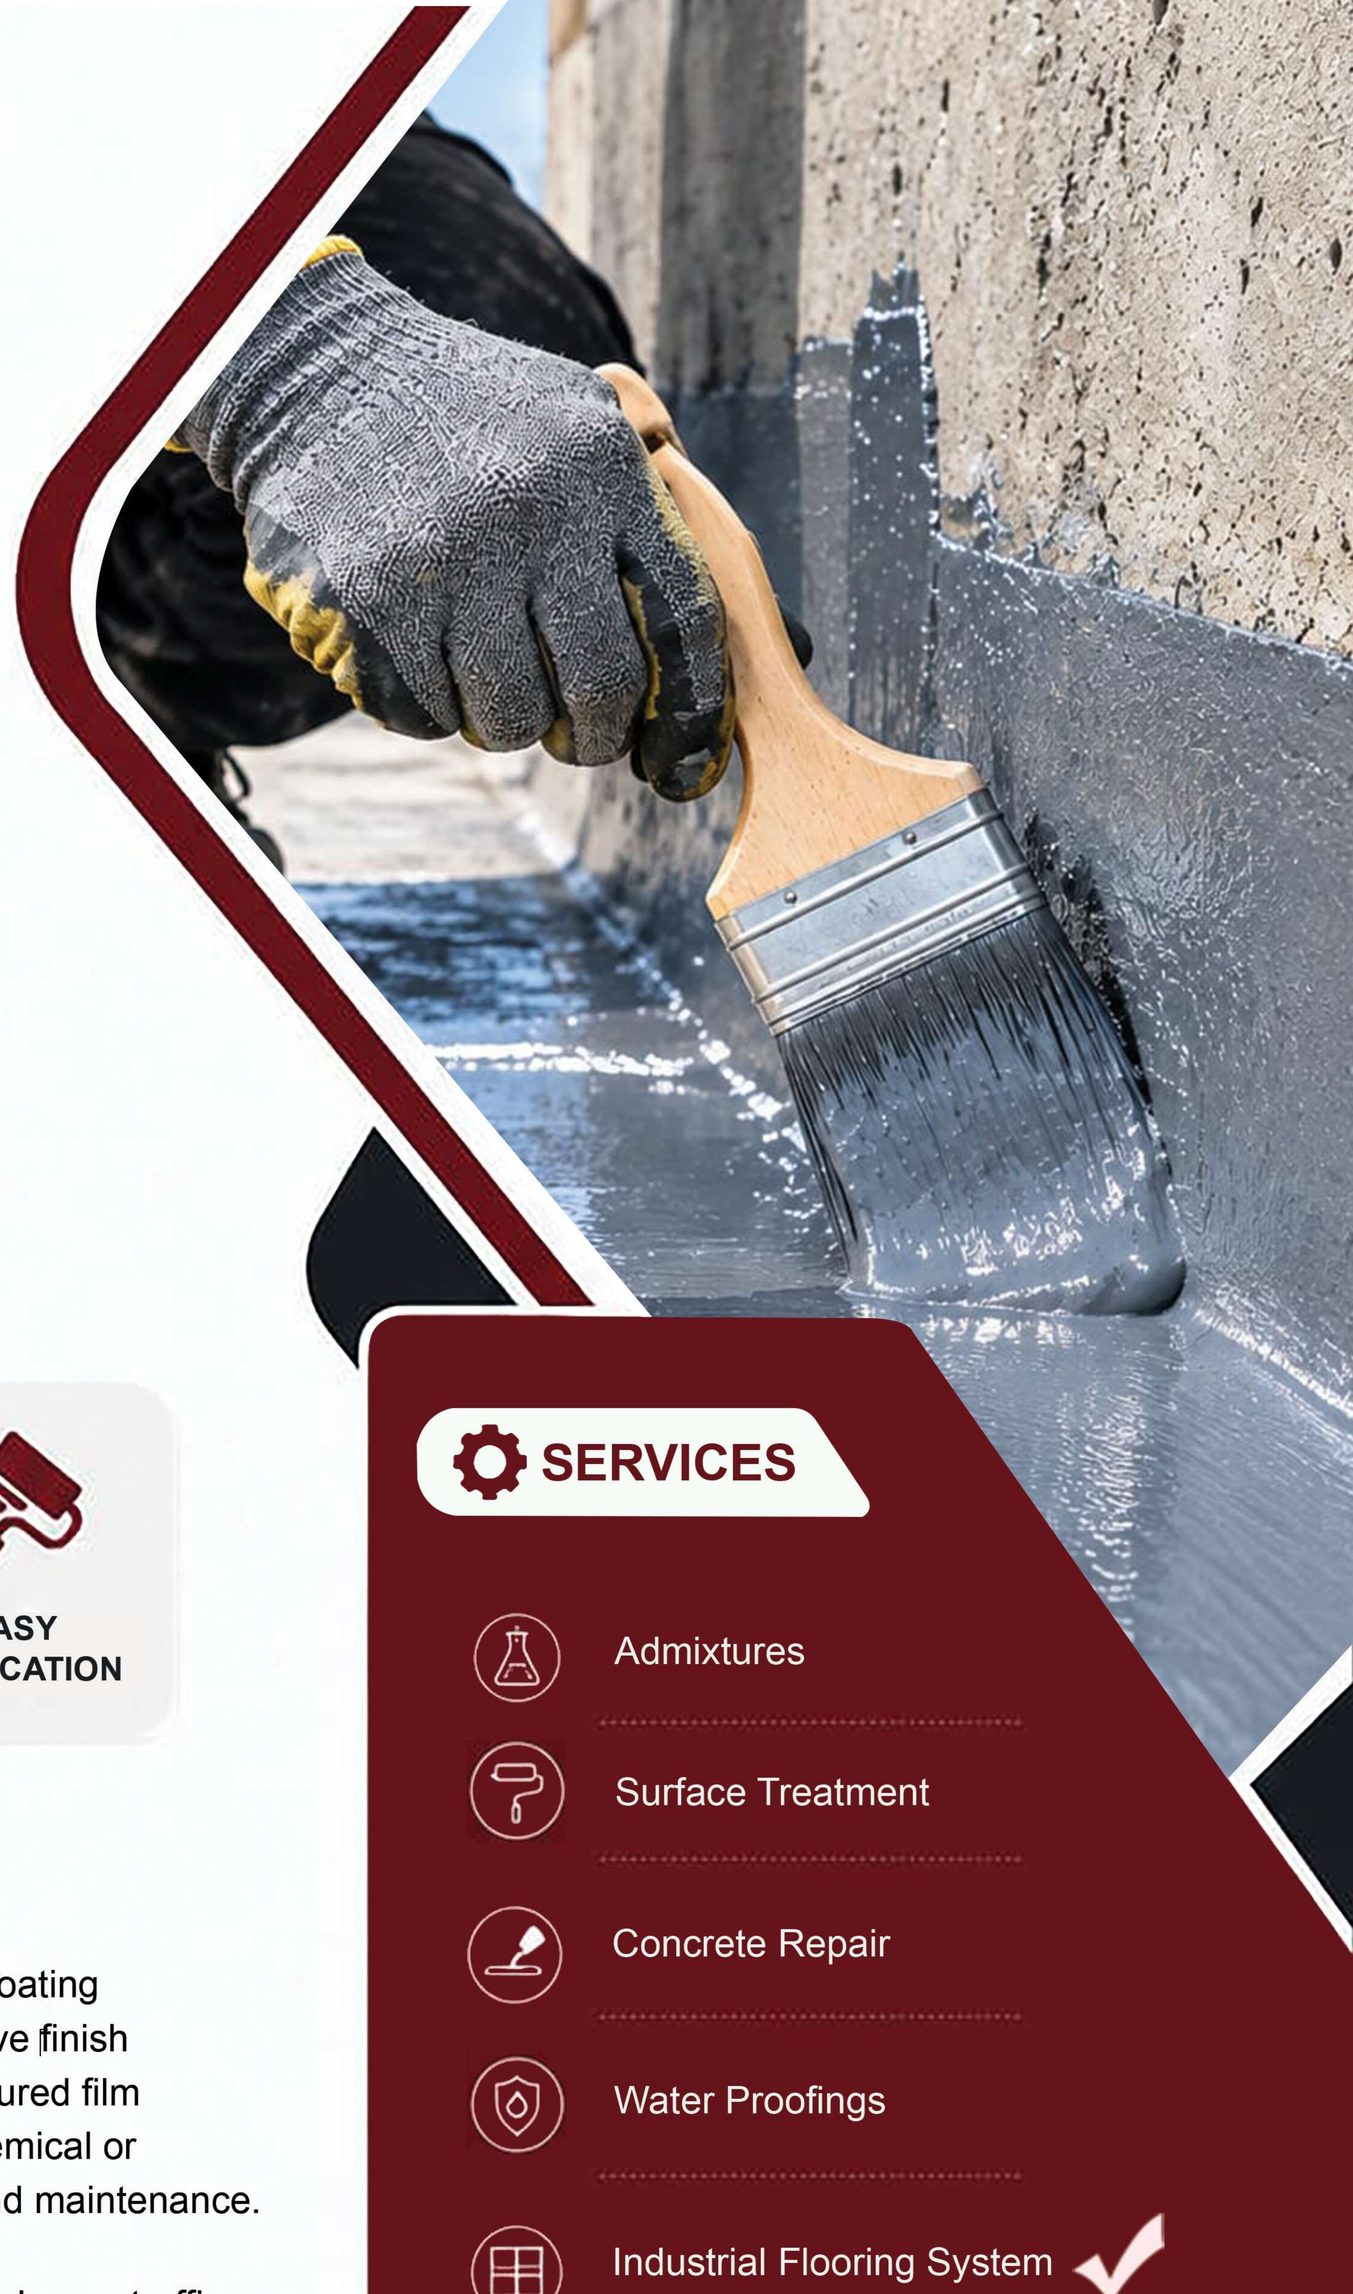

FAST DRYING | **EXCELENT ADHESION** | **CORROSION RESISTANT** | **EASY APPLICATION**

DESCRIPTION

Chem Epo Gloss 100 is a two-component, solvent-based epoxy coating formulated to provide a hard-wearing, smooth and glossy protective finish on properly prepared concrete, wood and metal substrates. The cured film is designed for areas exposed to heavy traffic and demanding chemical or corrosive service, while also supporting easier routine cleaning and maintenance.

- Industrial and commercial concrete floors exposed to regular or heavy traffic.
- Warehouses, workshops, automotive garages and industrial service areas.
- Paper mills, canneries, packing plants and aircraft hangars.
- Wastewater-treatment and similar service environments.
- Farm buildings and concrete block walls.

RECOMMENDE USES

- Two-component epoxy system for a durable cured coating.
- High-gloss, smooth finish that is easy to maintain.
- Good resistance to abrasion associated with traffic and service use.
- Designed for resistance to a broad range of chemicals and corrosive agents.
- Strong adhesion to properly prepared concrete substrates



SERVICES

- Admixtures
- Surface Treatment
- Concrete Repair
- Water Proofings
- Industrial Flooring System ✓
- Grouts & Anchors
- Adhesives
- Joint Sealants
- Bitumin Products
- Miscellaneous

STRONG WATERPROOFING | **FAST & EFFECTIVE INJECTION** | **LONG LASTING PROTECTION**

Office #1, building 99-c, jami commercial street no 11, phase 7, DHA Karachi.

+92 21 35885870

www.thechemicalfactory.com

info@dechemicalfactory.com

TECHNICAL DATA

Property	Value
Appearance / finish	High-gloss epoxy coating
System	Two-component solvent-based epoxy
Substrates	Concrete, wood and metal
VOC content	< 400 g/L (mixed)
Flash point	60°F (TCC)
Pot life	4–6 hours at 60°F
VOC compliance	Compliant with A.I.M. Floor Coatings requirement stated in the reference
Chemical resistance	Resistant to alkalis, solvents, acids, salt solutions, water, fats and oils, halogens (moist), oxidizing agents and fuels
Cure time	Temperature dependent
Toxicity after drying	Non-toxic after drying
Electrical behavior	Not conductive to electrical conductivity
Biological growth	Will not support fungal or bacterial growth
Flammability	Flammable

CONSUMPTION

Coverage: Smooth-trowelled surface: approximately 10 m² per 2.5 kg pack (about 30–40 ft²/kg). Rough-finish surface: approximately 25–35 ft²/kg.

Guidence: Part A: Epoxy resin and pigment package carried in an aromatic solvent system.
Part B: Polyamide/amine curing package carried in an aromatic solvent system.
Both components are supplied as a matched two-part system and must be combined in the specified proportion before application.

STANDARDS

- Colour: Grey And White
- Density: Approx. 1800 kg/m³

IMPORTANT INFORMATION

Supplied in: 16 kg Box

Storage: Storage Condition Cool, covered and dry place; protect from direct sunlight and heat

Self Life: 1 year

Hazard Class: Non-hazardous goods.

APPLICATION GUIDELINES

DISPENSING

Concrete must be sound, clean, dry and free from grease, wax, oils, loose particles, old paint or resin-based curing/sealing compounds. Mechanical abrasion or shot blasting is the preferred preparation method. For smaller areas, acid etching followed by thorough rinsing may be used where appropriate.

MIXING

Stir Part A and Part B separately until uniform. Combine the components by volume, not by weight, and mix thoroughly.
Allow the mixed material to stand for approximately 5 minutes before application.
For larger quantities, use a clean metal mixing container of suitable capacity and maintain consistent mixing throughout the batch.

USES

Do not apply to damp or wet surfaces.
Do not apply at temperatures below 60°F (approximately 15.6°C) unless the system has been specifically approved for lower temperatures.
Drying and curing are temperature dependent; higher temperatures generally shorten working and cure times.

APPLICATION

Confirm that the prepared substrate is clean, dry and suitable for an epoxy coating.
Mix the two components according to the system requirements and use within the practical working life.
Apply uniformly by brush, roller or suitable spray equipment.

STORAGE & HANDLING

Store unopened material in a cool, dry, covered location away from ignition sources and direct environmental exposure. Protect containers from damage and contamination. Use the product within the manufacturer's stated shelf life.

SAFETY

Clean tools and equipment with an appropriate solvent before the coating cures. The mixed system contains flammable solvent components. Keep away from heat, sparks and open flame, keep containers closed when not in use, and provide adequate ventilation.
Avoid prolonged inhalation of vapour or spray mist and avoid contact with skin and eyes. Wear suitable eye protection and chemical-resistant gloves. Keep out of reach of children.



ENHANCED DURABILITY

FASTER PLACEMENT

BETTER FINISH & PERFORMANCE

The information above reflects The Chemical Factory's current knowledge and is provided to assist specifiers and contractors.
It does not replace project-specific trials to confirm suitability. Data are typical values under standard conditions; on-site results may vary.
Recommendations are offered in good faith without warranty, as factors beyond our control can affect performance. The Chemical Factory may revise specifications without prior notice. Users are responsible for compliance with applicable standards and regulations.
Technical assistance is available on request.



Office #1, building 99-c, jami commercial street no 11, phase 7, DHA Karachi.
+92 21 35885870
www.thechemicalfactory.com
info@dechemicalfactory.com