
THE CHEMICAL FACTORY

Built to Dominate

Chem Prime Coat

Fast Drying Epoxy Primer for Concrete & Metal Surfaces

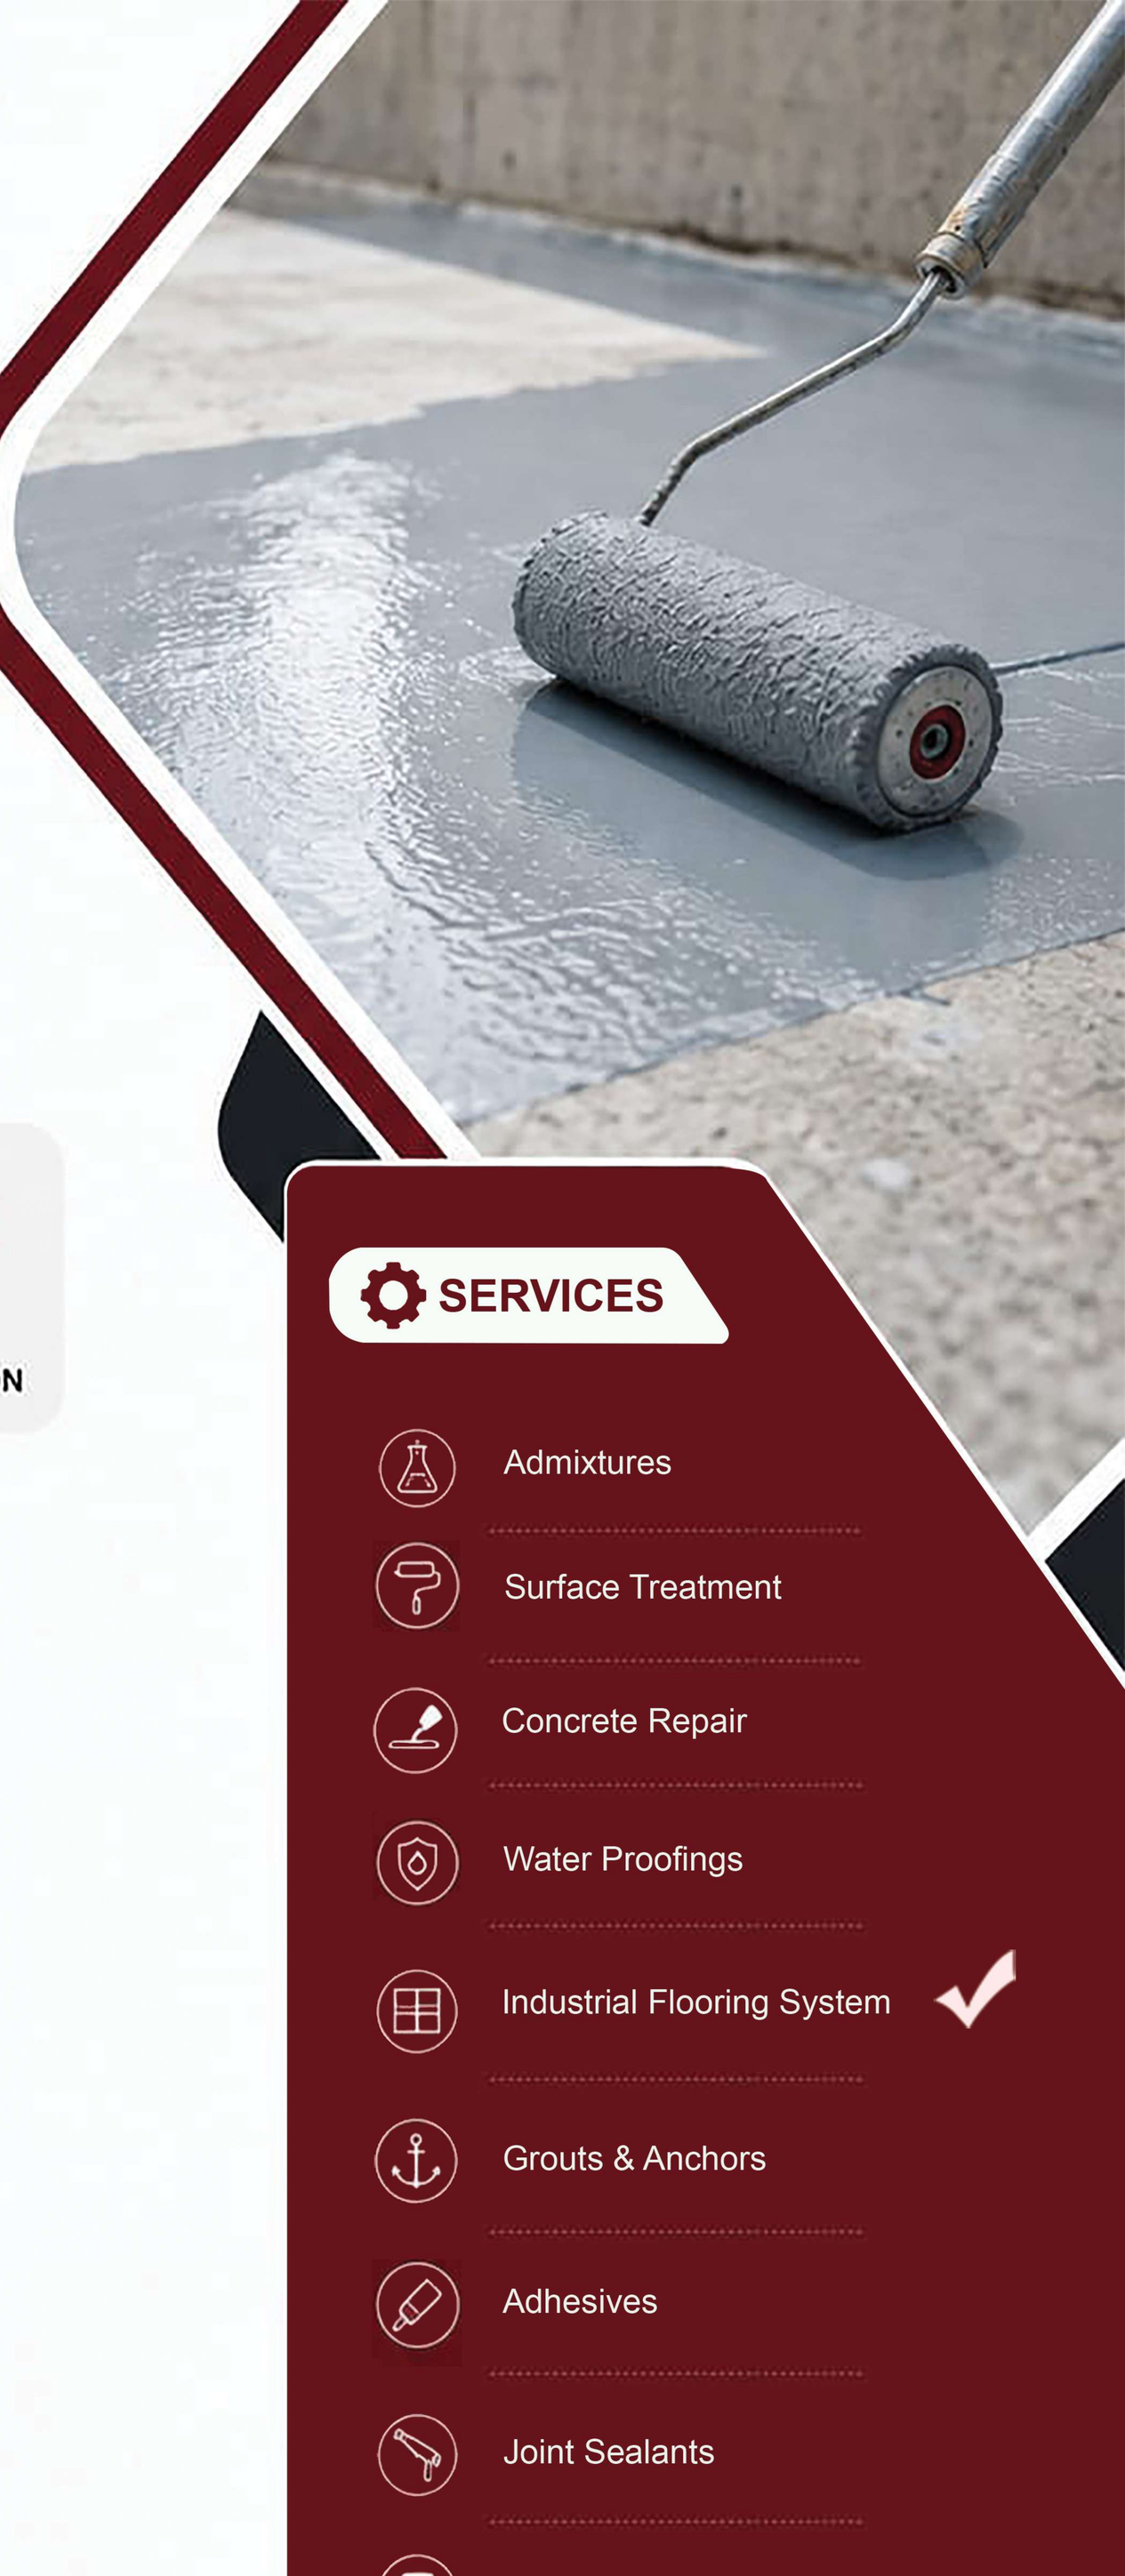

- FAST DRYING
- EXCELLENT ADHESION
- CORROSION RESISTANT
- EASY APPLICATION

DESCRIPTION

Chem Prime Coat is a two component, fast drying epoxy primer designed to provide superior adjesion, excellent penetration and strong bond to concrete and steel surfaces. It enhances the performance of subsequent coatings and protects against moisture and corrosion.

- Fast drying – quick turnaround time.
- Excellent adhesion to concrete and metal.
- Strong penetration for durable bonding.
- Resistant to moisture, chemicals and corrosion.
- Enhances the performance of epoxy & PU coatings.

RECOMMENDED USES

- Epoxy & PU floor systems
- Metal structures and equipment
- Industrial flooring
- Parking decks and bridges
- Concrete surfaces before coating



SERVICES

- Admixtures
- Surface Treatment
- Concrete Repair
- Water Proofings
- Industrial Flooring System
- Grouts & Anchors
- Adhesives
- Joint Sealants
- Bitumin Products
- Miscellaneous

- STRONG ADHESION
- FAST DRYING PERFORMANCE
- SUPERIOR PROTECTION

Office #1, building 99-c, jami commercial street no 11, phase 7, DHA Karachi.

+92 21 35885870

www.thechemicalfactory.com

info@chemicalfactory.com

TECHNICAL DATA

Property	Value
Density	Chem Prime Coat; 1.084 kg/L
Flash point	Epoxy System: > 100 °C
Dilution	Do not Dilute any of the Components
Work life (epoxy)	Approximately 60 minutes (after spreading @ 25 °C
Pot life	Approximately 40 minutes (5 L mixed @ 25 °C
Shelf life	2 years from date of manufacture and in sealed containers stored @ 25 °C
Curing time @ 25 °C (in general)	Touch dry: 8 hours Light foot Traffic: 24 hours Full cure: 7 days
Over-coating time @ 25 °C	Minimum: 12 hours Maximum: 36 hours
Volume solids	Chem Prime Coat: 100%
Application temp range	> 15 °C & < 35 °C
Maximum service temperature	60 °C
Skrinkage after cure	Negligible
Chemicals	Good resistance to Water, oil, fats greases, diesel, dilute acids and alkali.
Packaging	Chem Prime Coat is supplied in 5 liter yield metal containers.

* Do not apply the coating if the humidity is in excess of 85% @ 21 °C or 75% @ 10 °C

CONSUMPTION

Coverage: 4 to 5 m^2 / liter, subject to the surface profilr and porosity of the surface.

Mixing: Proper mixing and proportioning of the epoxy binder (base and activator) is important

Guidence: Ensure the surface in clean, dry and free from dust, oil, grease or latance. Mix both components thoroudghly and evenly. Use within pot life.

STANDARDS

- Tested in accordance with DIN 1048 Water Permeability Test.
- Complies with Water Research Council requirements for potable water contact.

IMPORTANT INFORMATION

Supplied in: 5 liter 75% A & 25% B.

Storage: Store dry, frost-free, out of direct sunlight

Shelf Life: 6 months in original packaging

Hazard Class: Non-hazardous goods.
Consult MSDS for details.

APPLICATION GUIDELINES

DISPENSING

Chem Prime Coat to the surface after proper surface preparation. Mix Part A and Part B in the recommended ratio (2:1 by volume).

MIXING

Mix thoroughly for 2–3 minutes using a low speed mixer until a uniform consistency and color is achieved.

COMPATIBILITY

Compatible with most epoxy and polyurethane topcoats. Perform a small test area before full application.

APPLICATION

Apply evenly using a roller, brush or spray. Ensure uniform coverage and avoid puddling.

STORAGE & HANDLING

Store in original, tightly closed containers in a cool, dry place. Keep away from heat, sparks and direct sunlight.

CLEANING OF EQUIPMENT

Clean all tools and equipment with epoxy thinner immediately after use.



ENHANCED DURABILITY

FASTER PLACEMENT

BETTER FINISH & PERFORMANCE

The information above reflects The Chemical Factory's current knowledge and is provided to assist specifiers and contractors.
It does not replace project-specific trials to confirm suitability. Data are typical values under standard conditions; on-site results may vary.
Recommendations are offered in good faith without warranty, as factors beyond our control can affect performance. The Chemical Factory may revise specifications without prior notice. Users are responsible for compliance with applicable standards and regulations.
Technical assistance is available on request.



Office #1, building 99-c, jami commercial street no 11, phase 7, DHA Karachi.

+92 21 35885870

www.thechemicalfactory.com

info@dechemicalfactory.com