THE CHEMICAL FACTORY

*Built to Dominate*

# Chem Structo Rep

Fiber reinforced, thixotropic repair mortar



HIGH FLOW | HIGH STRENGTH | EXCELLENT BOND | DURABLE FINISH

## DESCRIPTION

Chem Structo Rep is a one component thixotropic, dual shrinkage compensated, fiber reinforced high strength formulation for structural concrete repairs.

- Can be applied vertically or overhead by low pressure wet-spraying or hand trowelling
- Dual shrinkage compensated
- One component - only addition of water
- High early and ultimate strengths
- Quality controlled - uniform, predictable results
- No additional bonding agent required
- Spray able, virtually non-sag bound

## RECOMMENDE USES

- Bonding masonry
- Filling gaps
- Distributing weight
- Absorbing movement
- Repairing joints



## SERVICES

- Admixtures
- Surface Treatment
- Concrete Repair ✓
- Water Proofings
- Industrial Flooring System
- Grouts & Anchors
- Adhesives
- Joint Sealants
- Bitumin Products
- Miscellaneous

SUPERIOR WATERPROOFING | LONG LASTING DURABILITY | ENHANCED SURFACE PROTECTION

Office #1, building 99-c, jami commercial street no 11, phase 7, DHA Karachi.

+92 21 35885870

www.thechemicalfactory.com

info@dechemicalfactory.com

## TECHNICAL DATA

| Property | Value |
|---|---|
| Type | Chem Structo Rep |
| Color | Grey powder Water/powder ratio |
| Density of freshly mixed mortar kg/dm³ | 2.3 |
| Water/powder ratio | by weight 0.14 |
| Compressive strength ASTM C109 | 1 days 2,900 PSI |
| | 3 days 7,250 PSI |
| | 7 days 8,700 PSI |
| | 28 days 10,150 PSI |
| Flexural strength ASTM C348 | 28d — >1,305 PSI |
| Tensile strength ASTM C496 | 28d — 580 PSI |
| Resistivity approx.: | 125000 cm [unit/notation unclear] |
| Water penetration (DIN 1048) | <5mm |
| Diffusion: | 2.58 × 10[unclear] |

## CONSUMPTION

**Guidence:** Prepare the final surface free from dust and debris and to a rough profile with at least 5 mm level difference between surface troughs and peaks

## STANDARDS

- Tested in accordance with DIN 1048 Water Permeability Test.
- Complies with Water Research Council requirements for potable water contact.

## IMPORTANT INFORMATION

**Supplied in:** 20 Kg Bag

**Storage:** Store dry, frost-free, out of direct sunlight

**Shelf life:** 1 year in original packaging

**Hazard Class:** Non-hazardous goods.

## APPLICATION GUIDELINES

### Surface Preparation

The prepared surface should be structurally sound and free from contaminants. Remove concrete that has been saturated with oil or grease. Simple light blasting will not provide a sufficient profile for most repairs. Depending on the substrate condition and environmental requirements, use an effective method for removal of weak concrete such as, wet grit blasting, high pressure water jetting and needle scaling.

### Mixing

Chem Structo Rep must be mixed mechanically. Use a heavy-duty, slow speed drill with spiral mixing paddle or a Pan Type mixers etc.
Place approximately 80% of the water in the mixer. Keeping the mixer running, add powder slowly. Mix for 3-4 minutes or until a lump-free mix is obtained. Add from the balance 20% water, while continuing to mix, until the desired consistency is achieved.

### Application

Applying repair mortar requires proper surface preparation, precise mixing, and correct application techniques to restore damaged concrete and masonry.

### Curing & Protection


Proper curing and protection are essential for repair mortar to develop full strength, prevent cracking, and ensure a durable bond.

### Cleaning of Equipment

Chem Structo Rep should be removed from tools and equipment immediately after use. Cured material can only be removed mechanically.

### Storage & Handling

Store bags in a dry indoor space off the ground to block ground moisture.

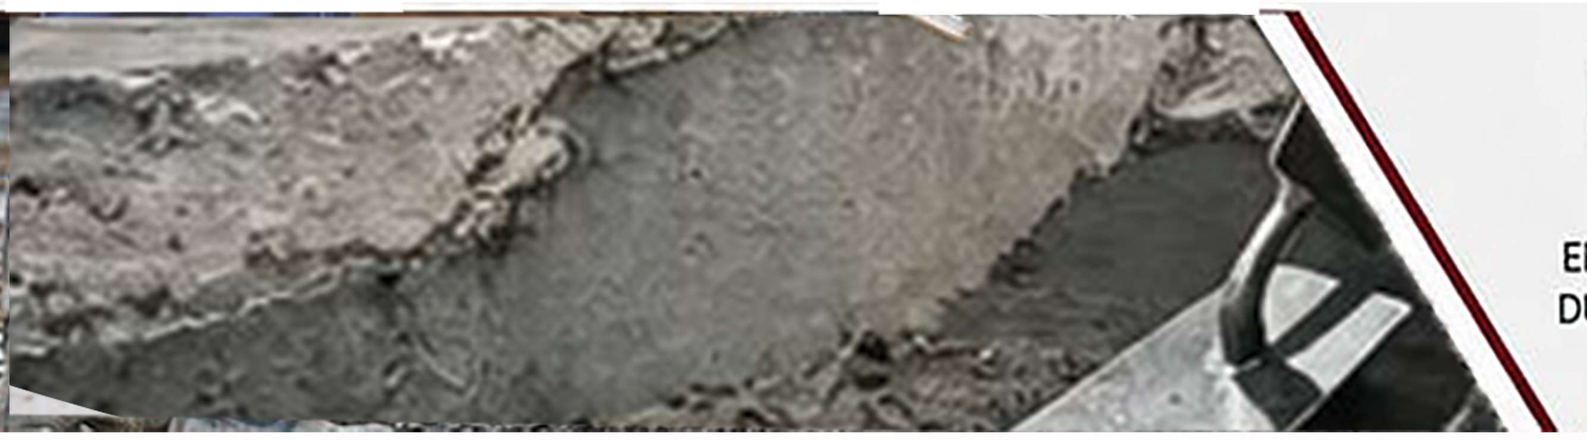

ENHANCED DURABILITY

FASTER PLACEMENT

BETTER FINISH & PERFORMANCE

The information above reflects The Chemical Factory's current knowledge and is provided to assist specifiers and contractors.
It does not replace project-specific trials to confirm suitability. Data are typical values under standard conditions; on-site results may vary.
Recommendations are offered in good faith without warranty, as factors beyond our control can affect performance. The Chemical Factory may revise specifications without prior notice. Users are responsible for compliance with applicable standards and regulations.
Technical assistance is available on request.



Office #1, building 99-c, jami commercial street no 11, phase 7, DHA Karachi.

+92 21 35885870

www.thechemicalfactory.com

info@ dechemicalfactory.com