




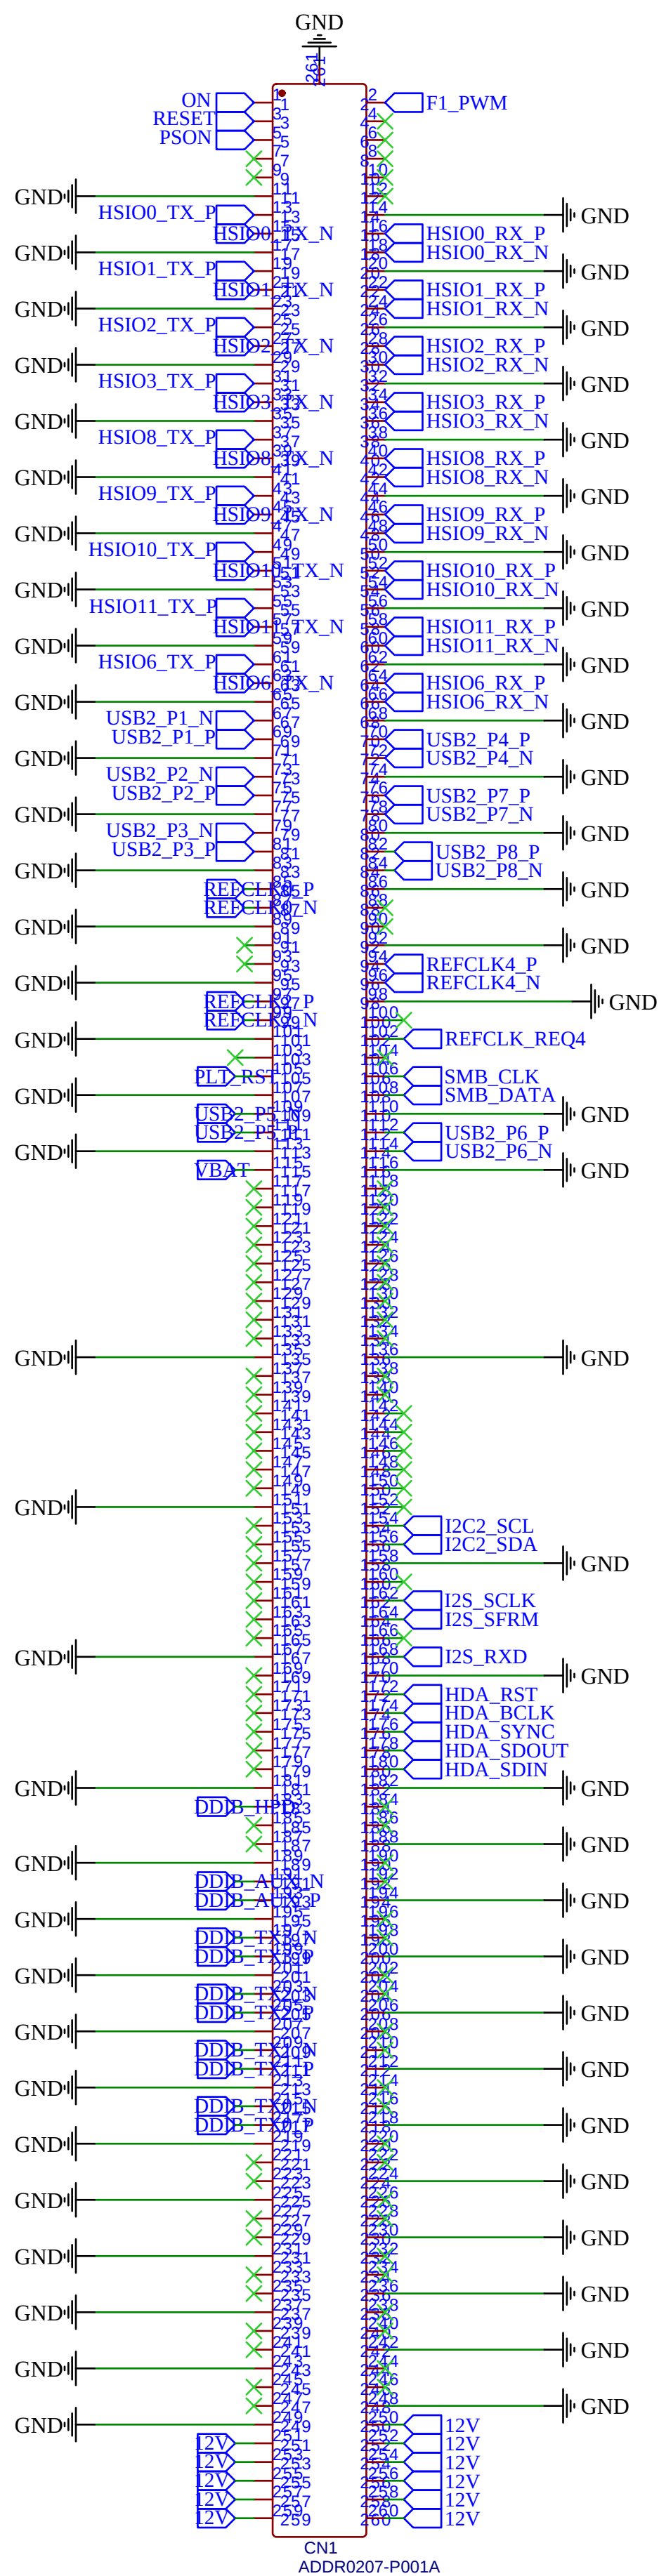


pwr and hibernation stuff to be taken care off

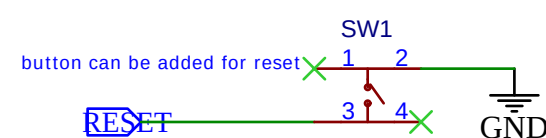


usb2_6 port for feature expansion internally



USB 2.0

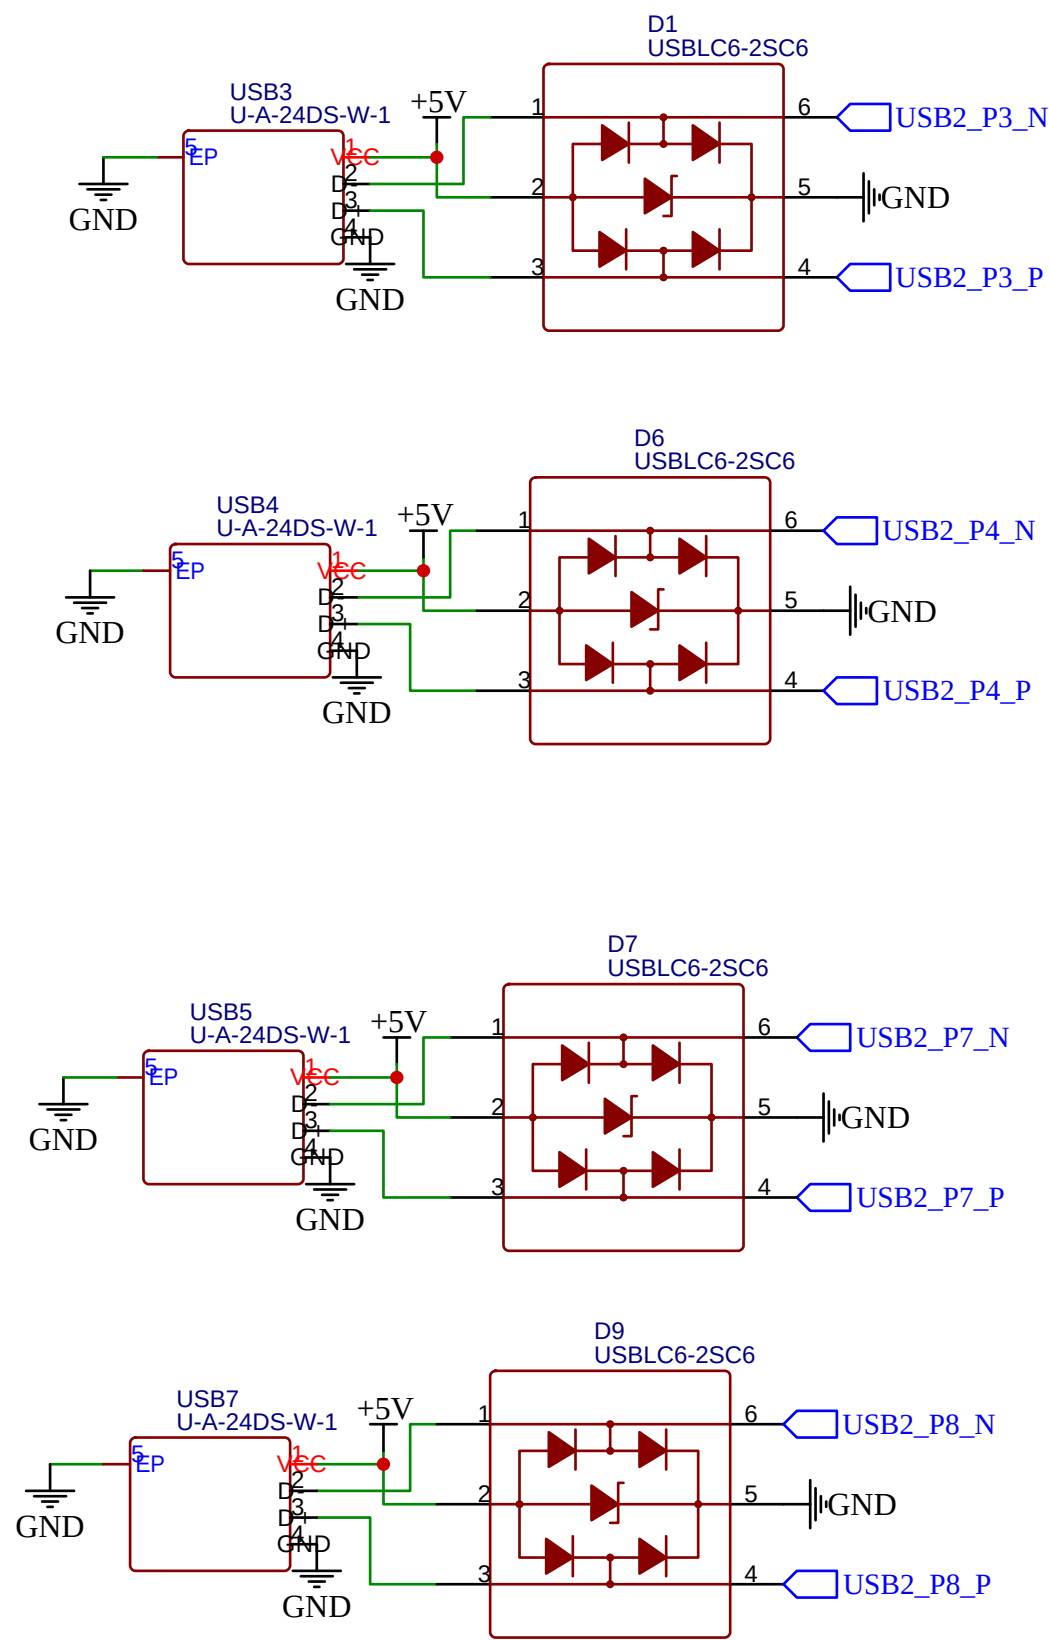

USB-A 3.0

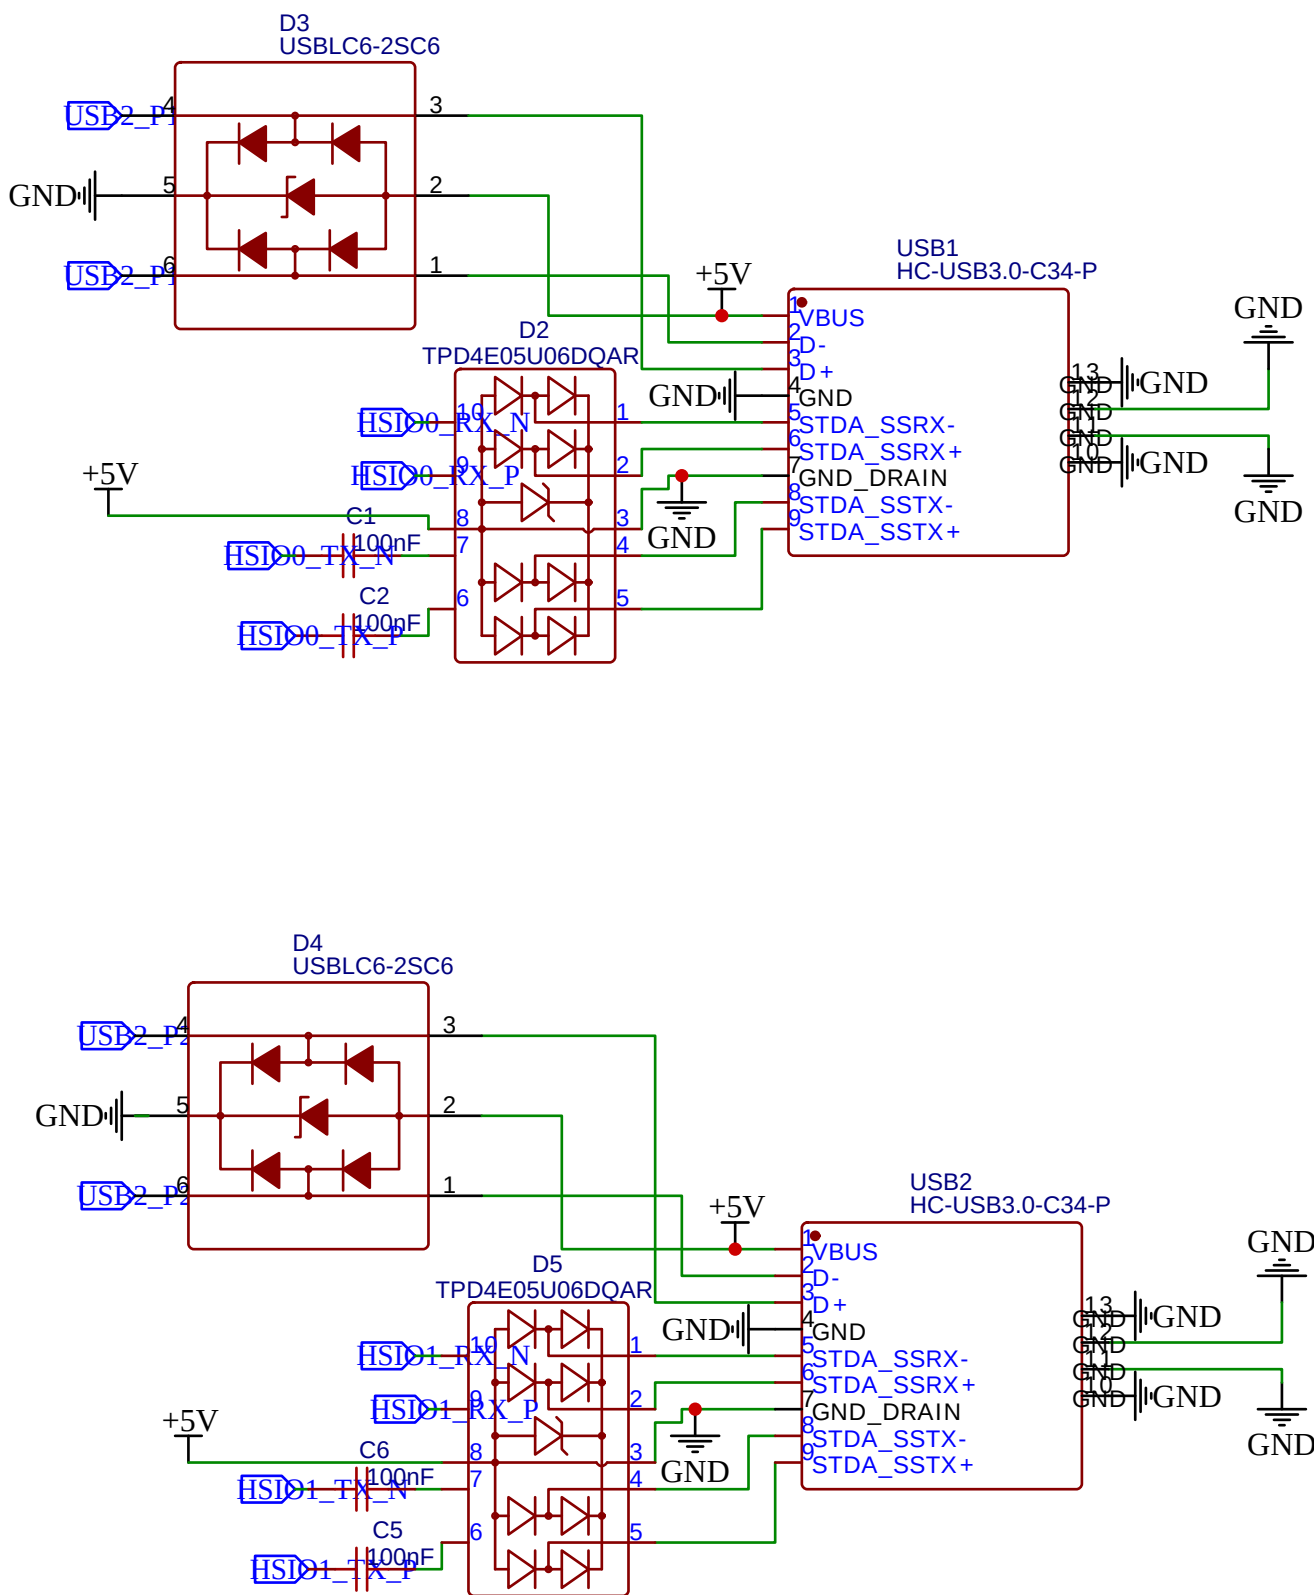

TITLE:

Ports

REV: 1.0




EasyEDA

Company: Rabie


Sheet: 1/1

Date: 2026-07-18

Drawn By: rabie ul awal

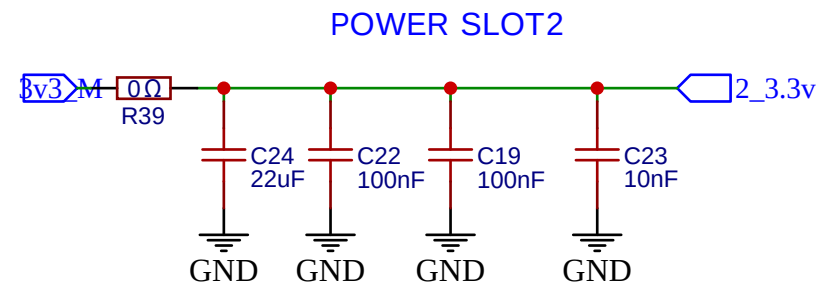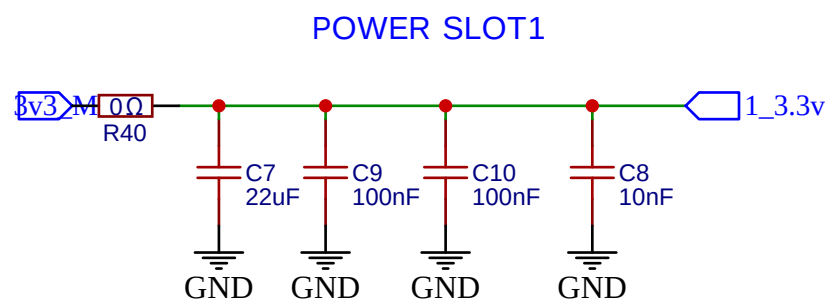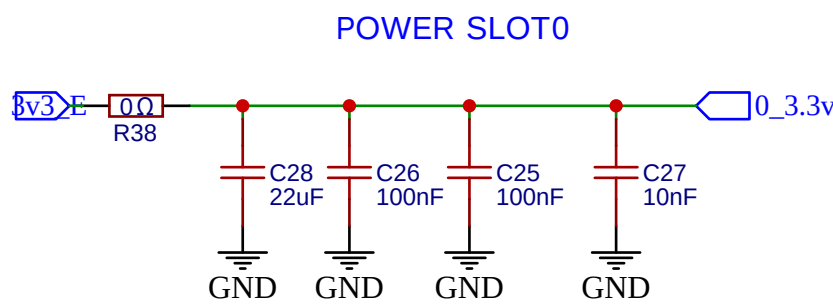



E key

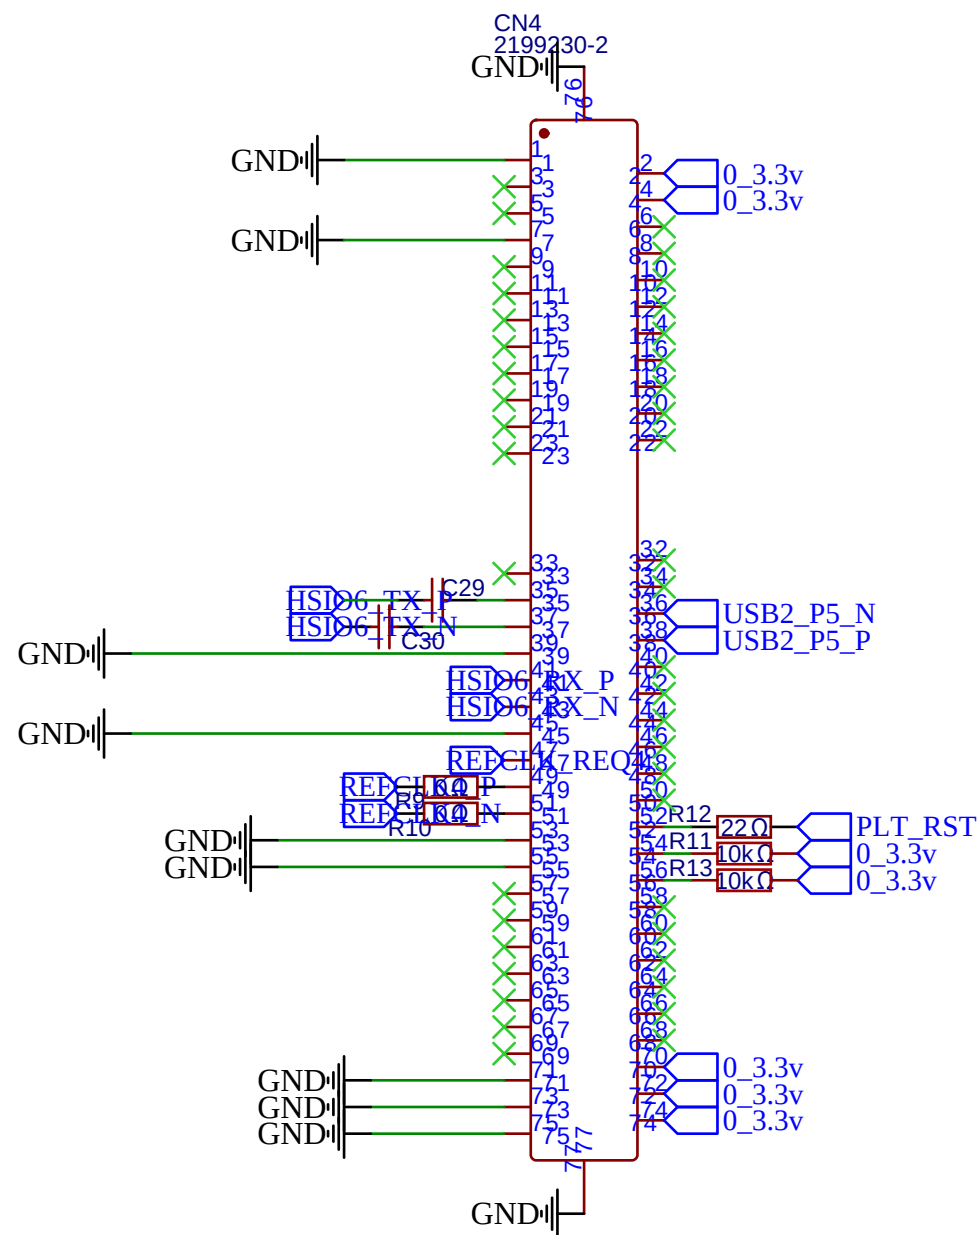


4 LANE SLOT

M-KEY Slots


2 LANE SLOT

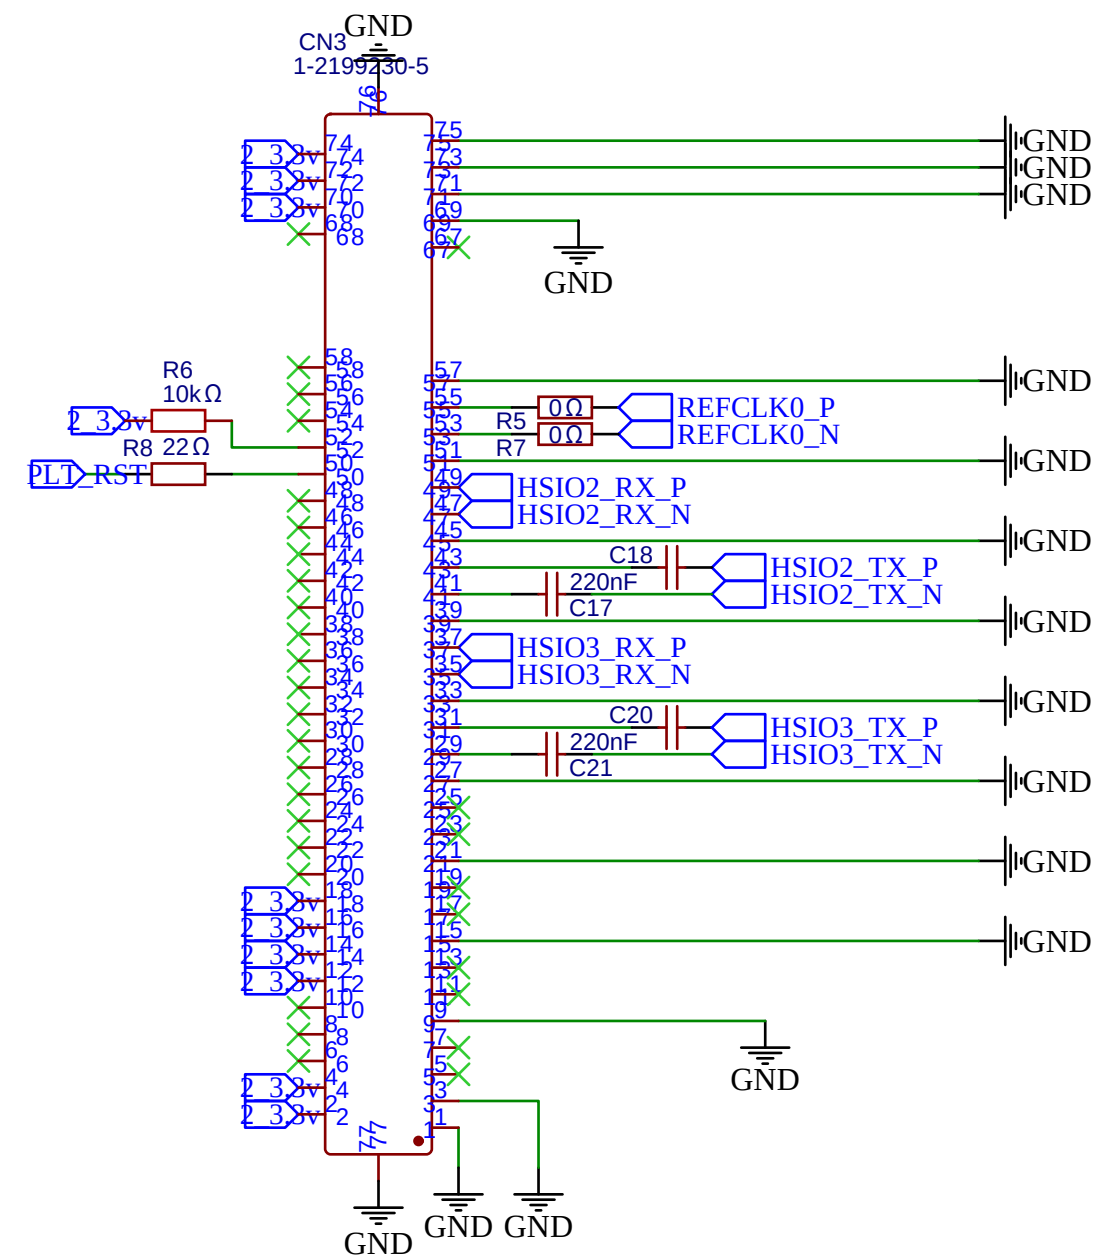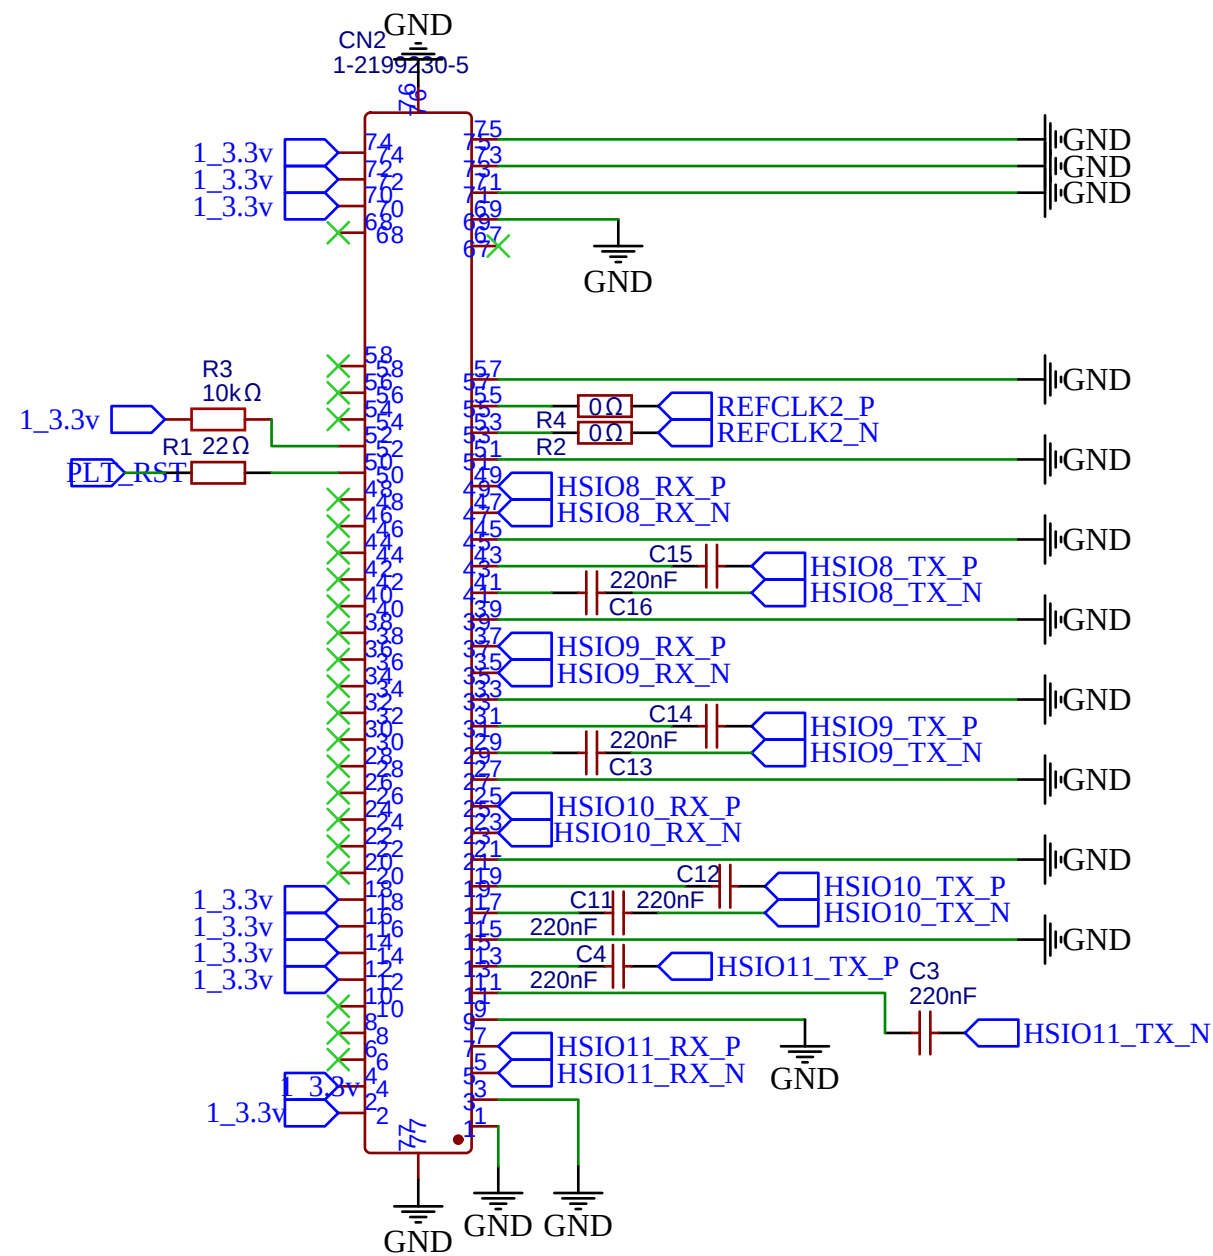


USB-C POWER INPUT

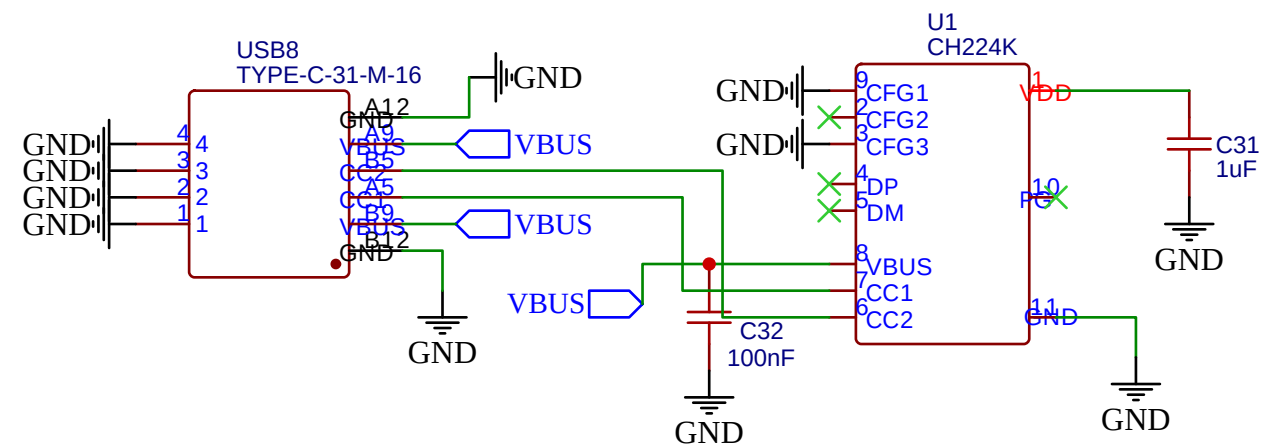



Input to 5v

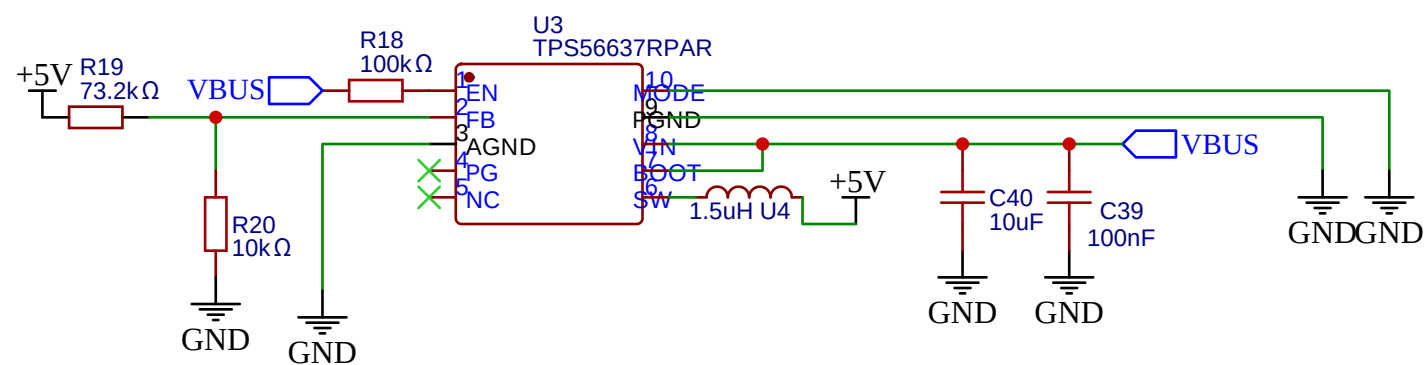


Input to 12v converter

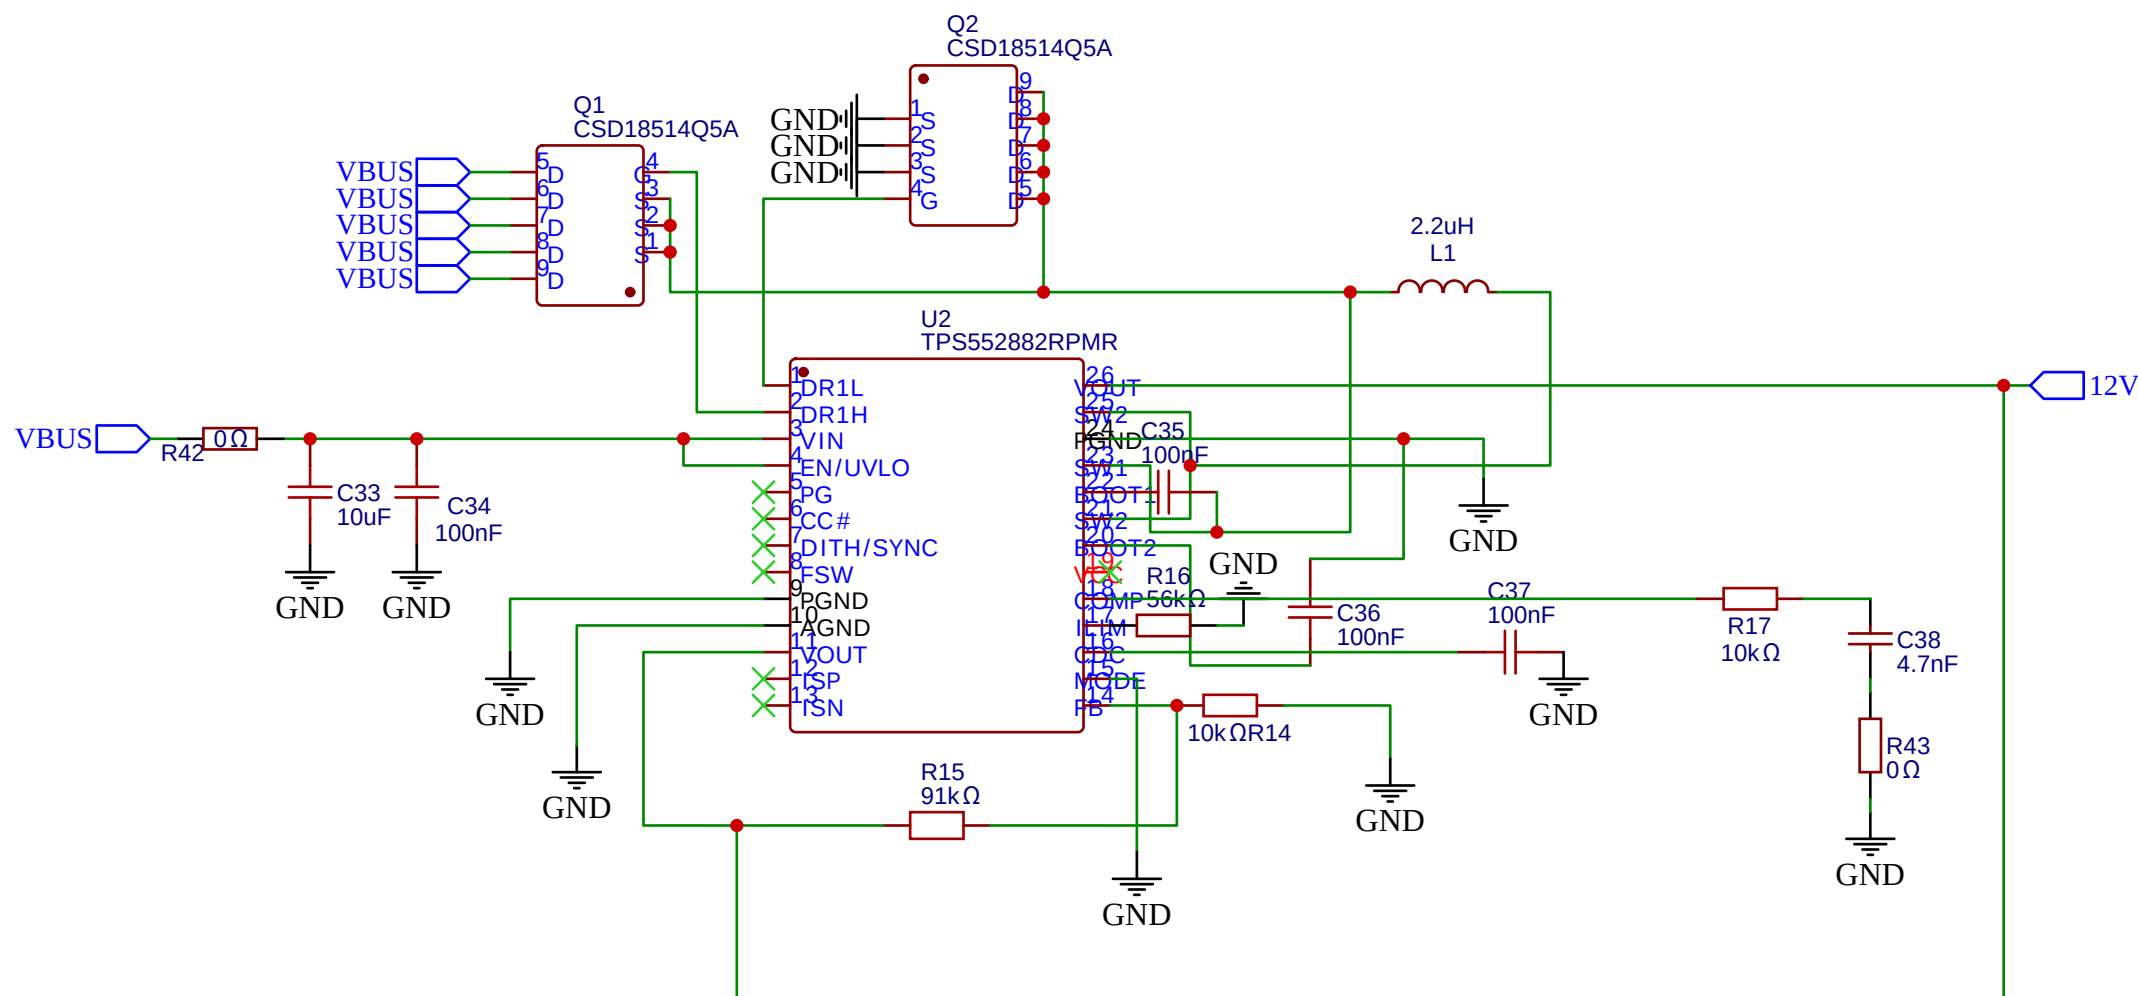

input to 3.3v

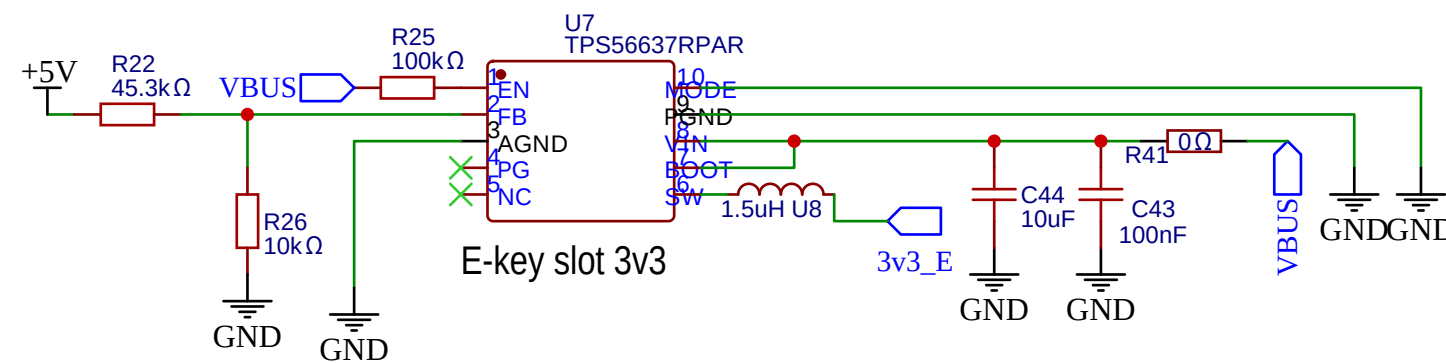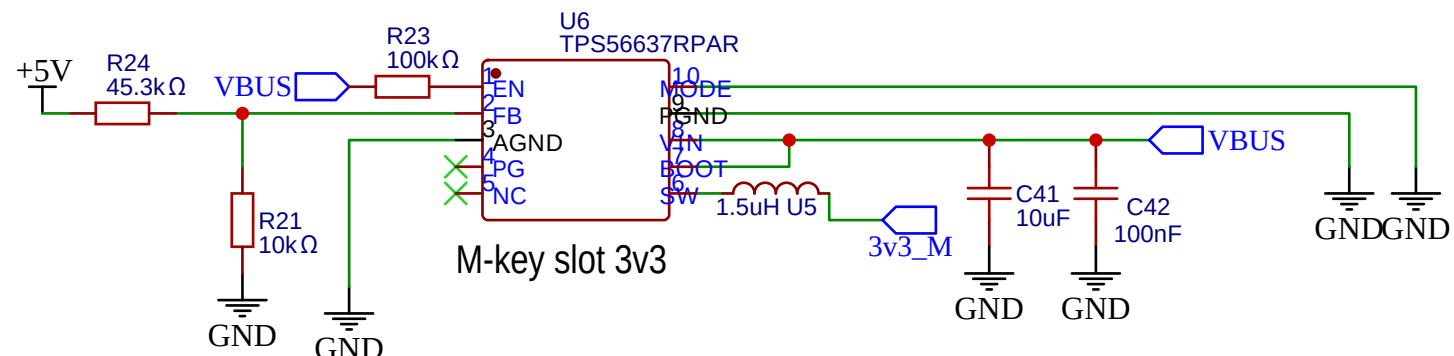


battery

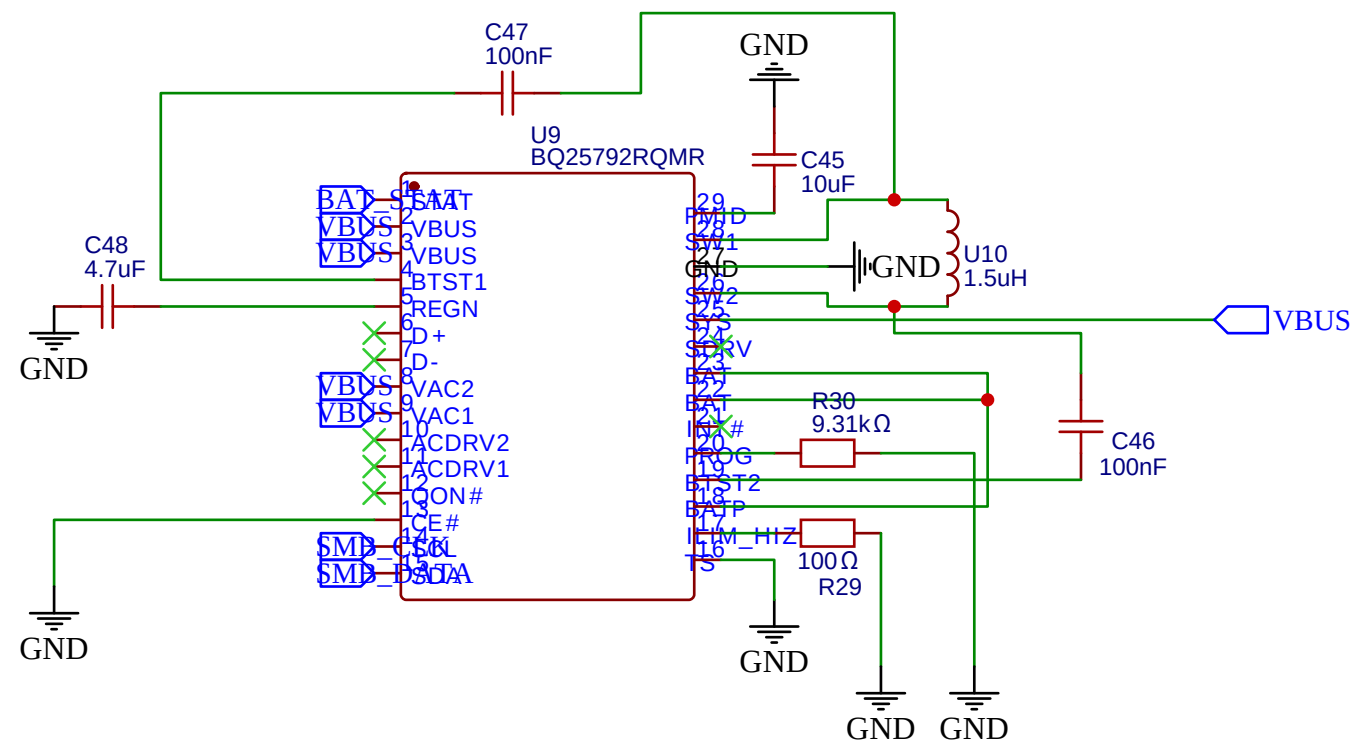


Dell 69KF2 86wh battery is decided to be used

CMOS battery

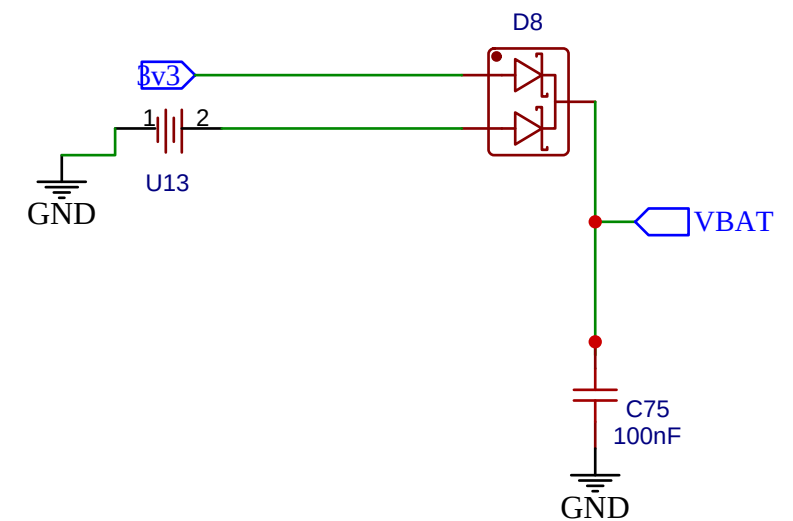


charging indicator

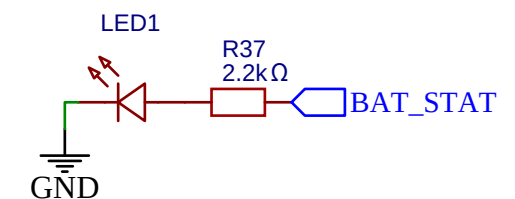


TITLE: battery		REV: 1.0
EasyEDA	Company: rabie	Sheet: 1/1
	Date: 2026-07-19	Drawn By: rabieulawal.h


Display port

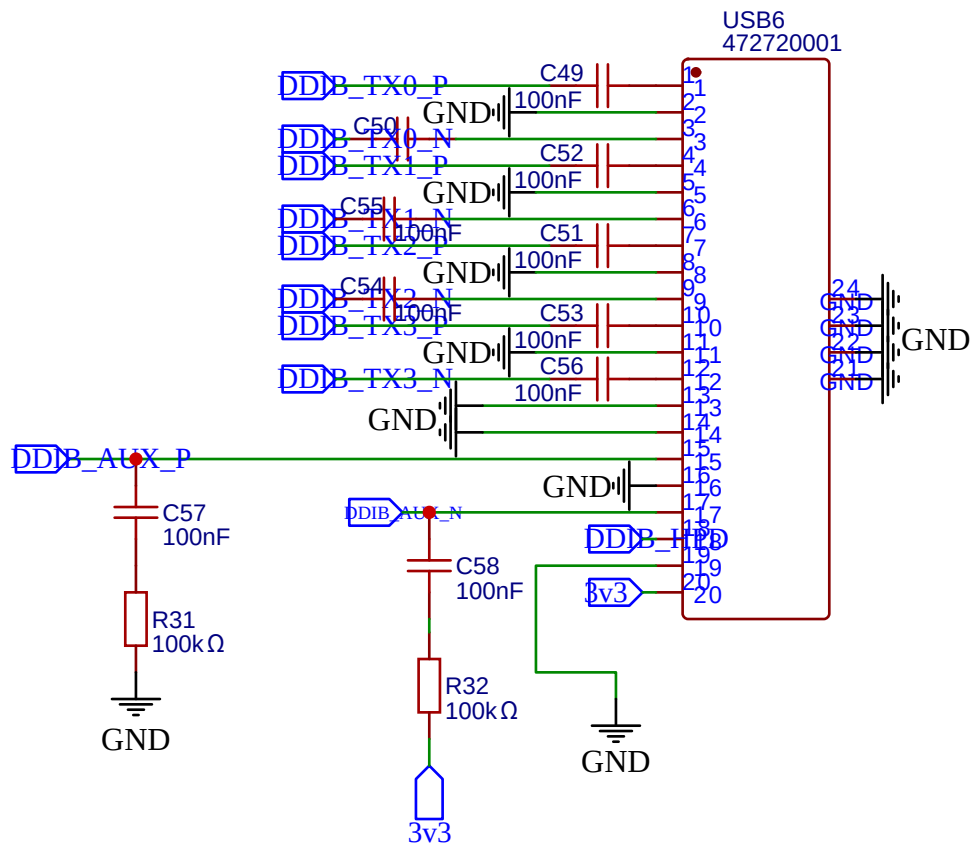

Internal speckers

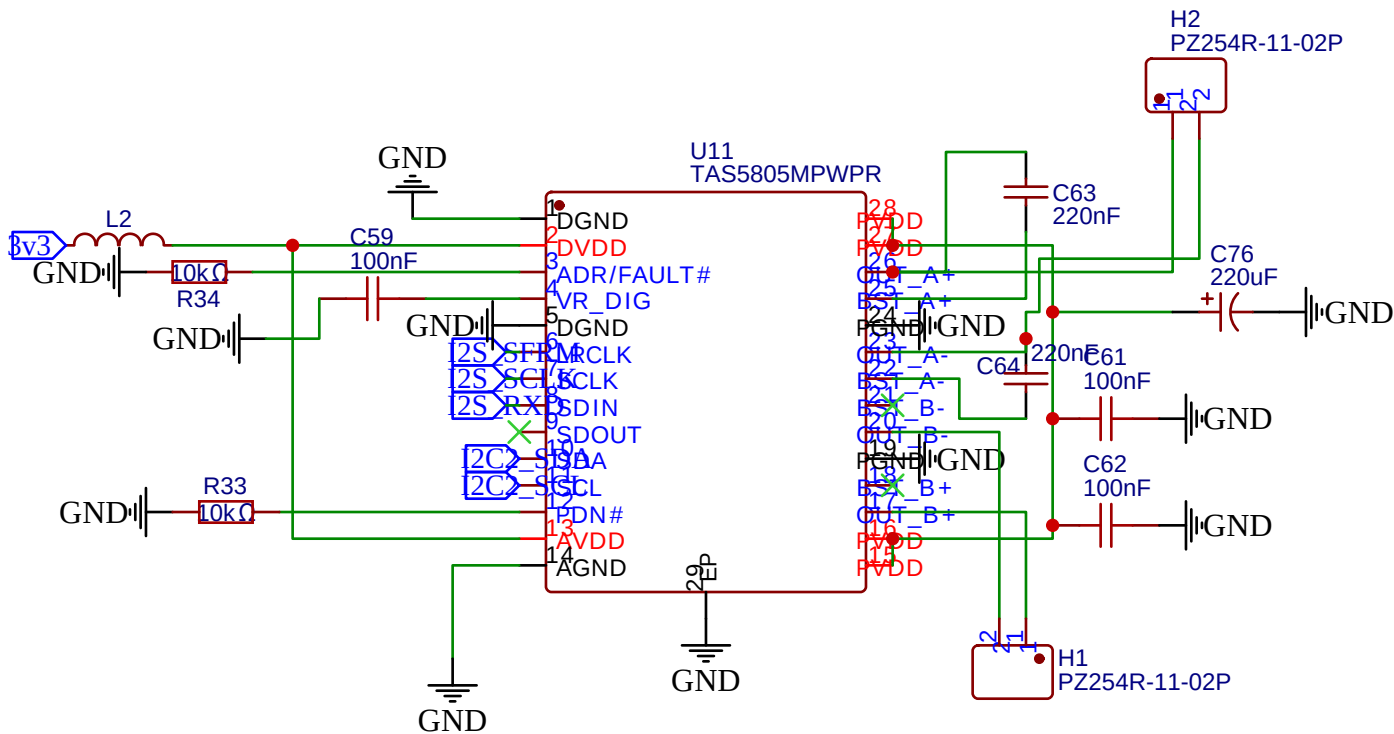

microphone

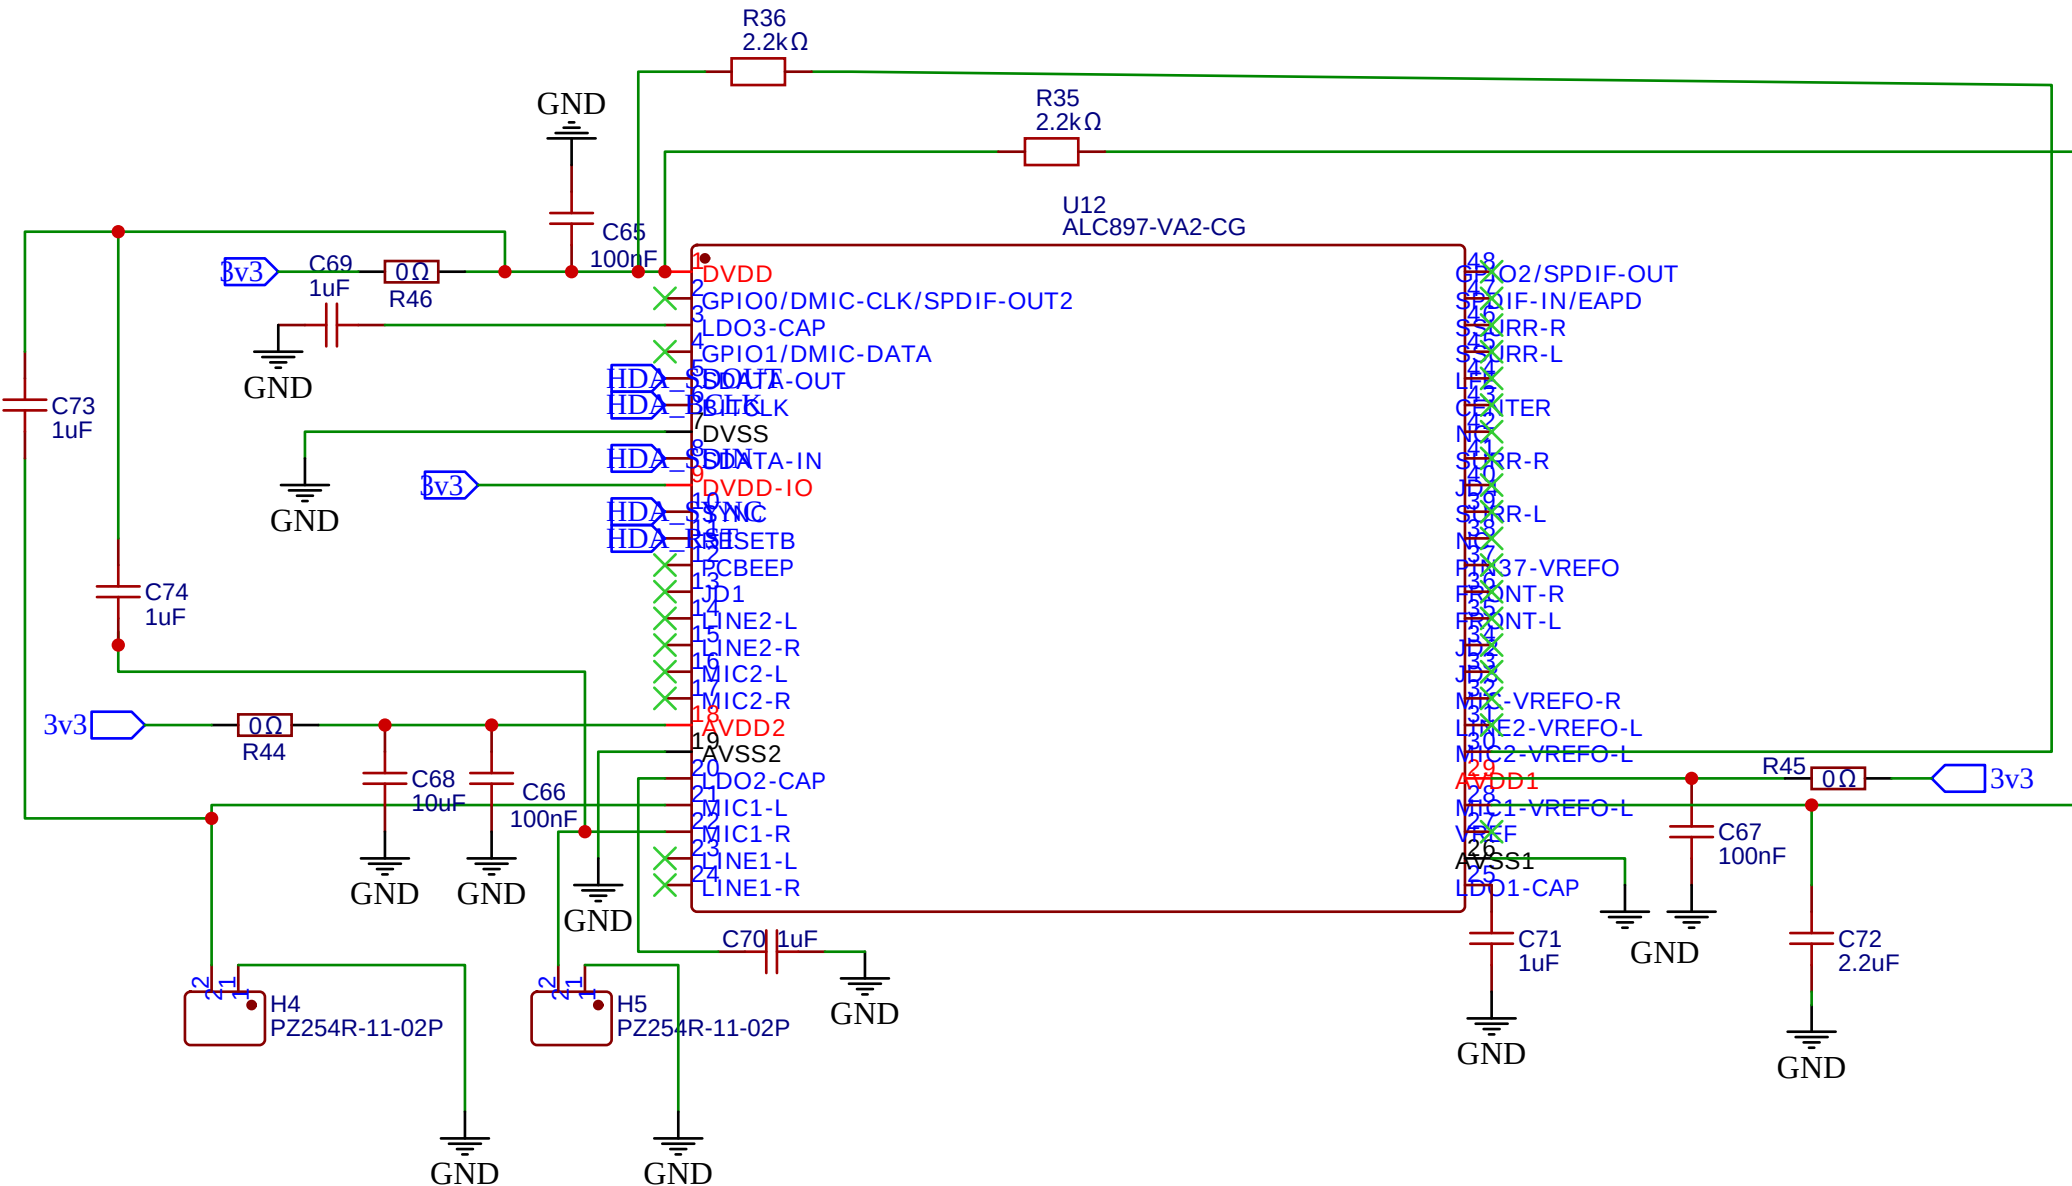

power button port

