

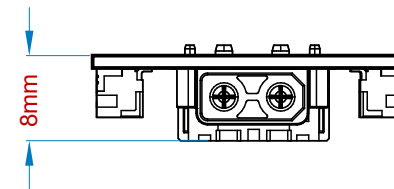


## TOP SIDE

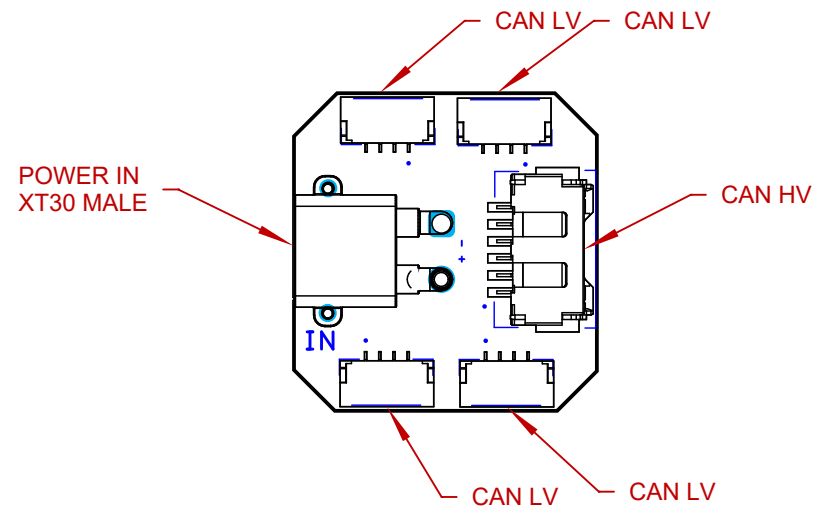

## BOTTOM SIDE

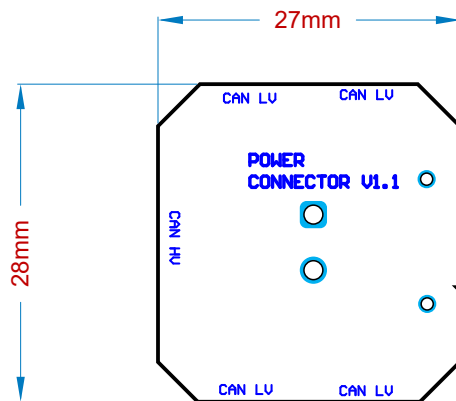

1. CAN LV pinout:  
5V  
CAN H  
CAN L  
GND
2. CAN HV pinout:  
5.5 - 30 V  
CAN H  
CAN L  
GND

Designator	Quantity	MF	MP	Value	Package	Description	Instructions	Type	HelpURL	ChipDip_Link	Name
CAN1, CAN2, CAN3, CAN4	4	JST Sales	SM04B-GHS-TB_LF__SN_-		None	Connector Header Surface Mount, Right Angle 4 position 0.049_1.25mm_			<a href="http://www.farnell.com/datasheets/2082975.pdf">http://www.farnell.com/datasheets/2082975.pdf</a>	<a href="https://www.chipdip.ru/product/sm04b-ghs-tb-lf-sn-gh-1.25mm-header-side-ent">https://www.chipdip.ru/product/sm04b-ghs-tb-lf-sn-gh-1.25mm-header-side-ent</a>	SM04B-GHS-TB(LF)(SN)-
CAN-B1	1	Molex	502585-0670		None	1.50mm Pitch, CLIK-Mate PCB Receptacle, Single Row, Surface Mount, Right-Angle, Tin Plating, Positive Lock, 6 Circuits, Natural					502585-0670
IN	1	AMASS	XT30PW-M		Package Analog Devices						XT30PW-M