Download PDF

RACK SCAN REPORT

RK-00A187E2

Scanned: Apr 24, 2026, 14:36

UNITS

U01-U18

DEVICES


19

PORT IDENTIFICATIONS

Port 44

U10-SW02

Switch · U10

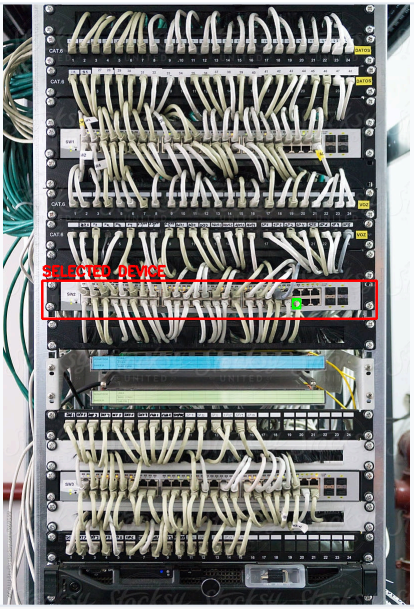




Port 15

U10-SW02

Switch · U10

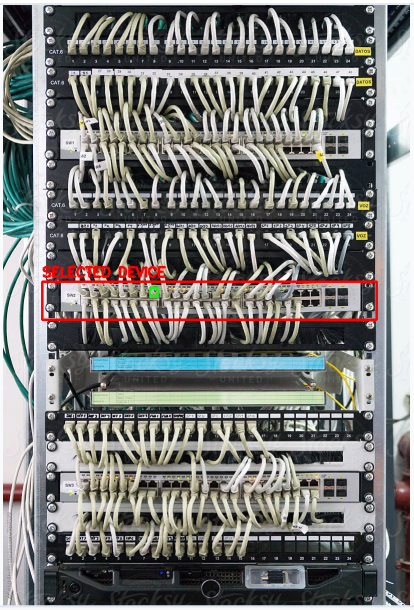



CONSOLE · 192.168.1.13 · 1/0/15

MANUAL show mac address-table interface gigabitEthernet 1/0/15

```
MAC Address Table
-------------------------------------------------------------
MAC                VLAN     Port      Type             Aging
---                ----     ----      ----             -----
e8:cf:83:3d:e0:e7  1        Gi1/0/15 dynamic          aging

Total MAC Addresses for this criterion: 1
```

MANUAL show interface status

```
Port       Status       Speed     Duplex    FlowCtrl    Active-Medium   Description
 ----       ------       -----     ------    --------    -------------   -----------
 Gi1/0/1    LinkDown     N/A       N/A       N/A         Copper
 Gi1/0/2    LinkUp       1000M     Full      Disable     Copper
 Gi1/0/3    LinkDown     N/A       N/A       N/A         Copper
 Gi1/0/4    LinkUp       1000M     Full      Disable     Copper
 Gi1/0/5    LinkUp       1000M     Full      Disable     Copper
 Gi1/0/6    LinkUp       1000M     Full      Disable     Copper
 Gi1/0/7    LinkDown     N/A       N/A       N/A         Copper
 Gi1/0/8    LinkUp       1000M     Full      Disable     Copper
 Gi1/0/9    LinkDown     N/A       N/A       N/A         Copper
 Gi1/0/10   LinkDown     N/A       N/A       N/A         Copper
 Gi1/0/11   LinkDown     N/A       N/A       N/A         Copper
 Gi1/0/12   LinkDown     N/A       N/A       N/A         Copper
 Gi1/0/13   LinkUp       1000M     Full      Disable     Copper
 Gi1/0/14   LinkDown     N/A       N/A       N/A         Copper
 Gi1/0/15   LinkUp       1000M     Full      Disable     Copper
 Gi1/0/16   LinkUp       1000M     Full      Disable     Copper
 Gi1/0/17   LinkUp       1000M     Full      Disable     Copper
 Gi1/0/18   LinkDown     N/A       N/A       N/A         Copper
 Gi1/0/19   LinkUp       1000M     Full      Disable     Copper
```

MANUAL show interface configuration

```
Port      State       Speed     Duplex    FlowCtrl    Description
 ----      -----       -----     ------    --------    -----------
 Gi1/0/1   Enable      Auto      Auto      Disable
 Gi1/0/2   Enable      Auto      Auto      Disable
 Gi1/0/3   Enable      Auto      Auto      Disable
 Gi1/0/4   Enable      Auto      Auto      Disable
 Gi1/0/5   Enable      Auto      Auto      Disable
 Gi1/0/6   Enable      Auto      Auto      Disable
 Gi1/0/7   Enable      Auto      Auto      Disable
 Gi1/0/8   Enable      Auto      Auto      Disable
 Gi1/0/9   Enable      Auto      Auto      Disable
 Gi1/0/10  Enable      Auto      Auto      Disable
 Gi1/0/11  Enable      Auto      Auto      Disable
 Gi1/0/12  Enable      Auto      Auto      Disable
 Gi1/0/13  Enable      Auto      Auto      Disable
 Gi1/0/14  Enable      Auto      Auto      Disable
 Gi1/0/15  Enable      Auto      Auto      Disable
 Gi1/0/16  Enable      Auto      Auto      Disable
 Gi1/0/17  Enable      Auto      Auto      Disable
 Gi1/0/18  Enable      Auto      Auto      Disable
 Gi1/0/19  Enable      Auto      Auto      Disable
 Gi1/0/20  Enable      Auto      Auto      Disable
```

MANUAL show power inline

```
System Power Limit: 250.0w
 System Power Consumption: 0.0w
 System Power Remain: 250.0w
```

MANUAL show spanning-tree interface gigabitEthernet 1/0/15

```
Interface information is not available
  Spanning tree is disabled
```

MANUAL show cable-diagnostics interface gigabitEthernet 1/0/15

```
Port        Pair      Status      Length         Error
Gi1/0/15    Pair-A    Normal      26 m           ---
            Pair-B    Normal      26 m           ---
            Pair-C    Normal      26 m           ---
            Pair-D    Normal      26 m           ---
```

MANUAL show system-info

```
System Description   - JetStream 28-Port Gigabit Smart Switch with 24-Port PoE+
 System Name          - TL-SG2428P
 System Location      - Hong Kong
 Contact Information  - www.tp-link.com
```

```
Hardware Version     - TL-SG2428P 5.0
Software Version     - 5.0.2 Build 20220909 Rel.75392
Bootloader Version   - TP-LINK  BOOTUTIL(v1.0.0)
Mac Address          - 30-DE-4B-23-70-AC
Serial Number        - 222B0K4000121
System Time          - 2026-04-24 17:07:58
Running Time         - 65 day - 22 hour - 40 min - 36 sec
```