


DANGER 230 VAC

KEEP 8 mm CLEAR

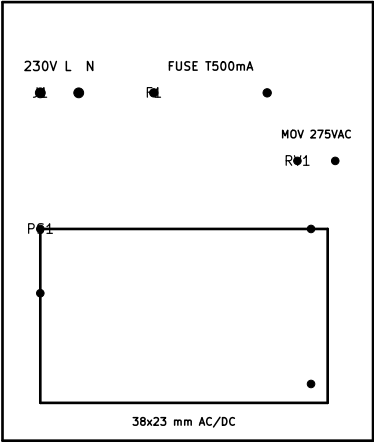

NO COPPER / 8mm ISOLATION

1000uF >=6.3V

RFM95W / 2mm ADAPTER

WIZ8501o SOCKET

NANO ESP32

SIM7600G-H HAT

SW1
HOLD: AP / RESTART

T1
NTC 10K + R 10K

IN1 IN2 IN3 GND

XY-485: GND RXD TXD VCC
F,Cu traces require Insulated Jumpers or double-sided PCB
3V3 LOGIC ONLY | GSM: SEPARATE 5V/3A
NANO ESP32 MODULAR GATEWAY REV A

U5

GSM 5V >=3A