



## Power input

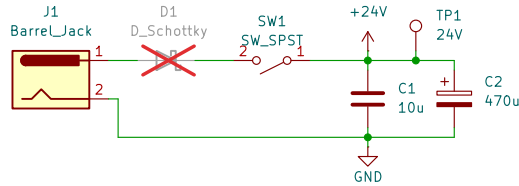


Note: External (not on board) barrel jack and switch are used. D1 can be used for a diode for RPP, thermistor for inrush current limiting, for a fuse, or simply jumpered closed.


## Fan Option




## TTL Oscillator

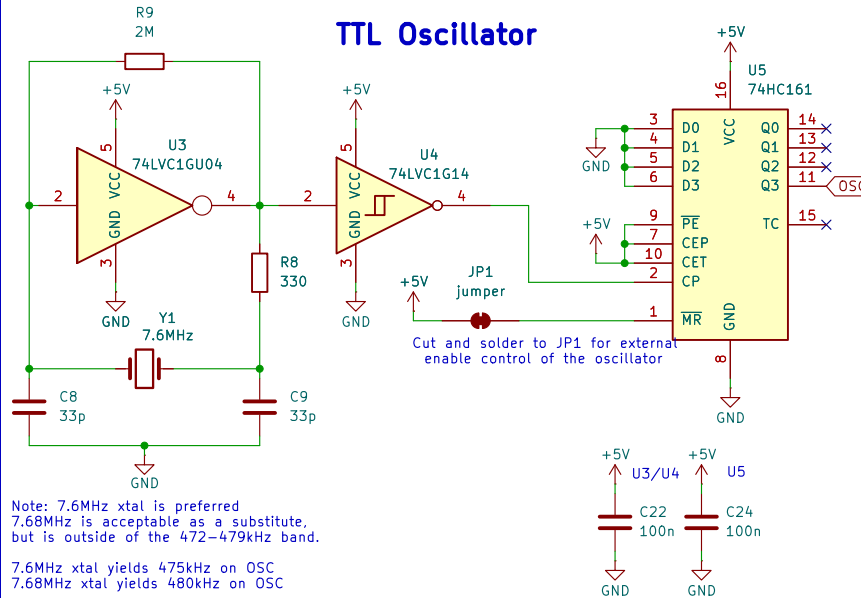


## Misc Hardware

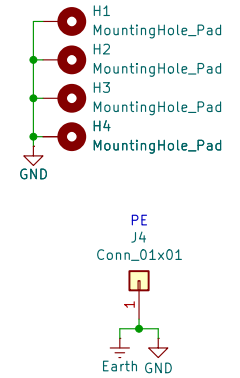


## DC Regulation

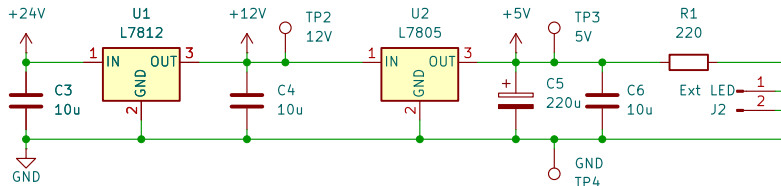

## Gate driver

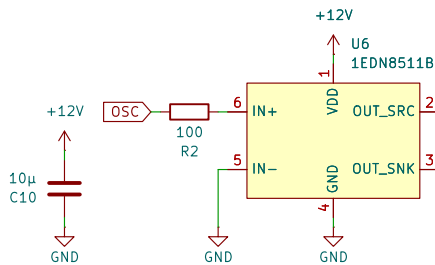

## RF section

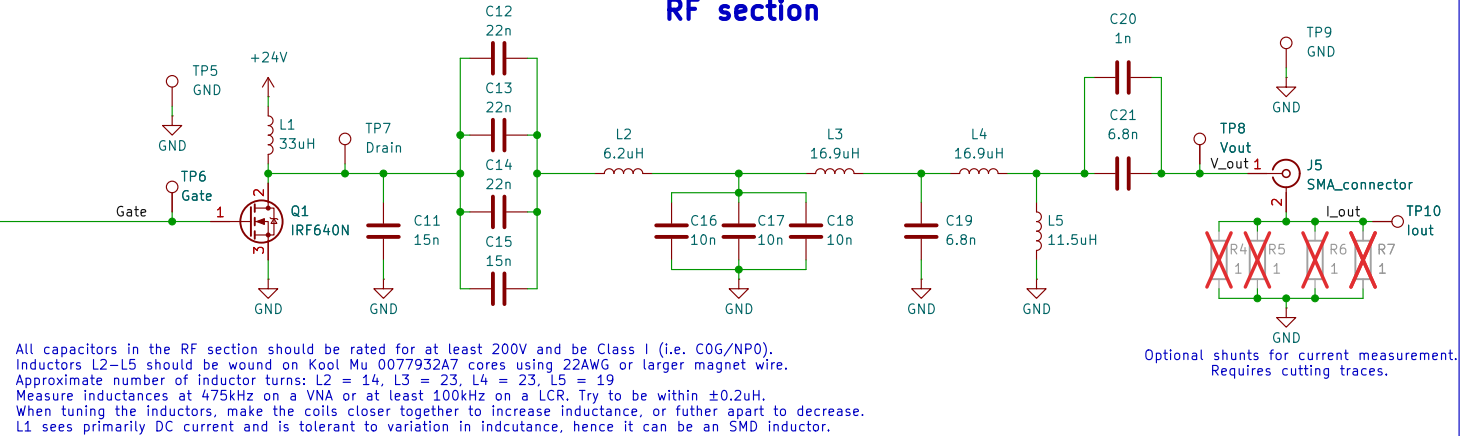

## General Notes

- 10 $\mu\text{F}$  capacitors outside of the RF section can be Class II MLCCs (X5R or X7R).
- 10 $\mu\text{F}$  is the specified capacitance at 0V DC. It is fine for the capacitance with applied DC voltage to be under 10 $\mu\text{F}$ .
- Oscillator frequency should ideally be within the 472–479kHz band, centered on 475kHz.

**RadioThermal**  
Soldering Solutions

Sheet: /  
File: pcb\_v2–5.kicad\_sch

**Title: RTSS 470kHz Power Supply**

Size: A4 Date: 2026–09–03  
KiCad E.D.A. 10.0.1

Rev: 2.5B  
Id: 1/1