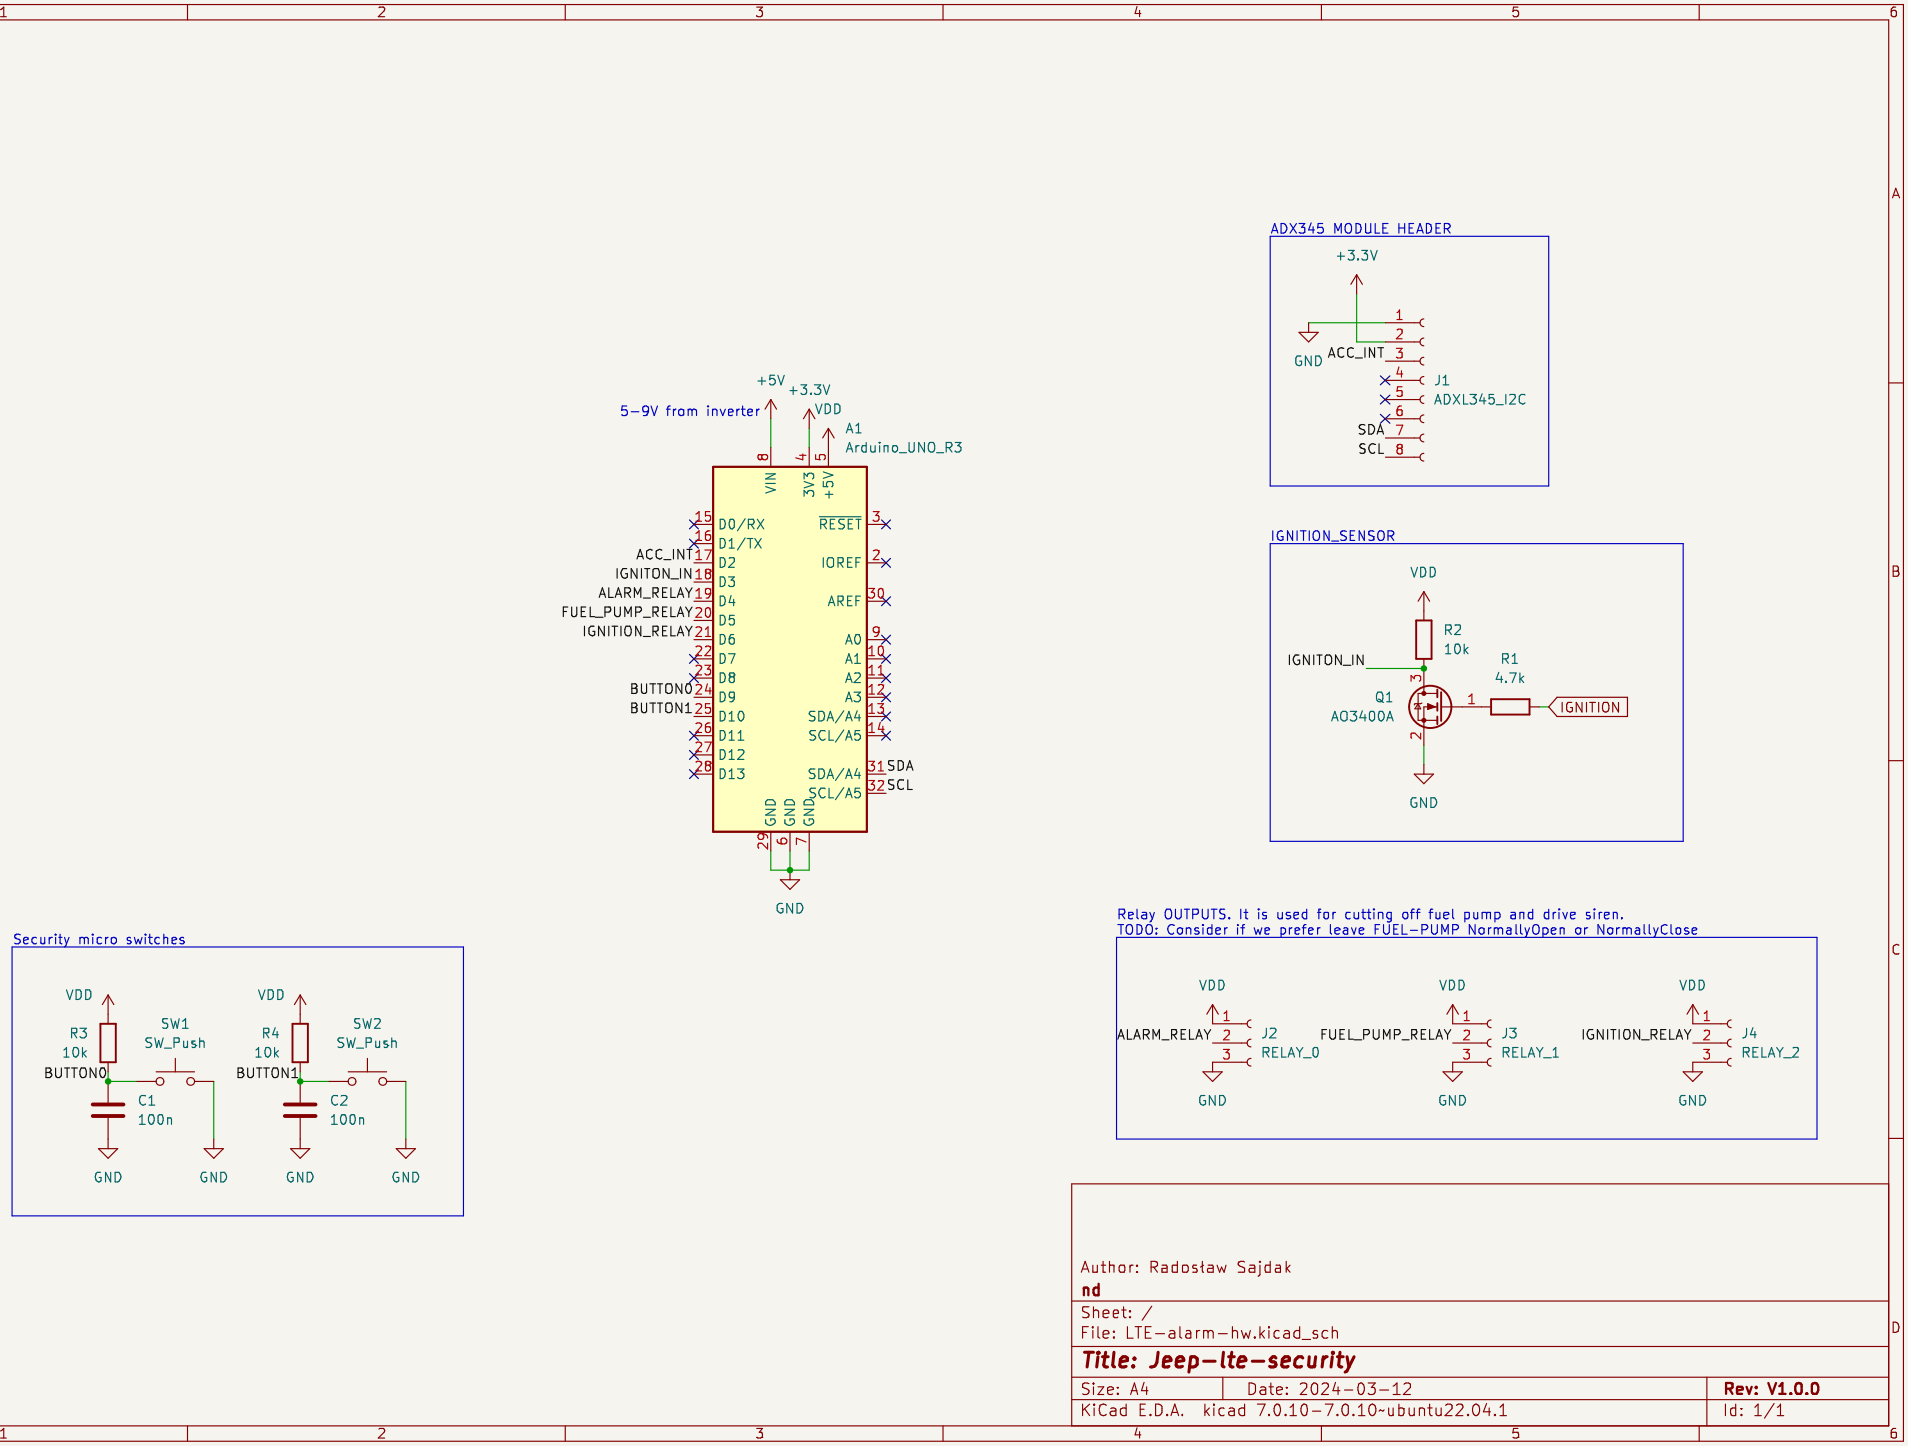
ADX345 MODULE HEADER
+3.3V
GND
ACC_INT
J1
ADXL345_I2C
SDA
SCL
IGNITION_SENSOR
VDD
R2
10k
IGNITON_IN
R1
4.7k
Q1
AO3400A
IGNITION
GND
+5V
+3.3V
5-9V from inverter
VDD
A1
Arduino_UNO_R3
VIN
3V3
+5V
D0/RX
D1/TX
D2
D3
D4
D5
D6
D7
D8
D9
D10
D11
D12
D13
RESET
IOREF
AREF
A0
A1
A2
A3
SDA/A4
SCL/A5
ACC_INT
IGNITON_IN
ALARM_RELAY
FUEL_PUMP_RELAY
IGNITION_RELAY
BUTTON0
BUTTON1
SDA
SCL
GND
Relay OUTPUTS. It is used for cutting off fuel pump and drive siren.
TODO: Consider if we prefer leave FUEL-PUMP NormallyOpen or NormallyClose
ALARM_RELAY
J2
RELAY_0
FUEL_PUMP_RELAY
J3
RELAY_1
IGNITION_RELAY
J4
RELAY_2
Security micro switches
R3
10k
SW1
SW_Push
C1
100n
R4
10k
SW2
SW_Push
C2
100n
Author: Radosław Sajdak
nd
Sheet: /
File: LTE-alarm-hw.kicad_sch
Title: Jeep-lte-security
Size: A4
Date: 2024-03-12
Rev: V1.0.0
KiCad E.D.A. kicad 7.0.10-7.0.10~ubuntu22.04.1
Id: 1/1