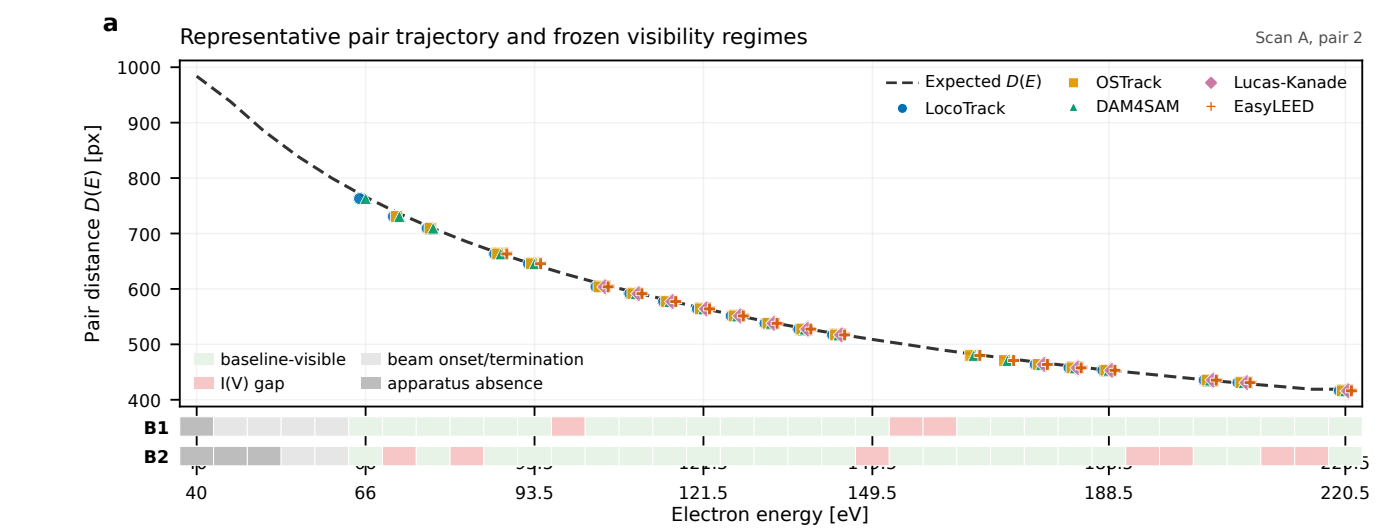

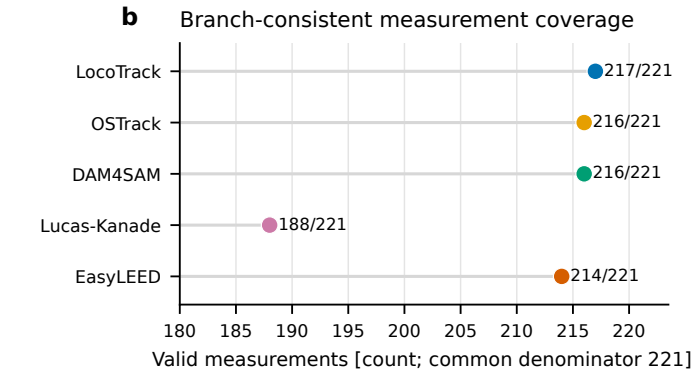

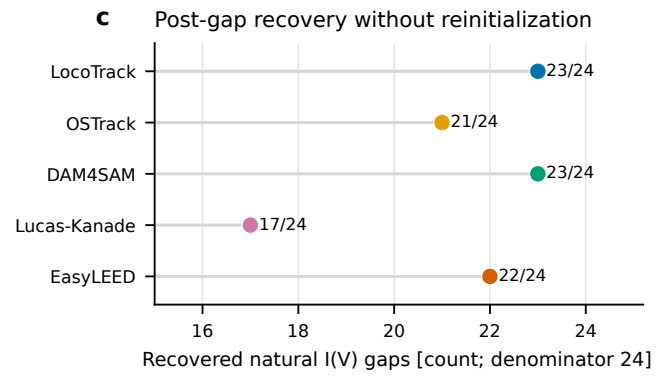

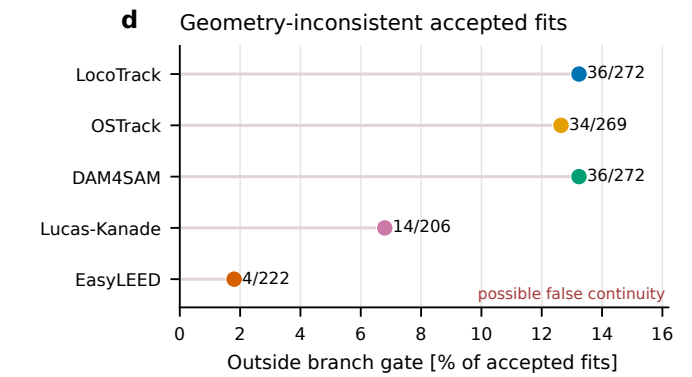

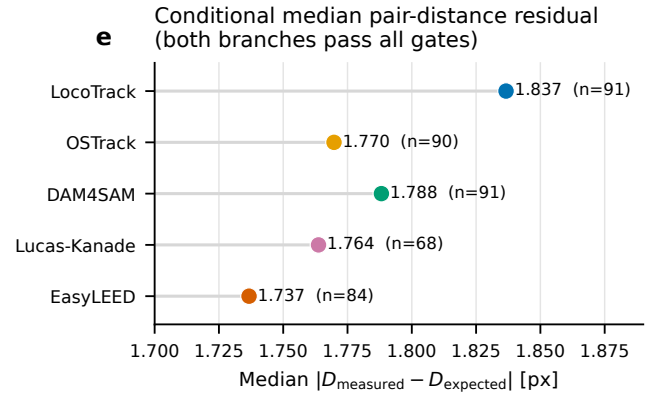

f External domain reference - separate initialization and denominator

Different native initialization

EasyLEED
one Kalman tracker per frozen spot

ViPErLEED
registered 18-beam
whole-pattern trajectory

Same downstream measurement

Valid Gaussian fits **38/60 both**

Gap checks **4/4 both**
Conditional median |D residual| [px]
P1: 0.462 / 0.460; P2: 0.762 / 0.760

Cross-method separation

0.626 px native proposals → common fit **0.000986 px** Gaussian centers

maximum: 1.696 -> 0.0240 px

Restricted 15-image interval; ViPErLEED is not a sixth method and is not position ground truth.