EasyLEED–ViPErLEED compatibility under the common Gaussian estimator

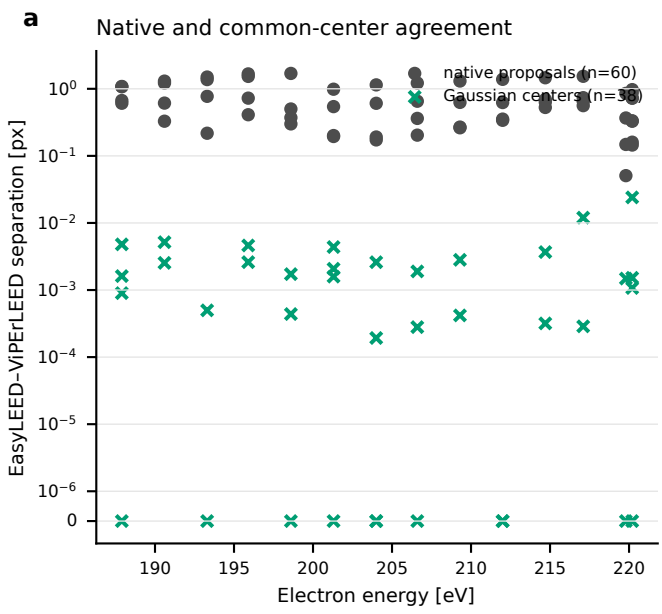

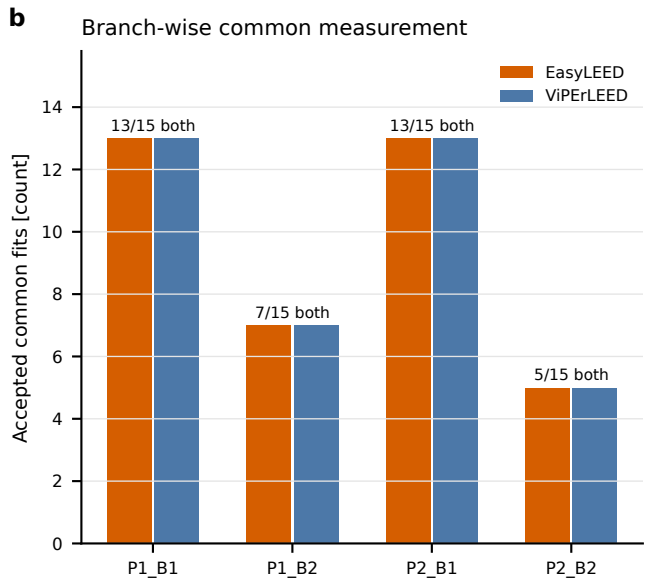

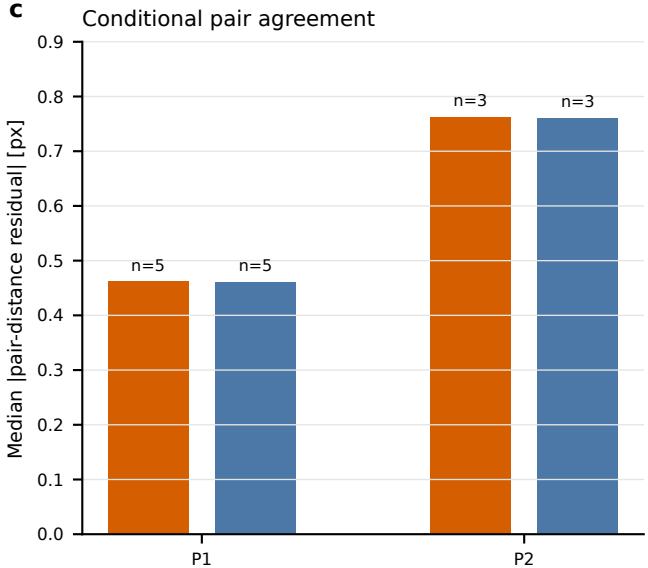

d

Compatibility scope

Separate external-reference contract

EasyLEED: one Kalman tracker per spot
ViPErLEED: registered 18-beam whole pattern

60 branch opportunities per method
38/60 accepted common fits per method
4/4 frozen gap checks per method

Median separation: 0.626 px native
→ 0.000986 px after common fit

Not a sixth main-matrix method.
Not position ground truth.