

Darpet

Stock Door Closers

Applications

- Heavy Duty Commercial model, ideal for high traffic door
- Versatile for new constructions, such as schools, hospitals, and public institutions
- Universal mounting hole pattern
- Size 4: CTC 9-1/16" x 3/4"
- Tri-packed for all type applications
- Sex-bolts included for Metal Door mounting



(Darpet item # 604410-4400 SERIES)

Product Specification

Material	Aluminum alloy body, forged steel arm Heat treated forged steel piston Double Heat treated Steel pinion
Cover	Full plastic cover – standard
Valves	Triple valve control for Closing speed, Latching speed, and Back-check Staked valve for power adjustment
Arm & Brackets	Standard arm and parallel bracket included for different mounting demand
Screws	Self-tapping wood screws, machine screws, and sex-bolts
Finishes	Aluminum

Features

- Multi-size spring adjustable power size 1-4, factory preset size 3
- 4400 meets ADA, Barrier Free interior
- Standard with adjustable Backcheck

Technical Dimensions


Series 4400	Size
A. Length of Closer Body	9-3/4"
B. Horizontal Mounting Holes	9-1/16"
C. Vertical Mounting Holes	3/4"
D. Height of Closer Body	1-3/4"
E. Projection from Door	2-7/8"

End View

Front View

DOOR CLOSER APPLICATION

There are three basic methods of mounting surface door closers to the door and frame including regular arm, parallel arm and top jamb mounts. All door closers are supplied standard with a tri-pack for mounting any of three types applications.

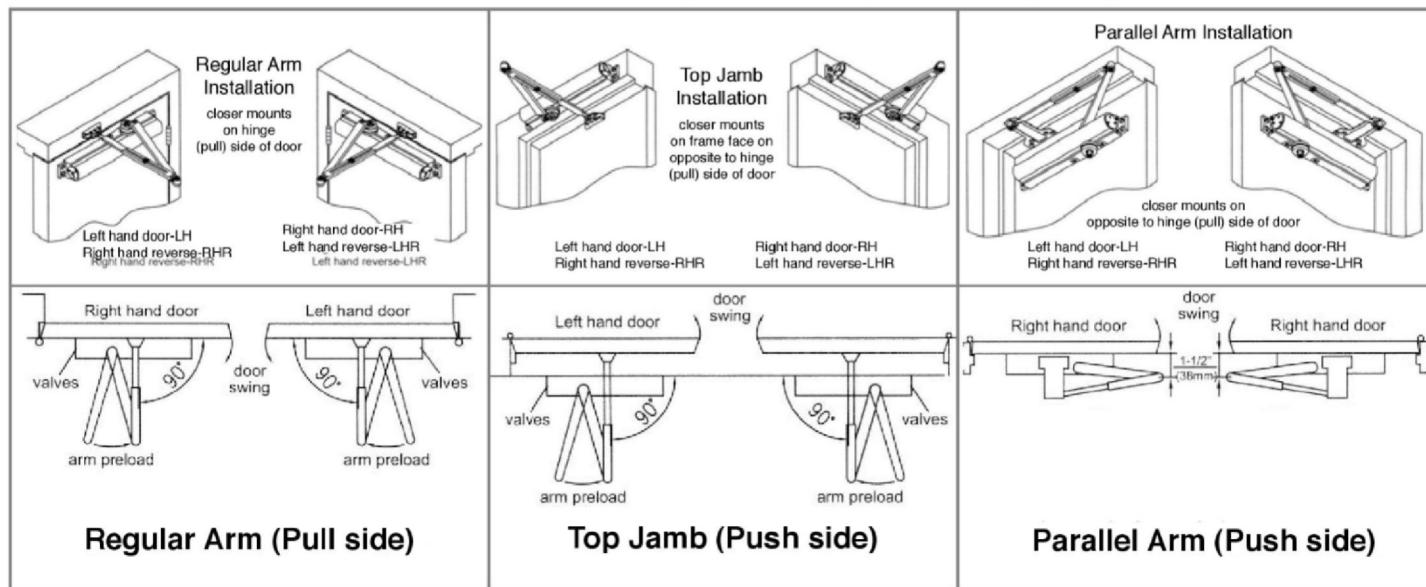

ANSI GRADE 1

ANSI/BHMA A156.4

Series 2000, PT1

Exceeds 1,500,000 cycles with Backcheck



UL10C Positive Pressure
Rated. Conforms to UBC
7-2 (1997). (Uniform
Building Code Standard)
LISTED

4400 Series
Comply with
ANSI A117.1



25-Year Warranty