

Darpet

10-Year Warranty

ANSI GRADE 1

ANSI/BHMA A156.3-2001

Type 1 & Type 2

Exceeds 500,000 Cycles



LISTED

UL Listed for "A" Label Doors

Rated Up to 3 Hours

UL10C Positive Pressure Rated

Conforms to UBC 7-2 (1997)

UL305 Listed for Panic Hardware

UL10B Neutral Pressure Rated



Comply with
ANSI117.1 for
accessible and
usable Buildings
and Facilities
Standards



(Darpet item # 693100-F7000-36)
Aluminum

SPECIFICATIONS

CERTIFICATIONS

- ANSI Grade 1 approved, exceeds 500,000 cycles.
- UL305 Listed for Panic Hardware.
- UL Listed for up to 3hrs on "A" label Fire Doors.
- UL10B Neutral Pressure rated.
- UL10C/UBC7-2(1997) Positive Pressure rated.
- Comply with ANSI117.1 for accessible and usable Buildings and Facilities Standards.

DOOR FITTING

- 1-3/4" thick standard.
- Rim – 4-1/2" min. stile width for Single Door and 5/8" stop.
- Mounting Height – 41" from CL to finished floor.

DOOR WIDTH

- 36", rail can be cut from the end to fit door size down to 30".

DOOR HEIGHT

- 84" (7') - Standard with 36" Door width.
- 96" (8') - Standard with 48" Door width.

STRUCTURE



- Head Cover – Plated Zinc Alloy.
- Chassis – Steel or Stainless Steel.
- End Cap – Plated Zinc Alloy.
- Rail Assembly – Heavy Gauge Steel or Stainless Steel.

LATCH BOLT

- Rim – 3/4" throw.
Automatic dead-latching by pressing down the Guard Bolt.

Minimum Stile Requirements

Single Door

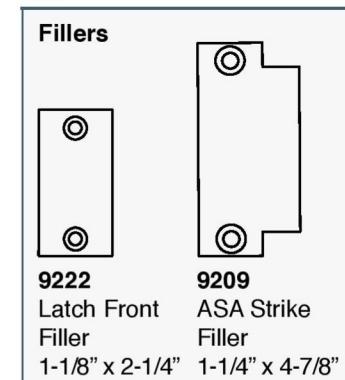

Outside Trim

(Darpet item # 699112-500L)

LEVER TRIM

- Non handed
- Standard for 1-3/4" – 2" door thick.
- Finishes - US26D and US10B.

500L - Entrance

Key retracts latch bolt, unlocks lever.

ANSI function - 08

