


Experiment - 11

Simulate Static Routing Configuration using Cisco Packet Tracer.

a) AIM: Static Routing Configuration
To Simulate Static Routing Configuration using Cisco Packet Tracer, understand how to manually add, verify and manage Static routes in a network.

Procedure:-


- 1) open Cisco Packet Tracer, create a 3 routers (R0, R1, R2) with PCs.
- 2) Connect Routers and PCs using Proper cables.
- 3) Assign IP Address to all interfaces based on the given network tables.
- 4) Configure Static routes on each router for network not directly connected.
- 5) Verify routing table to check main and backup router.
- 6) Test connectivity using Ping & tracer between PCs.
- 7) Simulate link failure by removing a connection and check backup route.
- 8) Delete Static route if needed using router CLI.

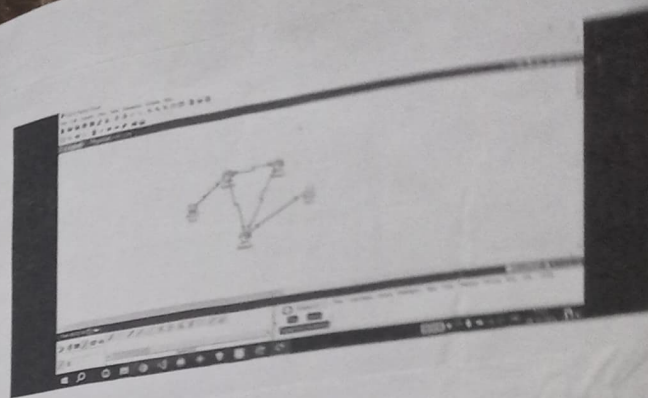

b) AIM: RIP Configuration
To Simulate routing information Protocol (RIP) using Cisco Packet Tracer & understand how routes automatically share routing information within a network.

Procedure:

- 1) Create a network using 3 routers (R0, R1, R2) & 2 PCs.
- 2) Connect all devices & Assign IP addresses as per table.
- 3) Enable all interfaces of routers.
- 4) Enable RIP Protocol on all routers & add network address.
- 5) Check routing table entries learned through RIP.
- 6) Verify network connectivity using Ping between PCs.

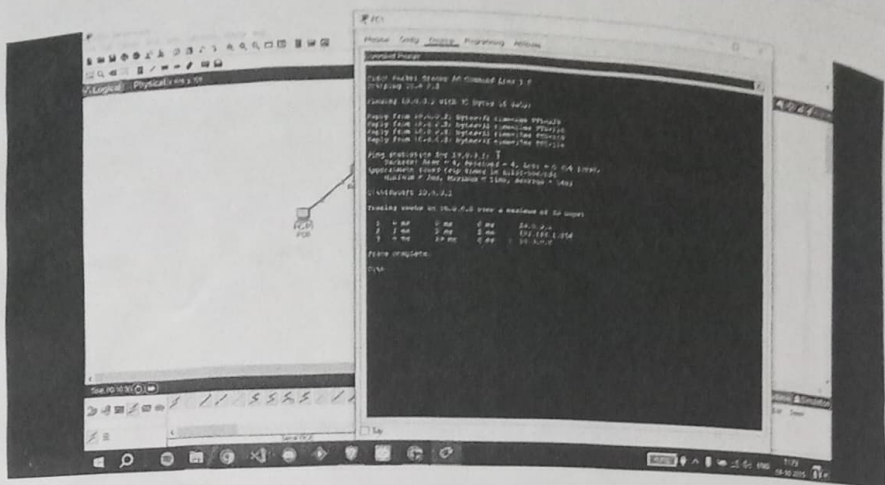

Result :

Simulate Static Routing configuration using Cisco Packet Tracer successfully.