

TRACER

Do Experiment on CISCO PACKET

Aim:

To Study the packet tracer tool installed and user Interface overview.

To download our tracer, go to <https://www.netacad.com> and log in with your cisco networking Academy credentials the package for your operating System.

Windows:

Installation in windows is pretty simple and straightforward then setup comes in a single file named packet tracer Setup.exe, open this to begin the setup wizard, accept all licenses agreement, choose location and start installation.

Linux:

Linux user with any Ubuntu/Debian distribution should download the file for Ubuntu and those using fedora/RHEL/CentOS must download the file for fedora then use PacketTracer - installer - rpm.linux

PacketTracer - 1886 - installer - rpm.linux

Analyse the behaviour of network device using CISCO PACKET TRACER Simulator.

1. From the network component box, click and drag - drop the below components:

- 4 Generic PCs and one HUB
- 4 Generic PCs and one Switch

2. Click on connections

- Click on copper straight-through cable
- Select one of the PC and connect it to HUB using the cable the link LED should glow in green, indication that link is up.

Similarly connect remaining 3 PCs to the HUB.

3. Similarly connect 4 PCs to the switch using copper straight-through cable.


3. Click on the PCs connected to hub, go to the desktop tab, click on IP configuration and enter an IP address and Subnet mask. Here the default gateway and DNS Server information is not needed as there are only two devices in network.

Click on the POV (message icon) from common tool bar and drag and drop it on one of PC and then drop it on another PC connected to HUB.

4. Observe the flow of POV from Source PC to Destination PC by selecting the Realtime mode of simulation.

5. Repeat Setup #3 to Step #5 for the PC's connected to the switch.

6. Observe how Hub and Switch are forwarding the PDU and write your observation and conclusion about behaviours of Switch and HUB.

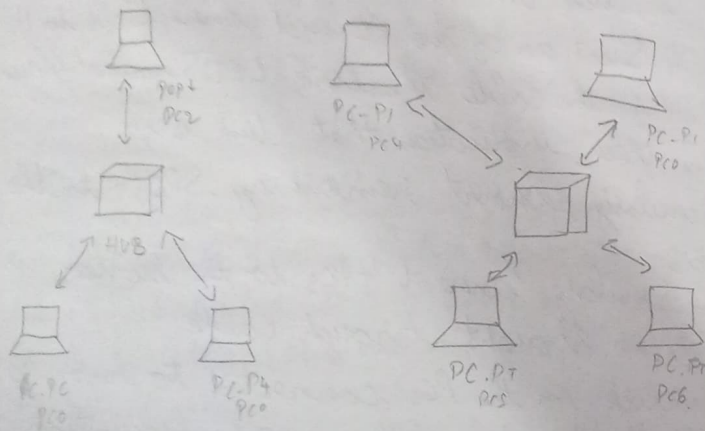

Student observation :

1. From your observation write down the behavior of switch and HUB in terms of forwarding packets received by them.

* Switch forwards packet only to the specific port of the device where the address matches the destination address, reducing unnecessary traffic.

* A HUB broadcasts packet to all connected devices regardless of the destination leading to more network collision.

Result:

The study of Packet Tracer tool interface and user interface overview is done successfully.