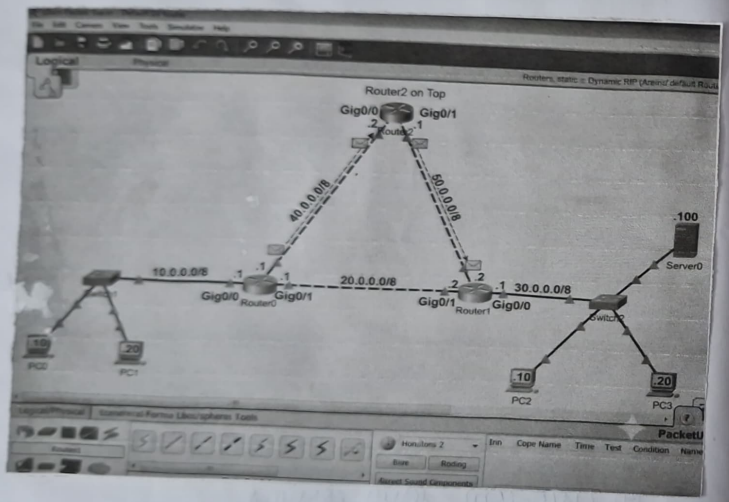


EXP-11 Routing a network layer.

- Aim :
  - Simulate Static Routing config with primary and backup routes using Cisco packet tracer.
  - Simulate routing info protocol dynamic routing using Cisco
- Procedure :
- Part A :
  1. Build topology : Place 3 routers, 2 switches and end devices
  2. Assign IP address : Configure IP address and bring interfaces up.
  3. Configure primary and backup routes
  4. Verification & failover.
- Part B
  1. Build topology
  2. Configure Router interfaces.
  3. Enable RIP & advertise connected networks
  4. Verification of dynamic routing
- Result :

Static routing (including primary/floating backup routes) and RIP dynamic routing were successfully configured and verified using Cisco packet tracer.