

Institute of Software Technology  
Reliable Software Systems

University of Stuttgart  
Universitätsstraße 38  
D-70569 Stuttgart

Masterarbeit

## **Space Component Model using DLR Software Technologies**

Raghuraj Tarikere Phaniraja Setty

**Course of Study:** Softwaretechnik

**Examiner:** Dr.-Ing. André van Hoorn (Prof.-Vertr.)

**Supervisor:** Dr. Dušan Okanović,  
Teerat Pitakrat, M.Sc.

**Commenced:** October 2, 2017

**Completed:** April 2, 2018

**CR-Classification:** I.7.2



## **Abstract**

... Short summary of the thesis in English ...



## Kurzfassung

... Short summary of the thesis in German ...



# Contents

---

|  |    |
|--|----|
| 1. Introduction  | 1  |
| 2. The On-board Software Reference Architecture (OSRA)                     | 3  |
| 2.1. Introduction . . . . .  | 3  |
| 2.2. Need for software reference architecture . . . . .                    | 4  |
| 2.3. The Software Architectural Concept . . . . .                          | 10 |
| 3. Overall component-based software development process                    | 21 |
| 3.1. Introduction . . . . .  | 21 |
| 3.2. Design entities and design steps . . . . .                            | 21 |
| 3.3. Design flow and design views . . . . .                                | 29 |
| 3.4. Language units of the OSRA . . . . .                                  | 30 |
| 3.5. OSRA SCM Model Editor . . . . .                                       | 32 |
| 4. Tasking Framework   | 35 |
| 4.1. Introduction . . . . .  | 35 |
| 4.2. Usage of Tasking Framework . . . . .                                  | 36 |
| 4.3. Use cases for Tasking Framework . . . . .                             | 38 |
| 4.4. Use of Tasking Framework in this Master thesis . . . . .              | 38 |
| 5. A programming model for OSRA  | 41 |
| 5.1. Introduction . . . . .  | 41 |
| 5.2. Structure of the code archetypes . . . . .                            | 43 |
| 6. Infrastructural code generation   | 53 |
| 6.1. Introduction . . . . .  | 53 |
| 6.2. User model entities in the Platform Independent Model (PIM) phase . . | 53 |
| 6.3. Mapping of design entities to the infrastructural code . . . . .      | 55 |
| 6.4. Code generation using Xtend . . . . .                                 | 83 |

|       |  |     |
|-------|--|-----|
| 7.    | Evaluation of the code generator   | 87  |
| 7.1.  | Introduction . . . . .   | 87  |
| 7.2.  | Selection and evaluation methods of a MDE tool for code generation . . . . . | 88  |
| 8.    | Conclusion   | 93  |
| A.    | LaTeX-Tipps  | 95  |
| A.1.  | File-Encoding und Unterstützung von Umlauten . . . . .                       | 95  |
| A.2.  | Zitate . . . . .   | 95  |
| A.3.  | Mathematische Formeln . . . . .  | 96  |
| A.4.  | Quellcode . . . . .  | 96  |
| A.5.  | Abbildungen . . . . .  | 96  |
| A.6.  | Tabellen . . . . .   | 97  |
| A.7.  | Pseudocode . . . . .   | 97  |
| A.8.  | Abkürzungen . . . . .  | 101 |
| A.9.  | Verweise . . . . .   | 101 |
| A.10. | Definitionen . . . . .   | 102 |
| A.11. | Verschiedenes . . . . .  | 102 |
| A.12. | Weitere Illustrationen . . . . .   | 102 |
| A.13. | Schlusswort . . . . .  | 106 |
|       | Bibliography   | 107 |

# List of Figures

---

|  |    |
|--|----|
| 2.1. Parts of a software reference architecture . . . . .  | 5  |
| 2.2. Reduction in the schedule for software development . . . . .  | 7  |
| 2.3. The four constituents of the software reference architecture . . . . .  | 11 |
| 2.4. Example for composability . . . . .   | 15 |
| 2.5. Example for compositionality . . . . .  | 15 |
| 2.6. Components, containers and a connector connecting them . . . . .  | 17 |
|  |    |
| 3.1. Data types, events and interfaces . . . . .   | 23 |
| 3.2. Component type . . . . .  | 23 |
| 3.3. Component Implementation . . . . .  | 24 |
| 3.4. Component instance, component bindings and decoration with non-functional attributes . . . . .                          | 26 |
| 3.5. Generation of SAM and model-code transformation . . . . .   | 28 |
| 3.6. Automated generation of containers and connectors . . . . .   | 29 |
| 3.7. The overall design flow . . . . .   | 30 |
| 3.8. Implementation of OSRA component model in the reference implementation  | 31 |
| 3.9. Screenshot of the OSRA SCM model editor . . . . .   | 32 |
|  |    |
| 4.1. Order and timing of computation tasks in BIRD and TET-1 vs order and timing of computation tasks in Eu:CROPIS . . . . . | 36 |
|  |    |
| 5.1. Synchronous release pattern . . . . .   | 44 |
| 5.2. Thread of control for asynchronous sporadic release pattern . . . . .   | 47 |
| 5.3. Thread of control for asynchronous protected release pattern . . . . .  | 48 |
| 5.4. Thread of control for asynchronous bursty release pattern . . . . .   | 50 |
| 5.5. Thread of control for asynchronous cyclic release pattern . . . . .   | 51 |
|  |    |
| 6.1. Data types, events, exceptions and interfaces diagram . . . . .   | 57 |
| 6.2. Component types diagram . . . . .   | 58 |
| 6.3. Component instances diagram . . . . .   | 59 |
| 6.4. Hardware topology diagram . . . . .   | 61 |

|   |    |
|---|----|
| 6.5. UML class diagram representation for exceptions in the example OBSW model . . . . .  | 62 |
| 6.6. UML class diagram representation for event in the example OBSW model . . . . .   | 63 |
| 6.7. UML class diagram representation for interfaces in the example OBSW model . . . . .  | 64 |
| 6.8. UML class diagram representation for interface helpers in the example OBSW model . . . . .   | 65 |
| 6.9. UML class diagram representation of data structures for interface operation and interface attribute in the example OBSW model . . . . .  | 67 |
| 6.10. UML class diagram representation of parameter channel and parameter queue in the example OBSW model . . . . .   | 67 |
| 6.11. UML class diagram representation of event emitter port in the example OBSW model . . . . .  | 68 |
| 6.12. UML class diagram representation of event receiver port in the example OBSW model . . . . .   | 68 |
| 6.13. UML class diagram representation of component type for Component_Caller in the example OBSW model . . . . .   | 70 |
| 6.14. UML class diagram representation of component type for Component_Callee in the example OBSW model . . . . .   | 70 |
| 6.15. UML class diagram representation of RequiredInterfacePortType1 for Component_Caller in the example OBSW model . . . . .   | 73 |
| 6.16. UML class diagram representation of RequiredInterfacePortType2 for Component_Caller in the example OBSW model . . . . .   | 73 |
| 6.17. Code excerpt from the generated code for interface attribute StatusValue access in RequiredInterfacePortType2 . . . . .   | 75 |
| 6.18. Code excerpt from the generated code for interface attribute StatusValue access in RequiredInterfacePortType2 . . . . .   | 76 |
| 6.19. UML class diagram representation of ProvidedInterfacePort1 for Component_Callee in the example OBSW model . . . . .   | 77 |
| 6.20. UML class diagram representation of ProvidedInterfacePort2 for Component_Callee in the example OBSW model . . . . .   | 77 |
| 6.21. UML class diagram representation of ProvidedInterfacePort for Component_Caller in the example OBSW model . . . . .  | 78 |
| 6.22. UML class diagram representation of the task required to call CallOperationAdd in ProvidedInterfacePort periodidcally with a period of 2s in the example OBSW model . . . . . | 81 |
| 6.23. UML class diagram representation of the task required to call OperationAdd in ProvidedInterfacePort2 sporadically with a MIAT of 2s in the example OBSW model . . . . .       | 82 |

|   |     |
|---|-----|
| 6.24.UML class diagram representation of the tasks required to set and get the values of the interface attributes asynchronously in <code>ProvidedInterface</code> <code>Port2</code> in the example OBSW model . . . . . | 83  |
| 6.25.UML class diagram representation of the task required for the reception of the <code>FailureEvent</code> in the example OBSW model . . . . .   | 84  |
| 6.26.UML class diagram representation of the container for <code>Component_Caller</code> in the example OBSW model . . . . .  | 84  |
| 6.27.UML class diagram representation of the container for <code>Component_Callee</code> in the example OBSW model . . . . .  | 85  |
| <br>  |     |
| A.1. Beispiel-Choreographie . . . . .   | 97  |
| A.2. Beispiel-Choreographie . . . . .   | 98  |
| A.3. Beispiel um 3 Abbildung nebeneinader zu stellen nur jedes einzeln referenzieren zu können. Abbildung A.3b ist die mittlere Abbildung. . . . .  | 98  |
| A.4. Beispiel-Choreographie I . . . . .   | 103 |
| A.5. Beispiel-Choreographie II . . . . .  | 104 |
| A.6. Beispiel-Choreographie, auf einer weißen Seite gezeigt wird und über die definierten Seitenränder herausragt . . . . .   | 105 |



# List of Tables

---

|      |   |    |
|------|---|----|
| 6.1. | Desired interaction kind for operations in the required interface ports . . . . .   | 57 |
| 6.2. | Non-functional property for the operation in the provided interface slot . .  | 59 |
| 6.3. | Non-functional properties for the operations in the provided interface slots  | 60 |
| 6.4. | Non-functional property for event reception . . . . .   | 60 |
| 7.1. | My caption . . . . .  | 90 |
| 7.2. | My caption . . . . .  | 91 |
| A.1. | Beispieldabelle . . . . .   | 99 |
| A.2. | Beispieldabelle für 4 Bedingungen (W-Z) mit jeweils 4 Parameters mit (M und SD). Hinweiß: immer die selbe anzahl an Nachkommastellen angeben. | 99 |



# List of Acronyms

---

**FR** Fehlerrate



# List of Listings

---

|      |  |    |
|------|--|----|
| 6.1. | Code excerpt from the generated code for InterfaceA_Helper . . . . .   | 65 |
| 6.2. | Code excerpt from the generated code for requesting service OperationAdd<br>in RequiredInterfacePortType1 . . . . .  | 71 |
| 6.3. | Code excerpt from the generated code for interface attribute StatusValue<br>access in RequiredInterfacePortType2 . . . . .   | 72 |
| 6.4. | Code excerpt from the generated code for operation OperationAdd ac-<br>cess in ProvidedInterfacePort1 which is called synchronously and has<br>Protected as a non-functional property attached to it . . . . . | 78 |
| 6.5. | Code excerpt from the generated code for operation OperationAdd access<br>in ProvidedInterfacePort2 which is called asynchronously . . . . .   | 79 |
| 6.6. | Code excerpt from the generated code for operation CallOperationAdd<br>in ProvidedInterfacePort which has non-functional property set as Cyclic  | 79 |
| A.1. | Istlisting in einer Listings-Umgebung, damit das Listing durch Balken<br>abgetrennt ist . . . . .  | 96 |



# List of Algorithms

---

|                                 |     |
|---------------------------------|-----|
| A.1. Sample algorithm . . . . . | 100 |
| A.2. Description . . . . .      | 101 |



## Chapter 1

# Introduction

---

In diesem Kapitels steht die Einleitung zu dieser Arbeit. Sie soll nur als Beispiel dienen und hat nichts mit dem Buch [WSPA ] [AS10] zu tun. Nun viel Erfolg bei der Arbeit!

Bei  $\text{\LaTeX}$  werden Absätze durch freie Zeilen angegeben. Da die Arbeit über ein Versionskontrollsystem versioniert wird, ist es sinnvoll, pro *Satz* eine neue Zeile im .tex-Dokument anzufangen. So kann einfacher ein Vergleich von Versionsständen vorgenommen werden.

## Thesis Structure

Die Arbeit ist in folgender Weise gegliedert:

**Kapitel ?? – ??:** Hier werden die Grundlagen dieser Arbeit beschrieben.

**Kapitel 8 – Conclusion** fasst die Ergebnisse der Arbeit zusammen und stellt Anknüpfungspunkte vor.



## Chapter 2

# The On-board Software Reference Architecture (OSRA)

---

### 2.1. Introduction

#### 2.1.1. Background

Space industry has recognized for the past decade the need to raise the level of standardization in the avionics system in order to increase the efficiency and reduce cost and schedule in the development [AS10]. The implementation of such a vision is expected to provide benefits for all the stake-holders in the space community [AS10].

**Customer Agencies** Significant reduction in the project development cost and schedule and the risk involved in the software development

**System Integrators** Increased competition among stake-holders to deliver at lower price and maintain shorter time-to-market as a result of multi-supplier option

**Supplier Industry** Benefits from diversified customer bases and the supplied building blocks would be compatible with software architectures from the software primes such as Thales Alenia Space and astrium Satellites (EADS Astrium)

Similar initiatives have already been taken across various industries and eg. AUTOSAR (AUTomotive Open System ARchitecture) for the automotive industry is worthy mentioning [HG10]. Space can benefit from these examples by studies related to how these or similar initiatives were successfully conducted and how they fared. Although the business model is different in the automotive and the space sectors, AUTOSAR demonstrates that the need for standardization is the key irrespective of the sector and is driven by the need of the industry to become more competitive [SF11]

## 2. The On-board Software Reference Architecture (OSRA)

---

Space primes and on-board software companies have made significant progress and have implemented and/or are implementing reuse on the basis of their internal software reference architectures and building blocks. However, for this standardization to provide maximum benefits, it has to be tackled at the European level rather than at company level [AS10]

ESA through its two parallel activities, namely COrDeT and DOMENG [RFA+12] aimed at increasing the software reuse in on-board software have confirmed that interface standardization allows to efficiently compose the software on the basis of existing and mature building blocks.

To refer to all ongoing initiatives and to provide a platform for technical discussions, related to the vision of avionics development through maximizing reuse and standardization, a "Space Avionics Open Interface Architecture" Advisory Group (SAVOIR Advisory Group) was created. SAVIOR Advisory Group decided to spawn a specific subgroup for on-board software reference architectures called "SAVOIR Fair Architecture and Interface Reference Elaboration"(SAVOIR FAIRE) working group. OSRA is the result of the R&D activities of this group [AS10].

The On-board software reference architecture (OSRA) is designed to be a single, common and agreed framework for the definition of the on-board software (OBSW) of the future European Space Agency (ESA) missions [AS10]. It is based on solid scientific foundations and accompanied by development methodology and architectural practices that fit the domain. A single software system would thus be an "instantiation" of the reference architecture to specific mission needs.

### 2.2. Need for software reference architecture

#### 2.2.1. Motivation

According to the ISO/IEC standard ISO 42010 [07], the software architecture is defined as:

*"The fundamental organization of a system embodied in its components, their relationships to each other, and to the environment, and the principles guiding its design and evolution"*

A software architecture is the key to create "good quality" software because it promotes architectural best practices and contributes to the quality of the software. A bad architecture hinders the fulfillment of functional, behavioral, non-functional and life-cycle requirements.

## 2.2. Need for software reference architecture

---

According to the "Rational Unified Process"(RUP)[Kru00], the software reference architecture can be defined as:

*"a predefined architectural pattern, or set of patterns, possibly partially or completely instantiated, designed, and proven for use in particular business and technical contexts, together with supporting artifacts to enable their use. Often, these artifacts are harvested from previous projects"*

A software reference architecture prescribes the form of concrete software architectures for a set of systems for which it was developed. So, a reference architecture is a form of "generic" software architecture which prescribes the founding principles, the underlying methodology and the architectural practices that were recognized by the domain stakeholders as the best solution to the construction of a certain class of software systems [Pan11; PV13b].

Elevating a software architecture to a software reference architecture permits to gather and re-use lessons learned and architectural best practices, give new projects a consolidated running start and promote a product line approach [AS10].

A generic software reference architecture is made up of two main parts: [AS10]

- A software architectural concept addressing the pure software architectural related issues
- Architectural building blocks related to functional aspects and the corresponding interface definitions which express functions derived from the analysis of the functional chains of the core on-board software domain



**Figure 2.1.:** Parts of a software reference architecture

Source: [AS10]

As mentioned in the previous section, in order to increase the efficiency and cost-effectiveness in the development process of on-board avionics and to incorporate more number of functionality in the on-board software, the overall objective of space industry would be to standardize the avionics systems and therefore the on-board software.

A building block approach is one of the ways to tackle this problem. In this approach, the on-board software is implemented from a set of pre-developed and compatible building blocks, plus specific adaptations and "missionisation" according to specific

## 2. The On-board Software Reference Architecture (OSRA)

---

mission requirements [AS10]. The target missions are the core ESA missions, i.e. high reliability and availability spacecraft driven systems (eg. operational missions, science missions).

The "right" building blocks need to be produced and supplied by the suppliers to any system integrator and to achieve this, reference architectures need to be defined.

A software building block, generally:

- Has a clear, well defined, specified, documented function and open external interfaces for the purpose of interaction
- Meets defined performance, operation and other requirements
- Is self-contained so that they can be used at higher-integration levels eg. board, equipment, subsystem
- Has a quality level that can be assessed
- Is applicable in well defined physical and hardware environment
- Is worth developing as they are going to be used in bulk of ESA missions
- Is designed for reuse in different projects, by different users under different environments
- Can be made available off-the-shelf, ready for deployment under different conditions.

Separation of the application aspects from the general-purpose data processing aspects is the key to generic/reusable software architectures [Pan11]. The lower layers of the architectures usually handle the implementation of communication, real time capabilities etc. and the higher level layers usually deal with the application aspects. However there have to be ways to annotate the application building blocks (ABB) with sufficient information regarding requirements related to communication, real-time, dependability etc., so that the platform building blocks (PBB) can provide the suitable complete implementation. Development of interface specifications with reference architectures as the basis allows the implementation of the famous AUTOSAR concept: "*Cooperate on standards, compete on implementation*"[Gmb]

The OBSW life-cycle needs to be consistent with the system life-cycle, which features the definition of functional increments in system development [AS10]. Hence, OBSW must in particular:


- Allow for faster software development
- Be compatible to a late definition or changes of some of its requirements

- Cope with various system integration strategies

### 2.2.2. User needs

The COrDeT study, with the slogan "Faster, Later, Software", represented a summary of the above programmatic stakes for the on-board-software life-cycle [AS10; RFA+12]. These stakes are included and defined as the user needs [AS10; Pan11] for the development of OSRA:

**Shorter software development time** Need for faster software development in the context of a shorter schedule. The Figure 2.2 depicts the reduction in the schedule for software development in the future projects.

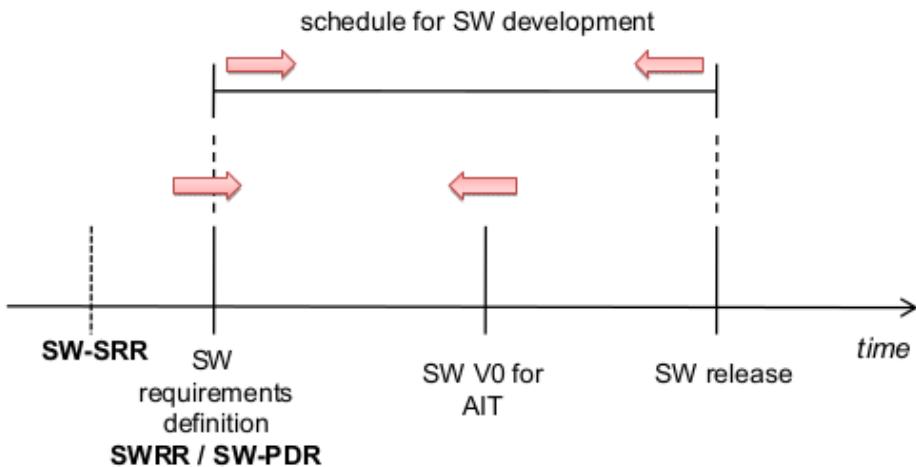

**Figure 2.2.:** Reduction in the schedule for software development

Source: [AS10]

**Reduce recurring costs** Identification and reduction of recurring costs by providing the same set of functions eg. device drivers, real-time operating systems, communication services etc.

**Quality of the product** Need for high quality software (timing predictability, dependability, etc.) and the quality must be at least the same as one of OBSW developed with current approaches.

**Increase cost-efficiency** Increase in the "value" of the software product that is developed for a given amount of budget.

## 2. The On-board Software Reference Architecture (OSRA)

---

**Reduce Verification and Validation effort** The new development approaches shall foster the reduction of effort for Verification and Validation efforts, which is one of the main contributor to the cost of software development.

**Mitigate the impact of late requirement definition or change**

**Support for various system integration strategies** It should be possible to do preliminary software releases which allow early system integration efforts.

**Simplification and harmonization of FDIR** A simplification and hopefully, harmonization of the Fault Detection, Isolation and Recovery (FDIR) approach is advocated.

**Optimize flight maintenance** There should be provision for changing the OBSW during flight maintenance and coordination of strategies to perform it.

**Industrial policy support** Enable multi-team software development, so that subcontracting to the non-primes is possible, while still being in-charge of the integration.

**Role of software suppliers** Increase competence of supplier and foster competition among them.

**Dissemination activities** System engineers should be exposed to the core principles of the process.

**Future needs** Future needs such as integration of functions of different criticality and security levels, use of Time and Space Partitioning (TSP), support to multi-core processors, need to be subjected to evaluation and their impact on software reference architecture need to be monitored.

### 2.2.3. High level requirements

The user needs are translated into a set of high-level requirements for OSRA [AS10; Pan11].

**Software reuse** The architecture shall be designed in such a way that the reuse of the functional aspects should be independent of the reuse of the non-functional aspects, reuse of the unit, integration and validation tests are made possible.

**Separation of concerns** Separation of concerns is one of the cornerstone principles of OSRA and it deals with separating different aspects of the software design, in particular the functional and non-functional concerns. Separation of concerns helps to reuse functional concerns independently from non-functional concerns, which increases the software reuse.

**Reuse of V&V tests** The chosen architectural approach should also promote the reuse of Verification and Validation tests that were performed on the software and not just the software itself. The aim is to maximize the reuse of the tests written for the functional part of the component software.

**HW/SW Independence** Software should be developed independent from the hardware features. It is necessary to separate parts of the software that interact directly with the hardware, into separate modules and make them accessible through defined interfaces. In this way, as long as the interface does not change, the software is isolated from the changes in the hardware-dependent layers.

**Component based approach** The whole software should be designed as a composition of components that are reusable in nature. The architecture shall respect preservation of properties of individual building blocks, once they are integrated into the architecture and it should be possible to calculate the system's property as a function of components' individual properties. The former is called composability and the latter is called compositionality [PV09]. Chapter Chapter 3 explains this approach in more detail.

**Software observability** The software architecture should provide means to observe the software specific parts and extract current and past status of the software using the services specified by its operational scenarios.

**Software analysability** The design process and methodology used for the reference architecture shall support the verification of functional and non-functional properties at design time.

**Property preservation** The non-functional properties should be considered as constraints on the system as they specify the "frame" in which the system is expected to behave. These properties have to be preserved or enforced so that these properties are not only used for the analysis of the software model, but also find their way through to the final system at run-time. Adequate mechanisms should be provided to handle the enforcement of the properties and also mechanisms to handle reactions to violation of these properties.

**Integration of software building blocks** The architecture should allow the combination of coherent building blocks.

**Support for variability factors** The architecture shall include design features allowing isolating the variability foreseen in the domain of reuse.

**Late incorporation of modification in the software** The architecture should be immune to late modification of the software in the software life-cycle. System integration almost always finds some system problems and it is the responsibility of the software to contain these problems and implement new requirements. The

## 2. The On-board Software Reference Architecture (OSRA)

---

architecture to which the software is conformal to, should be able to handle these late modifications in the software.

**Provision of mechanisms for FDIR** The requirements for FDIR, are consolidated often late in the life cycle and the software architecture must accommodate for it.

**Software update at run-time** The reference architecture should allow update to single software components as well as their bindings without having to reboot the entire on-board computer as it is a risk for the system and reduces the mission availability/up-time.

### 2.3. The Software Architectural Concept

#### 2.3.1. Fitting Model-Driven Engineering

MDE is a novel trend for software development in the space domain, but has been successfully applied to enterprise computing [PV09]. The validation-intensive real-time high-integrity systems such as on-board software systems make the adoption of the MDE considerable more arduous. Positive experiences on the application of MDE to the design of these kind of systems do exist and it can be found in the 'CHESS: space case study' [PV14] and the 'ESA: reference Earth Observation case study' [PV14].

In MDE, the principal design artifact is a model, which is an abstract representation of the system under development which encompasses systems and software architecture. Each model conforms with a metamodel, which describes the syntax of entities that populate the models, as well as their relationships and the constraints in place between them. The metamodel constrains the design space of the MDE infrastructure [Gén].

COrDeT (Component Oriented Development Techniques) aimed at investigating various techniques in fields such as software product line engineering, model driven engineering and component orientation [RFA+12]. Based on this study, the concept of overall software reference architecture, in the development of OSRA, is considered to be made up of SoftRefArch, SAVOIR:

**Component Model** A component model is the basis for designing the software as a composition of individually verifiable and reusable software units [PV].

**Computational Model** A computational model is used to relate to the design entities of the component model, their non-functional needs for concurrency, time and space, to a framework consisting of analysis techniques, in general, to a set


## 2.3. The Software Architectural Concept

of schedulability analysis equations, which help to judge formally, whether the description of the architecture is statically analyzable [BPV08]

**A Programming Model** A programming model is used to ensure that the implementation of the design entities obey the semantics and the assumptions of the analysis and the attributes used as input to it.[PV13a]

**A conforming Execution Platform** An execution platform helps to preserve at run-time, the properties asserted by the static analysis, and is able to react to possible violations of them.

These become the key ingredients for the very foundation of the MDE design methodology focused on the principle of correctness by construction and property preservation, which are high level requirements respectively and Figure 2.3 gives a pictorial representation of it.

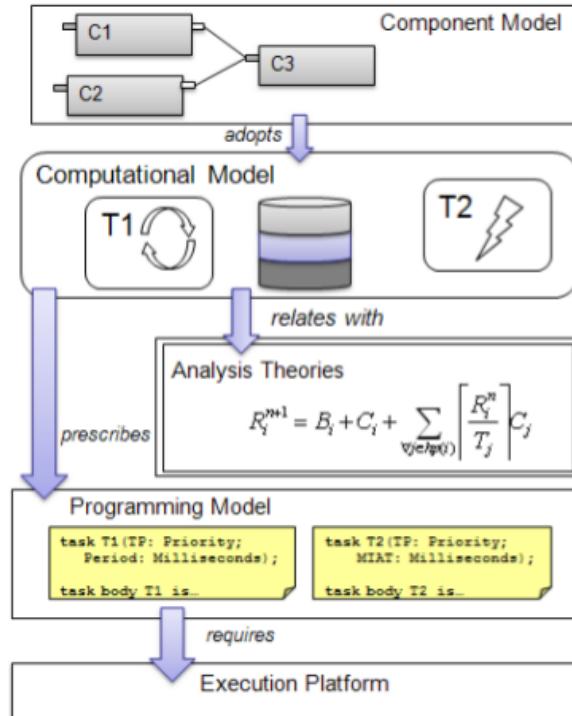

**Figure 2.3.:** The four constituents of the software reference architecture

Source: [Pan11]

## 2. The On-board Software Reference Architecture (OSRA)

---

### 2.3.2. Component Model

Component Based Software Engineering (CBSE) is a software methodology centered on the systematic re-use of software by realizing the software as assembly of units of composition called components [CLWK00]. The adoption of Component Based Software Engineering (CBSE) in the context of high-integrity real-time systems in general and in space domain in particular is not so popular as in the other main-stream domains like enterprise computing [AS10] because of strong verification and validation requirements imposed in the space domain and the presence of non-functional dimensions [AS10].

The principles of Component Based Software Engineering (CBSE) when combined with the principles below can be used to build OBSW as an assembly of components [AS10]:

- Principle of separation of concerns, by allocation of concerns to three distinct software entities: the component (which is a design entity), the container and the connector (which are entities used in implementation only and do not appear in the design space)
- Possibility of verification of properties related to composability and compositionality [PV09]

The execution platform defined in the software architecture then provides the services to the components, container and the connectors. Finally, the entire software is deployed on the physical architecture (Computational units, equipment, and the network interconnections between them).

### Founding principles of choice

This section describes the founding principles of choice of the component model:

**Correctness by construction** E.W. Dijkstra in his ACM Turing lecture in 1972 suggested that the program construction should be done after a valid proof of correctness of construction has been developed [PV14]. Two decades later, a software development approach called Correctness by Construction (C-by-C) was proposed which advocated the detection and removal of errors at early stages, which leads to safer, cheaper and more reliable software [Pan11; PV14]. The Correctness by Construction practice follows:

- To give a solid reasoning on the correctness of the document or code, it is necessary to use formal and precise tools and notations for their development and verification
- Defining things only once so as to avoid contradictions and repetitions

### 2.3. The Software Architectural Concept

---

- Designing the software that is easy to verify e.g. by using safer language subsets or using appropriate coding styles and software design patterns.

In OSRA and the component model developed along with it, the Correctness by Construction principle is changed to be applicable to a CBSE approach based on Model-driven Engineering (MDE) [PV14] wherein:

- The components are designed
- The products designed by the design environment can be verified and analyzed by the design environment.
- The lower level artifacts are automatically generated and the software production is automated to the maximum extent.

**Separation of concerns** Separation of concerns was first advocated by Dijkstra [PV14] and it helps to separate the aspects of software design and implementation. The OSRA and its associated component model promotes separation of concerns [Pan11; PV14]:

- The components are restricted to hold the functional code only. The non-functional requirements which has effects on the run-time behavior e.g. tasking, synchronization and timing are dealt by the component infrastructure, which is external to the component which realizes the functional code. The component infrastructure mainly consists of containers, connectors and their run-time support.
- A specific annotation language is specified which is used to define the non-functional requirements and these are annotated on the components realizing the functional code.

By this, model transformations that automatically produce the containers and connectors that serve the non-functional requirements, enable the execution of the schedulability analysis directly on the model of components. This makes the implementation of the non-functional concerns fully compliant with its specification [BPV08].

- A code generator (whose development is the prime concern of this Master thesis) operates in the back-end of the component model, builds all of the component infrastructure that embeds the user components, their assemblies and the component services that help satisfy the non-functional properties [PV13a].

Inculcating the principle of separation of concerns in the development process has two major benefits [PV14]:

## 2. The On-board Software Reference Architecture (OSRA)

---

- It increases the reuse potential of the components, which is an important high level requirement described in the previous section [AS10]. The reuse potential of the component is increased because the same component can now be used under different non-functional requirements (as per the instantiations of the component infrastructure).
- It helps in the generation of vast amount of complex and delicate infrastructural code which takes care of realizing the non-functional requirements on the run-time behavior of the software. This increases the readability, traceability and maintainability of the infrastructural code.


**Composition** When composability and compositionality can be assured by static analysis, guaranteed through implementation, actively preserved at run-time, the goal of composition with guarantees as discussed by Vardanega can be achieved [PV14]. This is also one of the high level requirements defined in the section before.

Composability is guaranteed when the properties of individual components are preserved on component composition, deployment on target and execution. The components, as mentioned before, implement functional code, most part of which is sequential only and they do not have to worry about the non-functional semantics. The components behave like black-boxes and showcase to the external world only provided and required interfaces. Other components or infrastructural components are expected to communicate through these defined interfaces only. Hence, when components are composed with each other with matching required and provided interfaces, the functional composability is guaranteed which is necessary but not sufficient.

The non-functional requirements/constraints are annotated on the components (specifically the component interfaces) and they are realized by the container which encapsulates the respective component [AS10; PV]. The provided interface determines the semantics of the invocation and adds to the functional capabilities provided by the component. These semantics must match with the execution semantics described by the computational model, to which the component model is attached. An example for composable property is shown in Figure 2.4. In this case, the number of threads and protected objects generated per component, which entirely depends on the extra functional notations to the component interface should be invariant across component composition for the composable property to hold true.

The computational model chosen should help extend composability to the non-functional constraints e.g. concurrency and the ones related to real-time and make it possible to get a compositional view of how execution occurs at the system level. Compositionality is said to be achieved when the properties of the system as a


### 2.3. The Software Architectural Concept

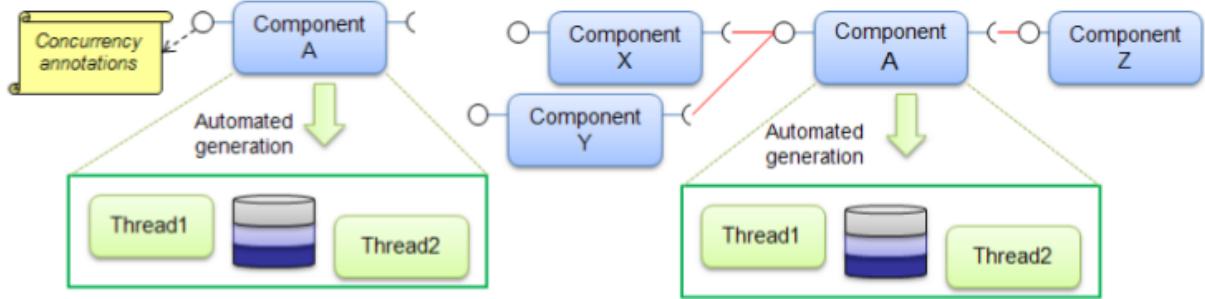

**Figure 2.4.:** Example for composability

Source: [Pan11]

whole is a function of the properties of the constituting components. Finally, the binding of the computational model to the component should allow the execution semantics of the components with non-functional descriptors to be completely understood. An example for compositionality is shown in Figure 2.5. In this case, it should be possible to calculate the overall latency for the delivery of an output (i.e., the worst-case response time of the end-to-end chain of activities) from individual latencies of different components for the property of compositionality to hold true.

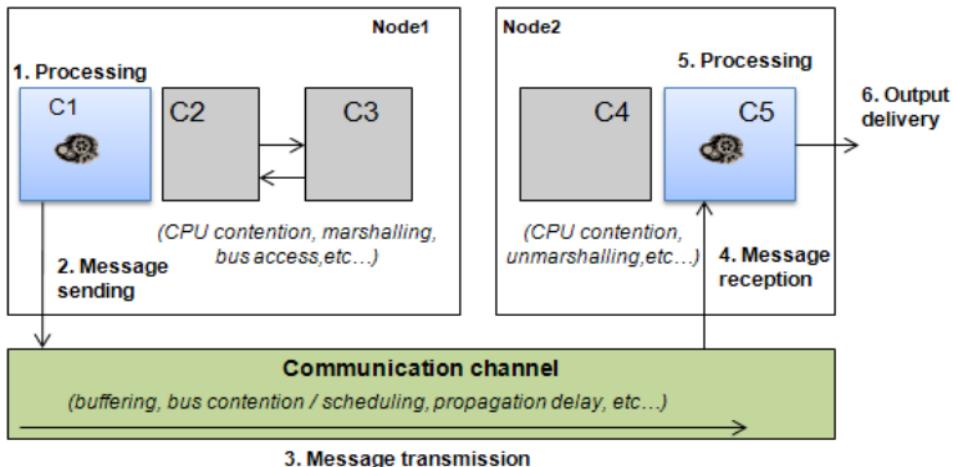

**Figure 2.5.:** Example for compositionality

Source: [Pan11]

In OSRA, the first and second needs can be met by having correct representation of non-functional attributes in the component interfaces and the third need is taken care of by the generation of proper code artifacts, which is the main concern of this Master thesis.

## 2. The On-board Software Reference Architecture (OSRA)

---

### Software entities

The following section describes more about components, containers and the connectors.

**Component** Chaudron and Crnkovic describe that a Component model defines standards for properties that individual components must satisfy and the methods and possibly ways to compose components [PV14].

A component provides a set of services and exposes them to the external world as a "provided interface". The service which is needed from other components or the environment in general are declared in a "required interface". A particular component connects to other components in order to satisfy the needs of its required interfaces. An event based communication system is also possible between components and a component can register to an "event service" to get notified about events emitted by other components.

Non functional attributes are added to the component interfaces as discussed before in the previous section on separation of concerns.

The adoption of hierarchical decomposition of components can be an effective way of defining components instead of defining a containment relationships. A child component can be developed to any component which would delegate and subsume the relationships between the interfaces of the child component and its parent. But the drawback is that various non-functional dimensions applicable to the space domain complicate the picture and hence is hierarchical decomposition of components not allowed at the current stage pf development [Pan11].

**Container** The container is a software entity that wraps around the component, which is directly responsible for realizing the non-functional properties. The relation between the component and the container is a famous software design pattern called the "inversion of control" [Fow; PV14]. All in all, the reusable code (the container), controls the execution of the problem-specific code (the component).

The container exposes the same provided and required interfaces as that of the component and is able to support the component's execution with the desired, relevant non functional concerns attached to the component interface [PV09]. The container also intercepts the calls made by the component to the other components/services requested from the target platform and transparently forward them to the container of the target component/target platform pseudo component (A pseudo component is a kind of component which is used for interaction purposes only). The former principle is called interface "promotion" and the latter is called the interface "subsumption" [PV09]. The container and the component

### 2.3. The Software Architectural Concept


interact with each other according to the inversion of control design pattern, but the binding between components are still defined at software initialization time.

**Connector** The connector is a software entity responsible for the interaction between the components (actually between the containers that wrap around them). Connectors assist in implementing separation of concerns as the concerns of interaction is separated from the functional concerns. Components are thus void of code related to interactions with other components, however the component model requires that the user specifies the interaction style in the component interfaces.

The component can be specified independently of the components it eventually binds to, the cardinality of the communication and the location of the other components it connects to, thanks to the principle of separation of concerns.

No complex connectors are necessary in this Master thesis because, a simple linux based PC is chosen as a target system for component deployment and this greatly reduces the variety of connectors needed. Connectors necessary for function/procedure calls (which are usually straight-forward) are sufficient in this Master thesis. One of the major reasons, to go for a simple system is because this Master thesis does not deal with the hardware design or hardware modeling of the on-board software systems.

Figure 2.6 shows a connector mediating a connection between components A and B. The figure also shows components A and B being enveloped by their containers respectively. The containers would be responsible for the realization of the non-functional properties of the respective components they envelop.

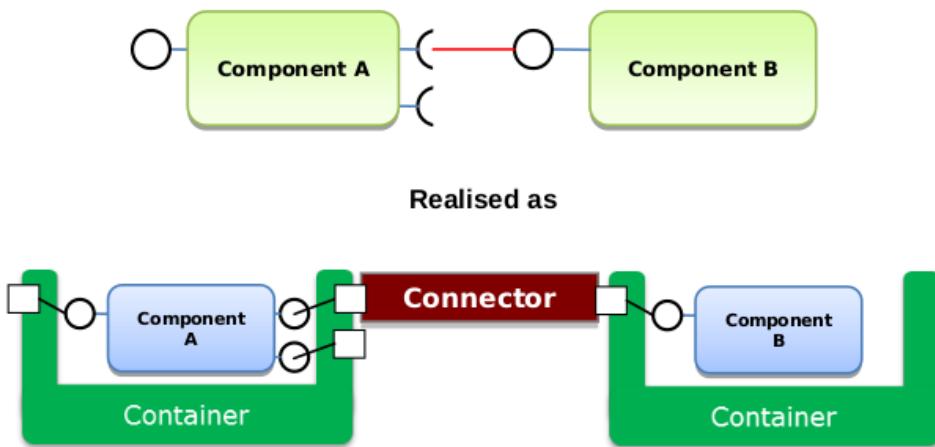

**Figure 2.6.: Components, containers and a connector connecting them**

Source: [Pan17]

## 2. The On-board Software Reference Architecture (OSRA)

---

### 2.3.3. Computational model

Using a computational model is necessary as per the Space Software engineering standard (ECSS-E-ST-440C) standard [AS10]. A dynamic software architecture is described according to an analyzable computational model which infers that the model development is fully consistent with that which underpins the mathematical equations which are used to predict the schedulability behavior of the system [BPV08]. The computational model is more concerned about entities that belong to the implementation model (eg. tasks, protected objects and semaphores). A more abstract level description of these entities should be provided so that [AS10]:

- Pollution of the user-models with entities that are more primitive and are of interest to the lower levels of abstraction, is avoided. This is in line with the principle of separation of concerns, which is one of the high-level requirements.
- The abstract representations represent the entities and their semantics faithfully.
- Correct transformation of the information set by the designer in the higher-level representation to entities recognized by the computational model is ensured. This is in line with the principle of property preservation, which is also one of the high level requirements.

### 2.3.4. Programming model and the execution platform

The execution platform is a part of the software architecture providing all the necessary means for the implementation of a component and the computational model. It comprises of the middleware, the real-time operating system/kernel (RTOS/RTK), communication drivers and the board support package (BSP) for a given hardware platform. The services provided by the execution platform can be categorized into four different types [AS10]:

**Services for containers** These services are meant to be used by the containers e.g. Tasking primitives, synchronization primitives, primitives related to time and timers.

**Services for connectors** These services are intended to be used by the connectors and it consists of actual communication means between components, ways to handle physical distribution across processing units, libraries used for translating data codes.

## 2.3. The Software Architectural Concept

---

**Services to components** These services are supposed to be used by the components which implement the functional constraints. Typical services include: provision of on-board time for time-stamps, context management and data recovery. Access to these services are intercepted by the container wrapped around the component (refer section Section 2.3.2)

**Services to implement "abstract components"** These services include PUS monitoring, OBCPs, hardware representation etc.

It is important to note that different implementation of containers and connectors are necessary for each execution platform of interest.

The programming model realizes a given computational model and together with a conforming execution platform, it is possible to achieve the following goals [Pan11]:

- Ensure that the implementation fully conforms with the semantics prescribed by the computational model and those assumed by the analysis
- Ensure that the contracts stipulated between the components are respected at run-time. This is in-line with the principle of property preservation which is one of the high level requirements.

The achievement of those two goals would then warrant that the system represented for the analysis purposes is a faithful representation of its implementation and the results of the analysis performed on the system model would be a valid prediction of the system at run-time [Pan11].

The programming model, which is the subject of this Master thesis, is realized by adopting Tasking framework as a computational model whose concurrency semantics would conform to the analysis model.



## Chapter 3

# Overall component-based software development process

---

### 3.1. Introduction

In this chapter the design and implementation steps for the component-based software engineering (CBSE) approach are elaborated. The software design process involves two main actors: the software architect who is responsible for the entire software and provides support at system-level to the customer, and the software supplier who is responsible for the development of part of the software [PV14]. The parts of the software supplied by the software suppliers are then integrated in the final integration step.

Most of the activities described below come under the responsibility of the software architect, but as soon as the component is defined, it can undergo a detailed design and code implementation. This may indicate some shortcomings and flaws in the design of the component, which might trigger a re-design, re-negotiation of the component definition. This often leads to an iterative/incremental development process [BPV08]. Detailed design and implementation of components are usually done by the software developers or it may be subcontracted to third party software suppliers.

### 3.2. Design entities and design steps

There are two kind of entities which are defined in OSRA: Design-level entities which are explicitly specified in the design space and require the skills of the user to use them, real-time architecture entities which are not explicitly represented in the design

### 3. Overall component-based software development process

---

space, instead they are automatically generated by the code-generation engines. The automatic generation of containers and connectors are possible only upon the knowledge of the computation model and execution platform that are going to be adopted [AS10; PV14]. As already mentioned in the previous chapter, this master thesis considers Tasking Framework as the computational model and a normal linux based machine as the execution platform.

The following entities belong to the design space: Data types, events, interfaces, component types, component implementations, component instances, component bindings and the entities required for the description of the hardware topology and platforms. The following entities belong to the real-time architecture: containers and connectors.

The development process is clearly divided into different steps [AS10; Pan11; PV14]:

**Step 1: Definition of data types and events** Data types are the basic entities in the approach and they can be primitive types, enumerations, ranged or constrained types, arrays or composite types (like structs in C or record types in Ada). An event is used in the publish-subscribe communication paradigm and it is an asynchronous message passing scheme.

**Step 2: Definition of interfaces** A set of operations with one or more already typed parameters, each with a direction (*in*, *in out*, *out*) are grouped together to form an interface. The interface can also hold a set of interface attributes of an already defined data type. The interface attributes can have read-only or read-write accesses. From the list of interface attributes, set of getter and setter operations can be generated for the attribute access, in particular getter operations for attributes with read only access and getter,setter operations for attributes with read-write access.

Figure 3.1 depicts three data types and an event. Interface `A0CS_IF` and `THR_IF` implement only operations while interface `GYR_IF` comprises one read-only attribute.

**Step 3: Definition of component types** Component types form the basis of a reusable software asset [PV14]. The software architect defines the component type to provide the specification of the functions that the component of this type would implement. The component types are independent of each other and they can consist of:

- One or more provided interfaces, which list the services that the component of this type would provide
- One or more required interfaces, which list the functional services that the component of this type would require in order to function correctly according to the functional specifications

### 3.2. Design entities and design steps

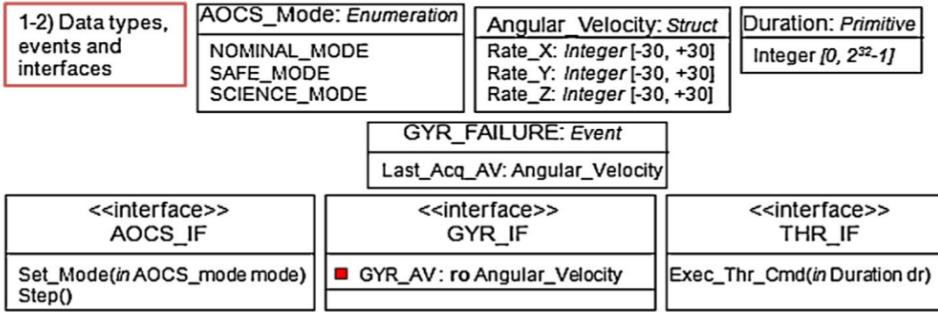


Figure 3.1.: Data types, events and interfaces

Source: [PV14]

- A set of component type attributes of already defined data types that are local to the component cannot be accessed from outside.
- Event emitter/receiver ports to raise or receive events In order to specify the provided and required interfaces, the component type references the interfaces that were defined in Step 2. This helps in straight forward matching of the required and provided interfaces

Figure 3.2 depicts a component type AOCS. This component type provides interface AOCS\_IF and requires interfaces GYR\_IF and THR\_IF. It also raises events of type GYR\_FAILURE.

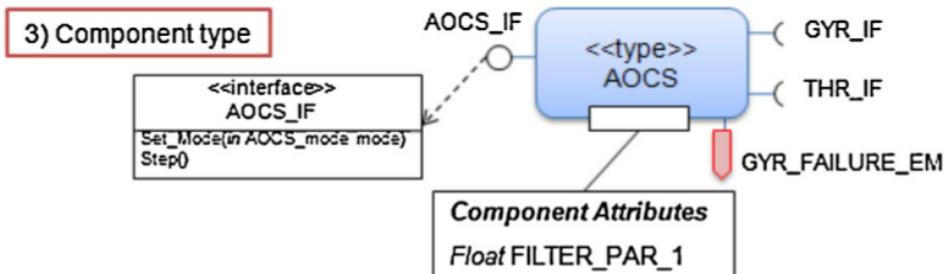


Figure 3.2.: Component type

Source: [PV14]

**Step 4: Definition of component implementations** The software architect now creates and refines a component implementation from the component type. The component implementation contains the functional code in the form of source code that implements all the services that the component is supposed to provide.

### 3. Overall component-based software development process


---

It acts as a black box and only its external interfaces are only that matter. It is also a subcontracting unit to the software supplier.

A component type can have more than one implementation and all of these implementations contain only pure sequential code i.e. it is void of any tasking or timing constructs. Implementations can be developed in multiple languages such as Ada, C, C++ etc.

The component implementation should also provide constructs to store the attributes exposed through its provided interfaces and its component type. Technical budgets such as worst-case execution time (WCET) for a particular operation, maximum memory foot-print for component implementation, maximum number of calls to a certain operation on a required interface, can be placed on the entire component or on the operations and the implementation of the component shall respect this budget. Despite a sequential nature of the code, a component implementation may set specific non-functional constraints to preserve the functional correctness of its behaviour. Component implementation is thus a particularly attractive unit to be subcontracted to a third-party software supplier because the software architect can define components, attach technical budgets to it and delegate the implementation to the software suppliers. The software suppliers might add additional operations to the component implementation as and when necessary for the implementation [PV14].

Figure 3.3 depicts one of the many possible component implementations for the component type AOCS

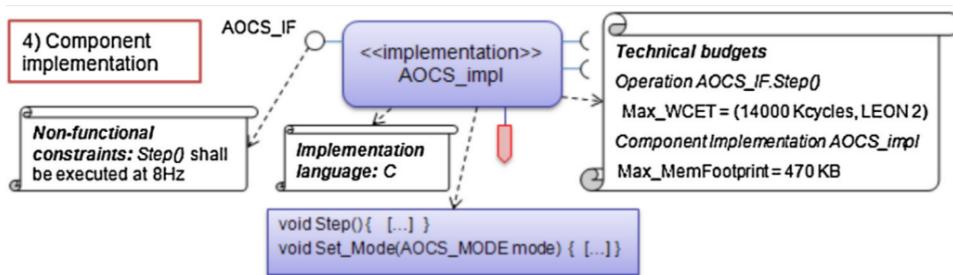

**Figure 3.3.: Component Implementation**

Source: [PV14]

**Step 5: Definition of component instances** A component instance is an instance of a component implementation. It is a deployment unit which is subjected to allocation on a processing unit and it is an entity on which the non-functional properties are specified. Specifically, the non-functional properties are attached, as in ??, to the

provided interface side of the component, as they are the expression of a property or a provision of the component instance.

**Step 6: Definition of component bindings** Component bindings, as the name suggests, are the connections between one required interface of a component and the provided interface of another component. These bindings are set at design time and is subjected to static type matching to ensure that correct required and provided interfaces are connected to one another. This can be done by asserting the compatibility of the two interfaces (by type system or by inspection of the signature of their operations). If the binding is legal then whenever a call is made to an operation in the required interface, the call is dispatched to the correct operation in the bound provided interface. The signature of the calling operation in the RI (required interface) and the called operation in the PI (provided interface) are different and the connector, connecting these two interfaces, is in charge of performing this step. A tool support (possibly a back-end code generator) should initiate the configuration of the connector to perform this kind of binding.

It is also possible in this step to define bindings between an event emitter port of one component and an event receiver port of another component as shown in Figure 3.4.

**Step 7: Specification of non-functional attributes** After component instances and component bindings have been defined, the software architect adds non-functional attributes to the services of the provided interfaces.

In this step, the software architect specifies the timing and the synchronization attributes [PV14]. At first, the concurrency kind of the operation is established, and they can be synchronous or asynchronous operations. In case of a synchronous operation, it is executed in the flow of control of the caller and in case of an asynchronous operation, the operation is executed by a dedicated flow of control on the side of the callee.

An immediate operation is said to be protected if it needs to be protected from data races in case of concurrent calls. The operation is said to be unprotected if it is free from such risks. In case of a deferred operation type, the architect can choose one of the following release patterns for the operation:

**Periodic operation** The execution platform executes the operation at fixed periods with a dedicated flow of control.

**Sporadic operation** Two subsequent execution requests are separated by a minimum timespan called the minimum inter-arrival time (MIAT). The execution platform and the infrastructural code should guarantee this MIAT separation

### 3. Overall component-based software development process


---

between two subsequent calls to the operation and the component implementer does not have to worry about it.

**Bursty operation** Only particular number of activations of an operation is allowed in a bounded interval of time. Again the execution platform and the infrastructure code guarantees this and the component implementer does not have to worry about it, as in the case for sporadic operation.

For all the operations which have concurrency kind set as asynchronous, the software architect must provide the worst case execution time (WCET) of the operation. A preliminary value of WCET is initially provided based on previous use of operations in other projects (if any) and they can be refined with bounds at later stages after performing a timing analysis for a given target platform.

?? depicts the component bindings between the required and provided interfaces of the AOCS and Mode\_Manager component instances. It also depicts that non-functional properties which are specified on the services provided by the provided interfaces.

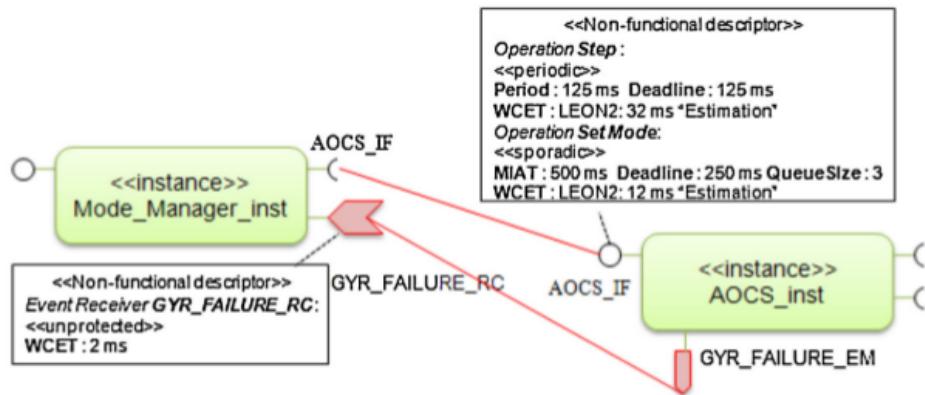

**Figure 3.4.:** Component instance, component bindings and decoration with non-functional attributes

Source: [PV14]

**Step 8: Definition of physical architecture** The hardware topology provides a description of the system hardware limited to the aspects related to communication, analysis and code generation. It also provides a model-level description of the relevant hardware of the system. In the hardware topology, following elements are described:

- Processing units that have a general-purpose processing capability
- Avionics Equipment/Instruments/Remote terminals

### 3.2. Design entities and design steps

---

- The interconnection between the elements mentioned above
- A representation of the ground segment/other satellites (eg. Formation flying) to state the connection between the satellite and ground segment or other space segments

For the specification of these elements, following attributes are used:

**Processor frequency** This is used for processors to re-scale WCET values expressed in processor cycles in Step 6

**Bandwidth** This is used for buses and point-to-point links and it indicates maximum blocking time due to non-preemptability of the lower priority message transmission (for whatever reason), minimum and maximum size of packets, minimum and maximum propagation delay, the maximum time that the bus arbiter/driver needs to prepare and send a message on the physical channel and maximum time for the message to reach the receiver

**Step 9: Component instances and component bindings deployment** In this step, the component instances are allocated on the processing units defined in the hardware topology (refer Step 8). In majority of the cases, it is straight-forward to allocate the bindings between the components as they are deployed on the same processing units [PV14]. In other cases, they need to be specifically allocated.

**Step 10: Model-based analysis** The system model developed within the software reference architecture is subjected to schedulability analysis to determine whether the timing requirements set in the interfaces can be met.


From the user model which is a PIM (Platform Independent Model), a Schedulability Analysis Model (SAM) which is a PSM (Platform Specific Model) is created. This model is subjected to analysis and the results of the analysis is available for the software architect as a read-only result.

The analysis transformation chain requires a model representation of the generated containers and connectors to be defined in the SAM for an accurate analysis [PV14].

Please note that, step 10 is not of concern in this Master thesis as this Master thesis deals only with automatic generation of containers and connectors and hence an accurate model based schedulability analysis is outside the scope. It is assumed in this Master thesis, that the user model successfully passes the Model based schedulability analysis and hence it is subjected to the model-code transformation directly. The actual flow is as depicted in Figure 3.5. Steps 8-9 are not of concern in this Master thesis, as it deals with hardware modeling and they are again outside the current scope of this Master thesis. However, these steps were mentioned for the sake of clarity and continuity.

### 3. Overall component-based software development process

---

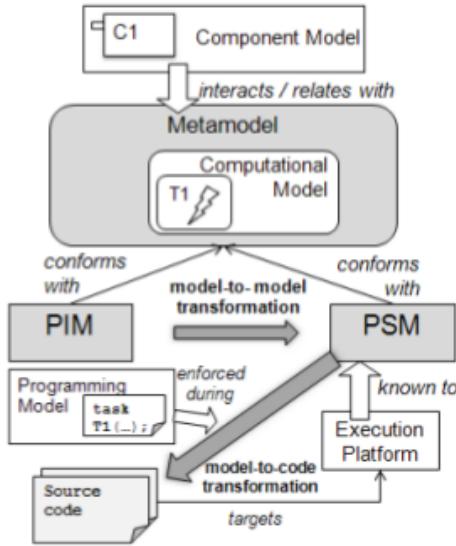

**Figure 3.5.: Generation of SAM and model-code transformation**

Source: [PV09]

**Step 11: Generation of containers and connectors** This step is one of the main focus points of this Master thesis as mentioned before. Containers and connectors are generated and they specify:

- The structure of each container in terms of the required and provided interfaces of the enclosed component that they delegate and subsume
- The structure of each connector


The non-functional attributes, component instances deployment and component connectors deployment play a major role in determining the creation of connectors and containers and how component instances and their operations are allocated to them.

Concurrency can be achieved by encapsulating sequential procedures into tasks which reside in containers and the protection from concurrent accesses can be provided by attaching them concurrency control structures. All of this can be achieved without modifying the sequential code and simply by following the use relations among the components.

In order for the OBSW to interact with the external world, sensors and actuators need to be provided. These hardware entities are represented as pseudo components (A pseudo-component indicates that a component is for interaction purposes

only) and software capability is attached to these components at the component instance level.

Figure 3.6 depicts the automatic generation of containers and connectors for the components AOCS and Mode\_Manager. It also shows how their component instances are allocated to them.

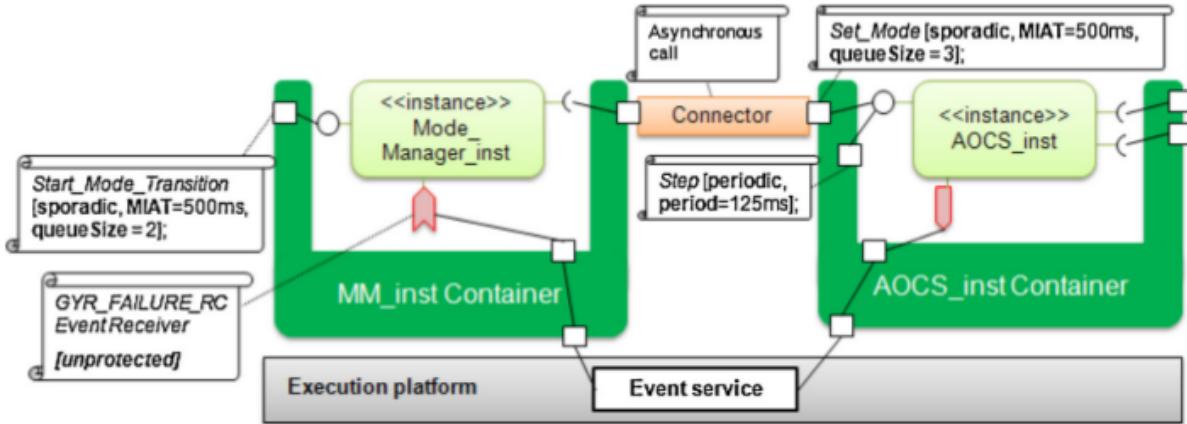

**Figure 3.6.: Automated generation of containers and connectors**

Source: [PV14]

### 3.3. Design flow and design views

When the component model is defined, it also defines implicitly a design flow as shown in Figure 3.7, that needs to be followed, to be able to create an OBSW that meet all its user needs and high level requirements [AS10; Pan11; PV14]. The design flow is as explained in the previous section.

The Obeo Designer Framework provides a concept called 'Viewpoint' and using this concept, the design views are implemented [PV14]. One of the advantages of the design views is to promote or enforce a certain design flow [PV14]. The component model is accompanied by the following design views:


**Data view** This view is for the description of data types and events

**Component view** For definition of interfaces, components and the binding between them to fulfill their required needs

**Hardware view** For the specification of the hardware and the network topology

### 3. Overall component-based software development process

---

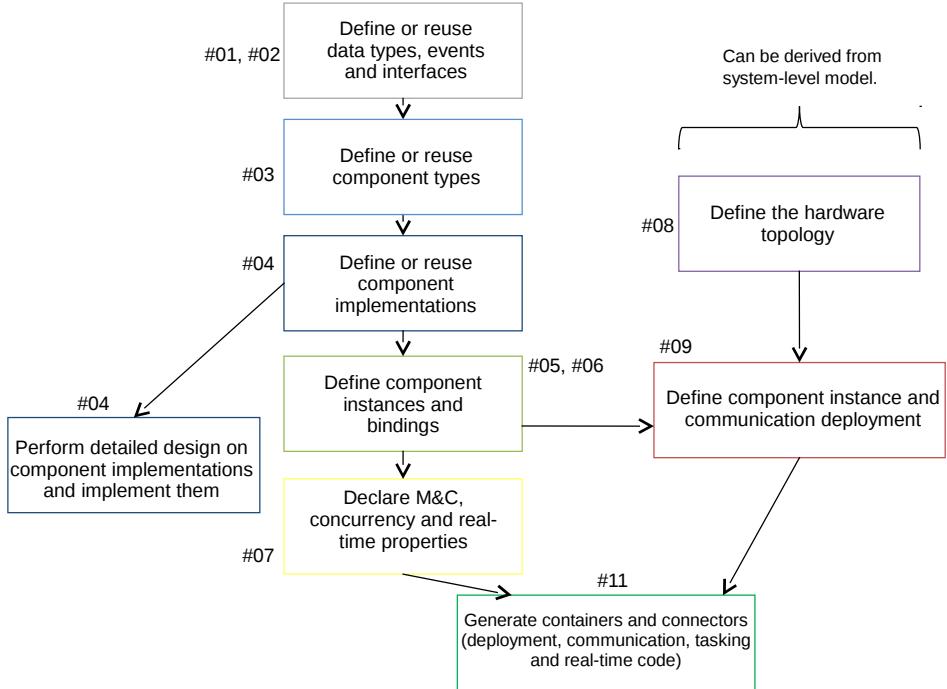

**Figure 3.7.: The overall design flow**

**Deployment view** For the allocation of components to computational nodes


**Non-functional view** In this view, the non-functional attributes are attached to the functional description of components

**Space-specific view** In this view, the services related to the commandability and observability of the spacecraft are specified

### 3.4. Language units of the OSRA

The modeling language provided to the software architect to model the OBSW is divided for the ease of construction of the OBSW models into a set of language units [Pan17]. Each language unit consists of closely related metamodel entities. The language units are grouped into separate meta-models for the sake of re-use as shown in Figure 3.8 [Pan17]. OSRA Component model is composed of the following language units:

**CommonKernel** Defines the basic entities that are used as the base elements of the language architecture

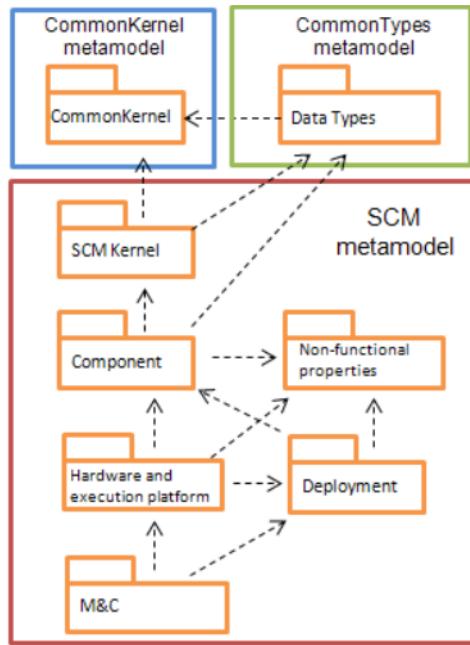

**Figure 3.8.:** Implementation of OSRA component model in the reference implementation

Source: [PV14]

**DataTypes** Defines all the possible data and the data types that can be used in an OBSW model

**SCM Kernel** Defines the infrastructural part of the Space Component Model (SCM) which can be considered as the language to express all the concerns expressed by an OBSW model

**Component** Defines a complete set of interfacing features (interfaces, events, datasets), component types implementations and interface ports

**Non-functional properties** Defines the non-functional properties that can be applied to the modeling entities and a new language called the Value Specification Language (VSL) to specify values characterized by the measurement units

**Deployment** Defines instantiation and deployment entities such as component instances, connection between them and their deployment on the hardware architecture

**Monitor and Control (M&C)** Defines the means to specify the technical properties related to M&C that shall be provided in the OBSW model

**Hardware execution platform** Defines entities related to the execution platform, Time Space Partitioning (TSP) and the hardware architecture

### 3. Overall component-based software development process

---

#### 3.5. OSRA SCM Model Editor


The toolset that the software architect can use to build OBSW models is organized as a set of Eclipse features and Eclipse plugins.

The toolset is available as

- A pre-installed Eclipse (Eclipse Neon) for Windows 64-bit
- An update site which consists of a set of static files which can be placed locally, on a web-server or on a file-server.

In the latter case, the software architect would have to use the Eclipse Update Manager to install the plugins [EO16].

Figure 3.9 shows a screenshot of the OSRA SCM model editor.

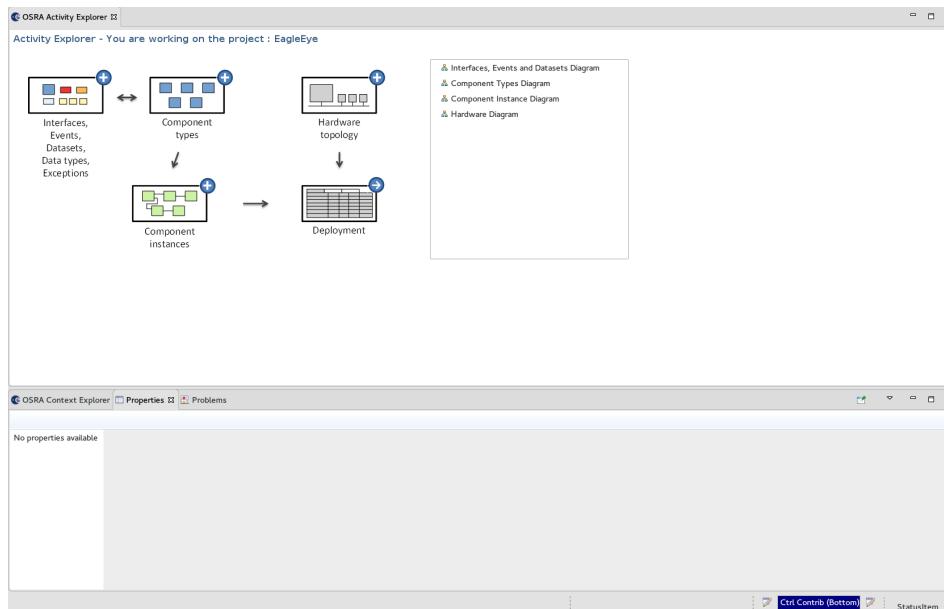

**Figure 3.9.: Screenshot of the OSRA SCM model editor**

In line with the design flow and design views explained in section Section 3.3, different OSRA diagrams can be created with the help of OSRA SCM Model editor namely:

**Interfaces, Events and Datasets diagram** This is the first diagram of the OSRA activity and allows to define the data types, events, data sets and the interfaces that would be used by the components in the Component Types diagram.

**Component Types diagram** This is the second diagram of the OSRA activity and it allows to define the component types, device types, execution platform service types, partition proxy types, required ports whose implementation would be used by the component instance diagram

**Component Instance diagram** This is the third diagram of the OSRA activity and it allows to define the component instances, device instances, execution platform service instances, partition proxy instances, provided interface slots, data receiver slots and event receiver slots.

**Hardware diagram** This is the last diagram of the OSRA activity and it allows to define the hardware elements such as processor boards, mass memory units, devices, buses.

There are also tables which are provided for diagram elements (if applicable) and they are usually found as tabs in pop-up window associated with the group that the element belongs to. Tables are usually classical tables where rows represents an element and each column represent a potentially computed property of the element. Rows can also contain sub-rows recursively which represent the sub-elements and the software architect can collapse or expand these sub-elements as desired. More information and details about install requirements and procedure, usage of the OSRA editor can be found in the reference [EO16].



## Chapter 4

# Tasking Framework

---

### 4.1. Introduction

Future unmanned space missions have a great demand on computing resources for the on-board data processing or for control algorithms. Also, future space missions are requested to achieve more and more challenging scientific goals [Pan11]. Besides the pre-processing of scientific data to reduce the data amount for the downlink, it is also necessary to handle the control systems with optical sensors which come into play, for example for extra terrestrial navigation and landing systems [TAA+17]. Space missions like the Rosetta mission or the landing of the Mars rover Curiosity were based on pre-defined timed command lists to control the landing [MLG13]. Because of this and the uncertainty of propulsion and parachute maneuver, the amount of different landing targets with low risks are considerably reduced [MLG13]. But the interesting areas of planetary research might also include risky landing areas and hence an autonomous control is needed for the spacecraft to control the trajectory and is is also needed to integrate hazard avoiding algorithms [TAA+17]. However, these algorithms have a huge demand for computing power [MLG13].


In TET-1 satellite mission (Technology demonstrator) and BIRD (Bi-spectral Infrared Detection) missions, the estimator and predictor modules were computed in a fixed order and fixed time in the control-cycle [MTRG11]. The timing was a combination of sensor latency and an additional gap time to satisfy the availability of data for computation and this led to a scant timing problem for the control torque computation due to over-estimated static safe-gap times [MH15; MTRG11]. During the launch and early orbit phase (LEOP), a timing violation in another bus application resulted in changing the the order of inter-dependent computations and corrupted data, which further resulted in an unexpected AOCS state [MTRG11]. Figure 4.1 A) depicts such a situation and it can be observed that  $ea = E(A)$  is calculated before  $eb = E(B)$

## 4. Tasking Framework

---

On the other hand, the current on-board systems for the space environment do not provide the needed computing power [MLG13]. The space systems offer several controller boards on the spacecraft, most of them dedicated to only one subsystem and often twice for cold and hot redundancy. Such designs usually raise the power consumption and increase budgets like the mass, envelop and cost [MLG13]. Hence a concept, which allows sharing of computing resources based on predefined configurations for different flight phases and fault scenarios is necessary [MLG13]. The Tasking framework is an incarnation of the Inversion of Control design pattern which is popular practice in lightweight container frameworks [Fow].

A Tasking Framework is hence developed where the timing behavior is changed. Instead of starting computations at a predefined time in the computation cycle, a computation is started whenever the required information is available. All information are stored in messages distributed by channels and the channels initiate the computation when all the defined conditions for the computation are met [MTRG11][MH15]. The timing which can be achieved with Tasking Framework is as shown in Figure 4.1 B).

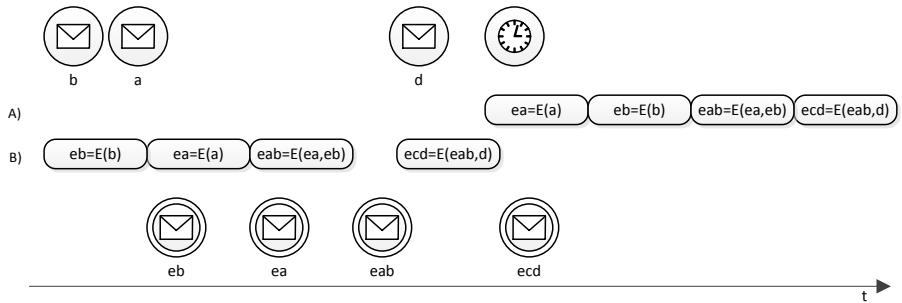

**Figure 4.1.:** Order and timing of computation tasks in BIRD and TET-1 vs order and timing of computation tasks in Eu:CROPIS

Source: [MH15]

## 4.2. Usage of Tasking Framework

The Tasking framework is based on C++ and provides some virtual base classes, which the application developer can overload to develop application specific computations. The Tasking Framework is designed to split the computations into small pieces, which are called tasks and they can be scheduled on the availability of the input data

For each task, a number of task inputs can be specified and each input can be associated with a task channel which provides the memory space and the synchronization for messages consumed by the task. In order to start a task, the task input needs to be configured with the expected number of pushes on the associated task channel and when the number of pushes on the task channel meets the expectation set, the respective task input is activated. When all the inputs of a particular task are activated, the task is automatically started by the scheduler of the Tasking Framework, provided a free computing core is available. If no computing core is available, then the task is queued for execution.

Any of the task inputs of a particular task can be marked as final and when such an input is activated, the respective task is started immediately by the scheduler irrespective of the activation states of the other task inputs. As a result, the task can push onto another channel, which can trigger the other task associated with this channel. This leads to a kind of behavior similar to petrinets, where the activation of the task input is a token and the task execution is a transition [MLG13]. The inputs associated to a task are reset when all its inputs are activated or when the respective activated input is marked as final. Such a reset operation on a task input sets the number of arrived data items on the associated task channel back to zero.

To specify timings in the Tasking framework, a special channel called 'event' is provided [MLG13]. An event is associated with a clock and the task input to which it is associated is notified on each clock tick. When the required number of notifications match the expected number which is already set, the attached task input is activated. Task event can be configured to work with absolute timing, i.e. the task input and in-turn the task is activated at fixed points in time, or the task event can be configured to work with a relative timing i.e, the task input and in-turn the task is activated at points in time relative to the execution time of the task.

To support mapping of tasks in a distributed system, task channels are associated with interfaces to read and write from and to networks and devices. These associations are set up by the configuration manager and are not visible to the application developer.

The current implementation of Tasking framework sits on top of Linux POSIX library, composed by a real-time clock interface, signaling mechanism, memory access and the tasks scheduler. The Tasking framework can also run on RTEMS and FreeRTOS using the outpost libraries which collectively provide a high level abstraction of the underlying operating system [MLG13].

## 4. Tasking Framework

---

### 4.3. Use cases for Tasking Framework

In the project OBC-NG (On-Board Computer - Next Generation) by DLR, a decision is made to design the on-board computer systems as a combination of space qualified processing node, COTS (Commercial off-the-shelf) processing nodes and network nodes [MLG13]. As an operating system for this project, an enhancement of RODOS is used [MLG13; PHW+16]. The enhancement covers mainly the support for multi-core and reconfigurable distributed systems [MR18] and the core element which makes it possible is the Tasking Framework [MLG13]. The configuration manager used in OBC-NG holds predefined mappings of tasks and resources for different hardware configurations of computing resources and mission phases [PHW+16]. The communication infrastructure would be set up based on the mappings during the configuration phases of the system.

The first usage of the Tasking framework was in the ATON (Autonomous Terrain-based Optical navigation) project [TAA+17]. The project was about the navigation system for a moon landing scenario. The project showed that the Tasking framework was a useful way for the parallelization of computations in an expected manner [TAA+17].

Another use-case of Tasking Framework is in the AOCS of Eu:CROPIS (Euglena Combined Regenerative Organic food Production In Space) mission [MH15]. Eu:CROPIS uses a porting of the Tasking framework from Linux to outpost libraries which collectively act as an operating system API on top of RTEMS [MH15].

Tasking framework is also used in MAIUS mission (Matterwave Interferometer in Microgravity) which deals with activities to demonstrate Bose-Einstein condensation and atom interferometry with rubidium and potassium atoms on a sounding rocket [GSL+17; MH15].

### 4.4. Use of Tasking Framework in this Master thesis

Tasking framework is used as a computational model, as discussed in the previous chapter. The reasons for adopting are the following:

- The Tasking framework guarantees that the timing behavior of the system is deterministic and amenable to static analysis
- The Tasking framework has been proven to be expressive enough to handle real-world application (refer previous section on use cases for Tasking framework)

#### 4.4. Use of Tasking Framework in this Master thesis

---

- Tasks do not interact with each other directly, but their communications are mediated by protected objects (task channels). These channels are shared resources equipped with a synchronization protocol in the form of priority based scheduling and FIFO scheduling for tasks with same priorities which uses these shared resources [MLG13].

However, during the course of this Master thesis, certain short-comings of Tasking framework have been identified and they would be topics for discussion in the upcoming chapters



## Chapter 5

# A programming model for OSRA

---

### 5.1. Introduction

In the previous chapters we have seen the model-driven software development approach that was centered on component-based techniques. Dijkstra's principle of separation of concerns was one of the cornerstone principles which was part of the software reference architecture and the component model proposed [PV12; PV14]. According to it, the user design space should be limited to the internals of the components, where only strictly sequential code can be used and the extra non-functional requirements are declaratively specified in the form of annotations on the component provided interfaces. This is already explained in detail in Step 7 (Specification of non-functional attributes) in Chapter 3.

As discussed in the previous chapters, the reference software architecture is made up of a component model, a computational model, a programming model and a conforming execution platform. It is also clear that the component model should be statically bound to a computational model to formally define the computational entities and the rules which govern their usage.

The realization of extra functional properties or more precisely, the generation of the complete infrastructure code can be done in two steps:

- Automated generation of the non-functional code i.e., the code for handling concurrency and interaction requirements for communication between components and the skeletons for the components themselves
- Automated generation of containers for components and the connectors between components

## 5. A programming model for OSRA

---

A code generator needs to be developed for this purpose and the next few chapters would be concerned about realizing the above mentioned steps. As a result, the third-party software supplier can solely concentrate on implementing the functional code of the components. This is in line with the principle of separation of concerns, which is of very high interest.

The ASSERT project (Automated proof-based System and Software Engineering for Real-Time systems) aimed at the definition of a MDE design process for the development of on-board software for satellites, centered on the principles of correctness-by-construction and separation of concerns [Pan11]. The cornerstone of the project is the adoption of an infrastructure called the Ravenscar Computational Model (RCM) [Pan11]. This modeling infrastructure which was developed at the University of Padua [BPV08] included a graphical modeling language and its editor, a model validator and a set of model transformations to feed the model-based schedulability analysis and code generation [BPV08]. It is important to note that the ASSERT project lacked an explicit notion of a component model but incorporated a computational model, a programming model and a conforming execution platform [Pan11]. Certain Ada Ravenscar Profile compliant code archetypes were developed to complete the formulation of the programming model and these archetypes adhered to the vision of principle of separation of concerns and amenable to code generation [PV13a]. The Ada Ravenscar Profile basically does not allow any Ada language constructs that are exposed to unbounded execution-time and non-determinism [BDV04]. The code archetypes used Ada run-time and hence could fit the needs of typical embedded systems which were resource-constrained [BDV04].

In the following Artemis JU CHESS project, an initiative from ESA in parallel to the development of the SCM [Pan11; PV14], a computational model named as Ravenscar Computational Model (RP in the following text) was chosen as the computational model [BPV08]. RP directly emanated from the Ada Ravenscar Profile in language-neutral terms [PV12; PV13a]. The code archetypes from the ASSERT project were revised and extended in the CHESS project and they as well targeted the Ada Ravenscar Profile, for the additional reason that the reduced tasking model used in the Ada Ravenscar Profile matched the semantic assumptions and communication model of real-time theory, the response-time analysis in particular [PV13a]. The code archetypes developed in the CHESS project [PV12] are taken as reference for developing a programming model in this chapter. The code archetypes discussed in this Master thesis, however, target the Tasking framework which is the chosen computational model for this Master thesis. The reasons for choosing Tasking framework as a computational model is already explained at the end of the previous chapter. The code archetypes discussed in this chapter are first steps towards generation of the complete infrastructural code.

## 5.2. Structure of the code archetypes

The code archetypes discussed in this Master thesis strive to attain as much separation as possible between the functional and extra-functional/non-functional concerns. At the implementation level, functional/algorithmic code of a component is separated from the code that manages the realization of the extra-functional requirements like tasking, synchronization and different time-related aspects.

The library of sequential code, which may have as many cohesive operations as the software supplier wishes to include in a single executing component, is included in a closed structure such as a component implementation. The mapping of this structure to the actual design entity of the infrastructural code is not of concern in handled in the next chapter. The sequential code in this structure is executed by a distinct flow of control of the system. The dedicated flow of control can be an active task, together with other tasking primitives from the Tasking framework (if the desired concurrency kind is *asynchronous*). Or, it can be a simple synchronous method/operation invocation, which uses the flow of control of the component requesting the service from outside (if the desired concurrency kind is *synchronous*). This leads to a combined effect that the component internals are completely hidden from outside environment, and the provided services invoked by the external clients are executed with the desired interaction semantics.

As multiple clients may independently require a range of services to be executed by one of the two desired flow of controls i.e. *synchronous* or *asynchronous*, it is necessary to safeguard these execution requests from mixing up. Safeguarding of execution requests in case of *synchronous* service requests is implicit as these requests would have been raised in the respective flow of control of the component asking for the service, but the safeguarding of execution requests in case of *asynchronous* requests needs to be explicitly handled and the way to achieve this is explained in the next parts of this section.

Service requests can often lead to valid/invalid data that need to be sent back safely to the components which made the requests. The service requester also need to be informed about any exceptions that might arise due to any unexpected situations during the servicing of the requests. The mechanisms and semantics necessary for realizing these requirements are also explained in the next parts of this section.


### 5.2.1. Synchronous release patterns

The archetypes for a synchronous release pattern are quite straight forward. When a request for a service is made with the desired concurrency kind specified as *synchronous*,

## 5. A programming model for OSRA

---

the request is handled straight-away as a normal function/operation call in the flow of control of the service requester as shown in Figure 5.1. The results (if any) from the service requests, and exceptions (if any) during the course of handling the service requests are returned back to the service requester using the same flow of control as shown in Figure 5.1.

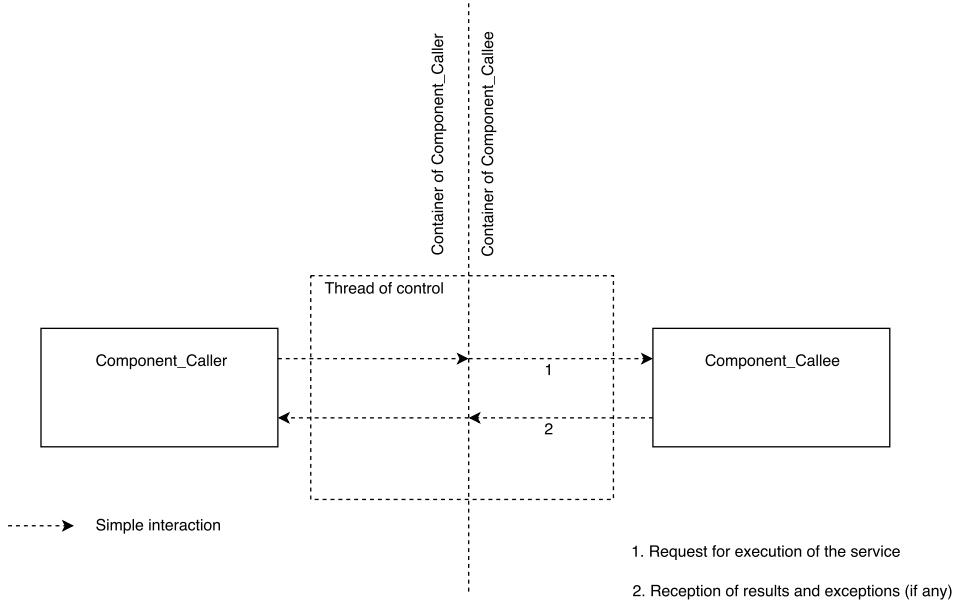

**Figure 5.1.: Synchronous release pattern**

### Protected

When the non-functional property set on the service in the provided interface side of the component offering the service is **Protected**, it is necessary for the container that wraps around the component to safeguard this non-functional property. As the container is the entity that promotes the provided interface of the component, it intercepts the function/operation call from outside and provides exclusive access to the service implemented by the component. Semaphores provided by the Tasking framework is used for this purpose.

### Unprotected

When the non-functional property set on the service in the provided interface side of the component offering the service is **Unprotected**, the semantics of handling the service request is essentially the same as the way the protected operations are handled, except

for the fact that obtaining and releasing of the semaphore for the operation is not anymore needed.

### 5.2.2. Asynchronous release patterns

The archetypes for asynchronous release patterns are quite complicated when compared to archetypes for synchronous release patterns. As the requests cannot be anymore handled in the flow of control of the service requester in case of asynchronous release pattern, tasks from Tasking framework along with other tasking primitives, which are independent threads of execution can be activated to cater to these requests on the provided interface side.

The asynchronous service request is initially intercepted at the required interface port subsumed by the container of the component which makes the request. Here the data (if any), associated with the request is packaged and the packaged data is forwarded to the provided interface port, which is promoted by the container of the component handling the request. Along with the data associated with the service request, it is also important that the required interface port packages information about how to send back the results and exceptions (if any) to the service requester.

In case of asynchronous service requests, if the service request leads to an exception being raised at the service provider end, it is the responsibility of the service requester to cope up with the exception and it is of no interest in this Master thesis. This Master thesis, however, explains how the information about the raised exception needs to be delivered to the service requester.

Each thread of control, having its own structure as explained above, is responsible for only one operation in the provided interface side of the component. As the release patterns for requests are already decided statically and as these release patterns are not expected to change at run-time, the number of threads of control that will be necessary to handle the service requests will be known at compile-time.

This is very similar to the way asynchronous release patterns are handled in the code archetypes listed in [PV12; PV13a] except for the fact that they do not consider service requests which might result in results or exceptions that need to be sent back to the service requester [PV13a].

#### **Sporadic**

When the non-functional property set for the handling of the service on the provided interface side of the component offering the service is **Sporadic**, it is the responsibility

## 5. A programming model for OSRA

---

of the container, of the component providing the service, to safeguard this property. The sporadic property requires that two subsequent requests for the service needs to always be separated by no less but possibly more than a minimum guaranteed time span, known as the MIAT (Minimum Inter-Arrival Time) [Pan17; PV14]. The container makes use of tasking primitives such as a task channel, task event and a task from the Tasking framework for this purpose.

The general structure of the thread of control on the service provider end, necessary to handle sporadic service requests consists of a task with two synchronized task inputs, attached to the task as shown in Figure 5.2. The task inputs are not marked as final. One of the task inputs is associated with a task event, with absolute timing (fixed task wake-up times) and the other task input is associated with a normal task channel. The task event is configured to wake up the task periodically after every MIAT interval. The task input associated with a normal task channel is configured so that the task input is activated as soon as a push is made against its associated task channel. This task then is instantiated in the container of the service provider component.

When a provided interface port, promoted by the container of the component handling the request, receives a sporadic service release request, it intercepts the request and pushes the packaged data against the channel associated with the task.

Because the task inputs are not marked as final, the task is activated only after both its task inputs are activated. When activated, the functions of the task will then be to:

**Step 1** Unpack the packaged data

**Step 2** Acquire the semaphore provided by the Tasking framework associated with the service


**Step 3** Execute the desired service

**Step 4** Reset the task event attached to the task

**Step 5** Release the semaphore acquired

**Step 6** Return the results and the exceptions associated with the service request back to the service requester making use of the information of the service requester packaged by the required interface port

In this way, the non-functional properties associated with an asynchronous sporadic release pattern can be preserved at run-time.

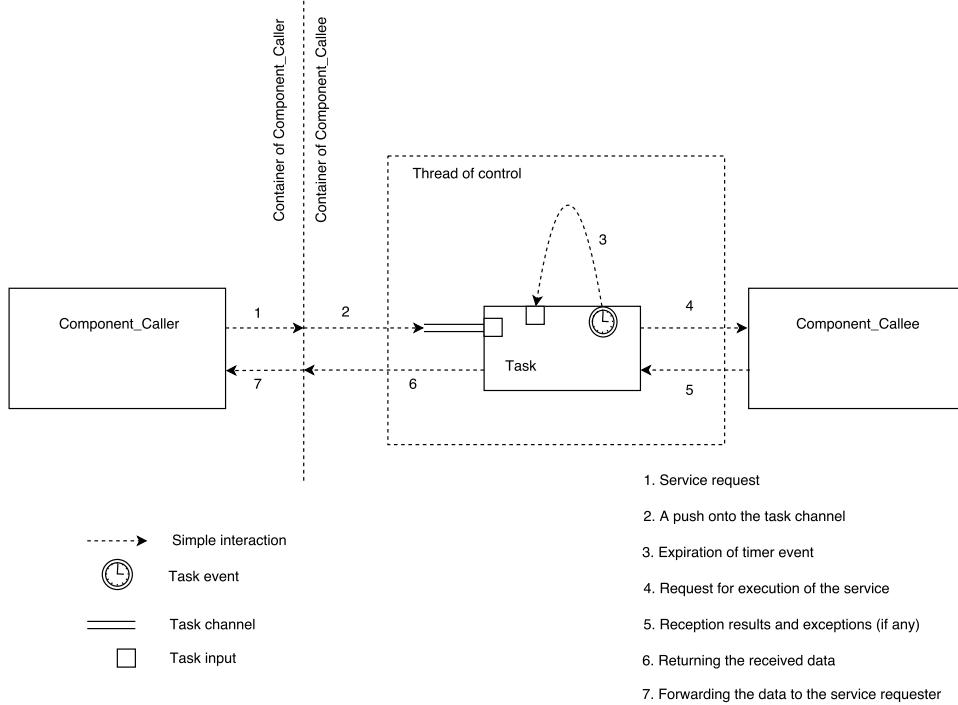

**Figure 5.2.: Thread of control for asynchronous sporadic release pattern**

## Protected

When the non-functional property set for the handling of the service on the provided interface side of the component offering the service is Protected, it is the responsibility of the container, of the component providing the service, to safeguard this property. The container makes use of tasking primitives such as a task channel and a task from the Tasking framework for this purpose.

The general structure of the thread of control on the service provider end, necessary to handle this kind of service requests, is a task with one task input attached to the task as shown in Figure 5.3. The task input is configured so that the task input is activated as soon as a push is made against its associated task channel.

When a provided interface port, promoted by the container of the component handling the request, receives a service release request of this kind, it intercepts the request and pushes the packaged data against the channel associated with the task. The task is then activated and the functions of the task will then be to:

**Step 1** Unpack the packaged data

**Step 2** Acquire the semaphore provided by the Tasking framework associated with the service

## 5. A programming model for OSRA


---

**Step 3** Execute the desired service

**Step 4** Release the semaphore acquired

**Step 5** Return the results and the exceptions associated with the service request back to the service requester making use of the information of the service requester packaged by the required interface port

In this way, the non-functional properties associated with an asynchronous protected release pattern can be preserved at run-time.

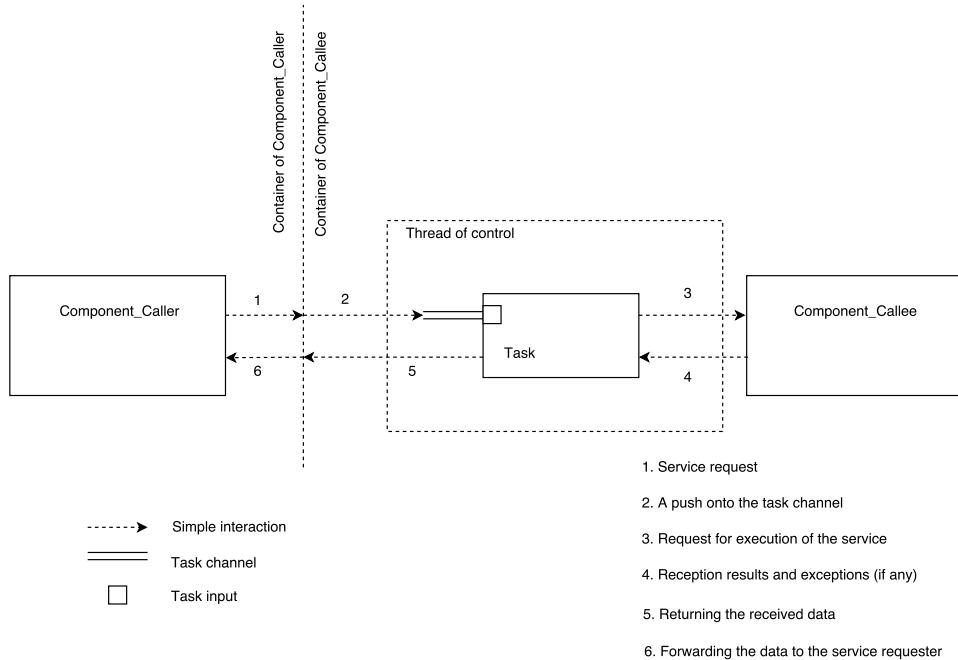

**Figure 5.3.: Thread of control for asynchronous protected release pattern**

### Bursty

When the non-functional property set for the handling of the service on the provided interface side of the component offering the service is **Bursty**, it is the responsibility of the container, of the component providing the service, to safeguard this property. The bursty property requires that a service can be activated at most a given number of times in a given interval called the bound interval [Pan17; PV14].

The general structure of the thread of control on the service provider end, necessary to handle this kind of service requests, is a task with two non-synchronized task inputs attached to it as shown in Figure 5.4. The task inputs are marked as final. One of the

task inputs is associated with a task event, with absolute timing (fixed task wake-up times) and the other task input is associated with a normal task channel. The task event is configured to wake up the task periodically after every bound interval. The task input associated with a normal task channel is marked as `final` indicating that the task input is activated as soon as a push is made against its associated task channel. The task also has an internal counting semaphore provided by the Tasking framework in order to keep a count of the number of service requests handled within the bound interval.

When a provided interface port, promoted by the container of the component handling the request, receives a service release request with bursty nature, it intercepts the request and pushes the packaged data against the channel associated with the task.

Because the task inputs are marked as final, the task is activated if any one of its task inputs are activated. When activated, the functions of the task will then be to:

**Step 1** Check the activated input. If the activated input is the one that is attached to a task event, then replenish the counting semaphore, restart the attached task event and go to step 8.

**Step 2** Unpack the packaged data

**Step 3** Acquire the counting semaphore local to the task which is used to enforce the max. number of activations within a bound interval

**Step 4** Acquire the semaphore provided by the Tasking framework associated with the service

**Step 5** Execute the desired service


**Step 6** Release the semaphore associated with the service

**Step 7** Return the results and the exceptions associated with the service request back to the service requester making use of the information of the service requester packaged by the required interface port

In this way, the non-functional properties associated with an asynchronous bursty release pattern can be preserved at run-time. It is important to note that the code archetypes which were developed for the CHESS project do not mention the scheme to handle this kind of release pattern [PV12; PV13a].

## 5. A programming model for OSRA

---

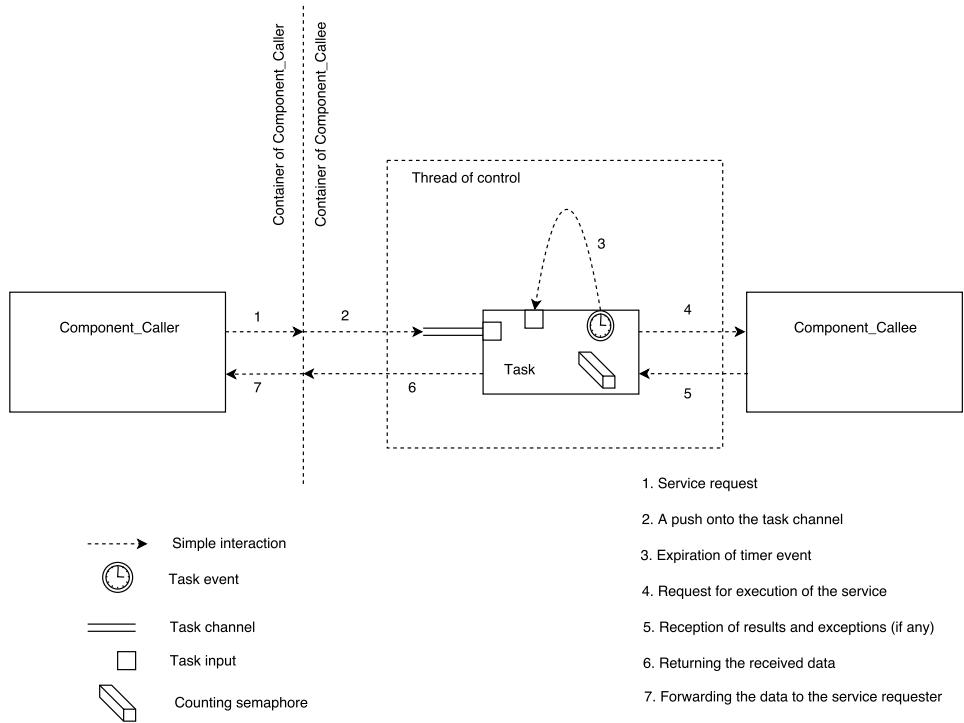

**Figure 5.4.:** Thread of control for asynchronous bursty release pattern

### Cyclic

When the non-functional property set for a service on the provided interface side of the component is **Cyclic**, it is the responsibility of the container of the component, to safeguard this property. Cyclic property requires that the associated service be activated periodically and with a non-zero initial offset [Pan17; PV14].

The general structure of the thread of control, necessary to handle this kind of non-functional property is a task with a task event, provided by the Tasking framework, attached to it as shown in Figure 5.5. The task event is configured to wake up the task periodically, with absolute timing (fixed task wake-up times). The task event can also be configured to wake up the associated task for the very first time with an initial offset.

When a provided interface port, promoted by the container of the component has a service which needs to be activated periodically, the task is activated and it performs the following functions:


**Step 1** Acquire the semaphore provided by the Tasking framework associated with the service

**Step 2** Execute the desired service

### Step 3 Release the semaphore acquired

The service with a cyclic nature cannot be requested from an external component [Pan17]. The services also need to be parameterless and cannot send out results or throw exceptions [Pan17].

In this way, the non-functional properties associated with an asynchronous cyclic release pattern can be preserved at run-time.

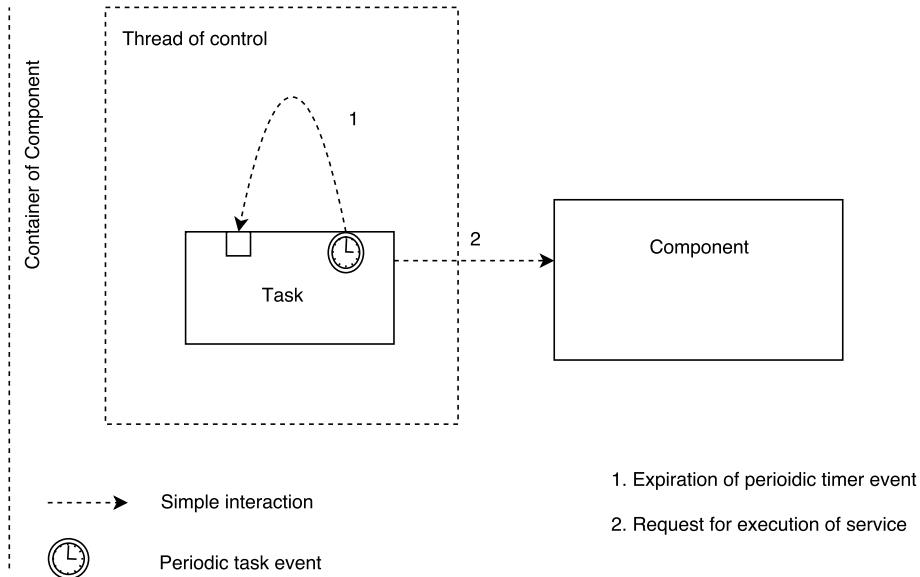

**Figure 5.5.:** Thread of control for asynchronous cyclic release pattern



## Chapter 6

# Infrastructural code generation

---

### 6.1. Introduction

After designing an OBSW model using the OSRA SCM model editor and following the component-based software development approach that comes with it, the OBSW model entities need to be mapped to the infrastructure code. The reference programming model for OSRA, discussed in the previous chapter helps us in progressing towards this goal. But, it is necessary to understand the overall design approach for the generated code and briefly present the abstractions that will be offered to the software supplier. This chapter, deals with these things in detail. Similar efforts from the Artemis JU CHESS project [PV12], provide the perfect base for discussions in this chapter of the Master thesis.

### 6.2. User model entities in the Platform Independent Model (PIM) phase

A detailed description of all the modeling entities that the software architect can use, can be found in the specification of the metamodel for the OSRA component model [Pan17]. However a brief description of them is noteworthy here:

**Datatypes** The software architect can create a set of project-specific data types and constants using the Data Types language unit of the CommonTypes metamodel and the language unit is designed to provide the software architect an expressive power comparable to the languages with strong types (e.g. Ada).[Pan17]. The supported type definitions are boolean types, integer types, float types, enumeration types, fixed point types, array types, structured types, string types, union types, alias

## 6. Infrastructural code generation

---

types, opaque types, external types and unconstrained types. Some of these data type definitions are obvious for readers with programming skills in typed languages such as Ada, C or C++.

**Interfaces** An interface is a specification of coherent set of services and it represents the definition of a contract. An interface is defined independently of the entities implementing it (e.g. Component type). An interface may enlist declaration of operations, which are the functional services that shall be offered by the entities implementing it. The services include a name, set of ordered parameters and one or more exceptions that they might throw when things go wrong during the handling of the service. Parameters are typed with one of the types mentioned above and have a mode (`in`, `out` or `inout`). A component type may expose one or more interfaces and the same interface can be exposed by different component types. An interface may also contain the declaration of one or more interface attributes, which are the parameters that are accessible via the interface implementations.

**Component type** A component type is an entity which specifies the external interfaces of a software component and are defined in isolation and are used to declare relationships with the other components and system in general. It conforms to the principle of encapsulation and as a consequence, all the interactions with other components are performed exclusively via its explicitly declared interface. A component type usually encompasses:

- A list of provided interface ports
- A list of required interface ports
- A list of dataset emitter ports
- A list of dataset receiver ports
- A list of event emitter ports
- A list of event receiver ports

**Component implementation** It is an entity that represents a concrete realization of a component type. It is functionally identical to the component type except that the source code is added to the component implementation and may also define number of component implementation attributes

**Component instance** It is an instantiation of a component implementation and hence contains all the instantiations of the structural features, such as provided and required interface ports. It also contains instantiation of all attributes (interface attributes, component type attributes and component implementation attributes). It is also the elementary deployment unit for the OBSW model [Pan17].

## 6.3. Mapping of design entities to the infrastructural code

As the generated code should target the Tasking framework, which is the target computational model in this Master thesis and because the Tasking framework is written in C++, the following sections explains mapping of design entities to the infrastructure code that will be generated in C++.

On analyzing the specifications of the metamodel for the OSRA component model [Pan17], it is clear that there are different corner cases that can arise during the construction of the OBSW models using OSRA component model and it is necessary that these corner cases are effectively handled in the software design for the infrastructural code. The following sections try to build an OHSW model keeping the the corners cases in mind and attempt to explain the overall design approach.

### 6.3.1. Corner cases arising during the construction of OHSW model using OSRA component model

The different corner cases which can arise are:

- Multiple provided interfaces which refer to the same interface type are promoted by the container of a component
- Multiple required interfaces which refer to the same interface type are subsumed by the container of a component
- Multiple interfaces provide exact same operations
- Multiple implementations per component type

The first and second corner cases are handled in the following example. But, the other cases will be treated directly in the later section, which deals with the software design for the generated infrastructure code.

### 6.3.2. An example OHSW model

Our simple OHSW model, yet effective to serve the intended purpose, is built as per the proposed component-based development approach explained in the section Section 3.2 in chapter Chapter 3. As already mentioned in that section, the component-based approach puts a lot of emphasis on the definition of component interfaces [PV14] and it is followed here as well. Components are built from scratch using newly defined

## 6. Infrastructural code generation

---

interfaces. All model entities defined here are instantiations of the modeling entities specified in the metamodel [Pan17]. The OBSW model is designed using the OSRA SCM model editor mentioned in the section Section 3.5 in chapter Chapter 3. The model entities from the OSRA SCM model editor can be exported as images and they are used in this sub-section for illustration purposes.

In this simple example, two simple components are designed. The first component requests for a service `OperationAdd` which can add two numbers, as the name suggests and this service is implemented in the second component. Another service namely `Call OperationAdd` is implemented in the first component, which can be requested to trigger the OBSW model. Different non-functional properties, as explained later in this section, are strewn on the required and provided interfaces of these components to make the already boring example, a bit more interesting and also to capture the above mentioned first and second corner cases in the example.

**Step 1: Definition of data types and events** As the Master thesis requires to emphasize more on effectively capturing interactions and concurrency semantics required for communication between the designed components, the data types chosen in this example are fairly simple. But it is important to note that the scheme of mapping of these simple data types to the infrastructural code (explained in the later sections), can be scaled to fairly complex data types as well. The data types, exception types and the event type used in this example are as shown in Figure 6.1


- Two data types namely `FixedLengthStringType` and `IntegerType` of type `UNSIGNED` are defined and they are named as `StringType` and `IntegerType` respectively
- Three exception types, named as `OperandException`, `MemoryException` and `OverflowException` are defined
- An Event type, which can be used for asynchronous notifications [Pan17] is instantiated and it is named as `FailureEvent`. Two event parameters are also instantiated as shown in Figure 6.1

**Step 2: Definition of interfaces** Two interface namely `InterfaceA` and `InterfaceB` are designed as shown in Figure 6.1. `InterfaceA` has only one single operation by name `CallOperationAdd` and `InterfaceB` has an operation by name `OperationAdd` and an interface attribute of data type `IntegerType` and named as `m_StatusValue`.

- The operation `CallOperationAdd` is a parameterless operation and it is intended to be the service which can in turn request the service which can add two numbers.

### 6.3. Mapping of design entities to the infrastructural code

- The operation OperationAdd in InterfaceB, as the name suggests, is intended to be the service which can add two numbers, send back the results and raise a pre-defined exception if necessary. It has three operation parameters and can throw different exceptions as mentioned in Figure 6.1.
- The interface attribute StatusValue in InterfaceB is of type CFG and it indicates that the interface attribute is a configurable parameter [Pan17]. As a result, two operations for the purpose of setting and getting the values of the interface attribute are defined.

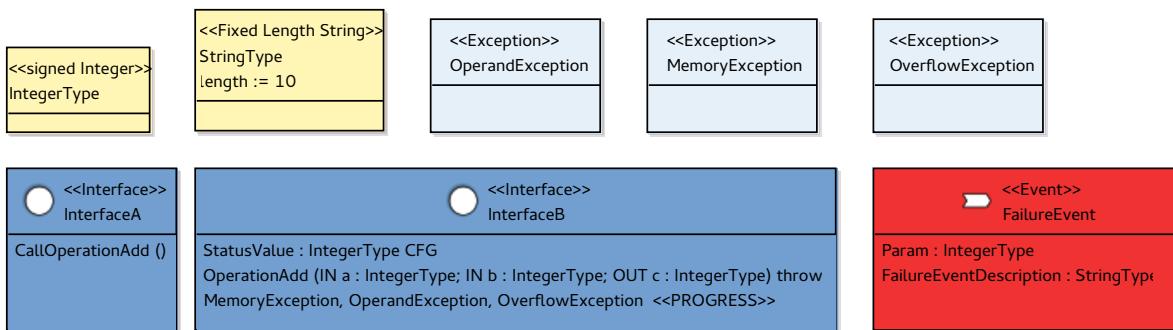

**Figure 6.1.:** Data types, events, exceptions and interfaces diagram

**Step 3: Definition of component types** Component types namely Component\_Caller and Component\_Callee which form the basis for a reusable software asset are defined as shown in the Figure 6.2.

Component\_Caller has:

- Provided interface port `ProvidedInterfacePort` which refers to `InterfaceA`
- Required interface port `RequiredInterfacePortType1` which refers to `InterfaceB`
- Required interface port `RequiredInterfacePortType2` which refers to `InterfaceB`
- Event receiver port `FailureEventReceiverPort` which refers to `FailureEvent`

The desired interaction kind for the operations in the required interface ports of Component\_Caller are as shown in the Table 6.1

**Table 6.1.:** Desired interaction kind for operations in the required interface ports


## 6. Infrastructural code generation

---

| Required interface ports   | Operations   | Interaction kind                             |
|----------------------------|--|--|
| RequiredInterfacePortType1 | OperationAdd<br>Interface attribute setter<br>Interface attribute getter | synchronous<br>synchronous<br>synchronous    |
| RequiredInterfacePortType2 | OperationAdd<br>Interface attribute setter<br>Interface attribute getter | asynchronous<br>asynchronous<br>asynchronous |

Component\_Callee has:

- Provided interface port ProvidedInterfacePort1 which refers to InterfaceB
- Provided interface port ProvidedInterfacePort2 which refers to InterfaceB
- Event emitter port FailureEventEmitterPort which refers to FailureEvent

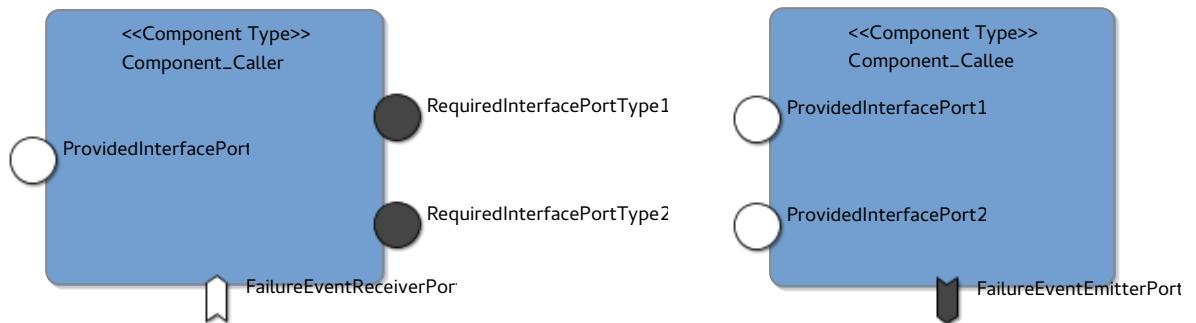

**Figure 6.2.: Component types diagram**

**Step 4: Definition of component implementations** Component implementations are created from the component types.

Component\_Caller has one component implementation named as Component\_Caller\_impl and Component\_Callee has one component implementation named as Component\_Callee\_impl. The component implementation Component\_Callee\_impl implements the means to store the attribute Param of InterfaceB, that is exposed through its provided interface ports, namely ProvidedInterfacePort1 and ProvidedInterfacePort2.


No maximum memory footprint for component implementations are defined or no detailed design activity of the component implementations are performed as they are not of concern in this Master thesis.

**Step 5: Definition of component instances** The component instances are the instances of component implementations [PV14].

Two component instances as shown in Figure 6.3 are defined, namely:

- Component\_Caller\_impl\_inst which is an instantiation of Component\_Caller\_Impl
- Component\_Callee\_Impl\_inst which is an instantiation of Component\_Callee\_Impl

**Step 6: Definition of component bindings** Component bindings as shown in Figure 6.3 are defined:

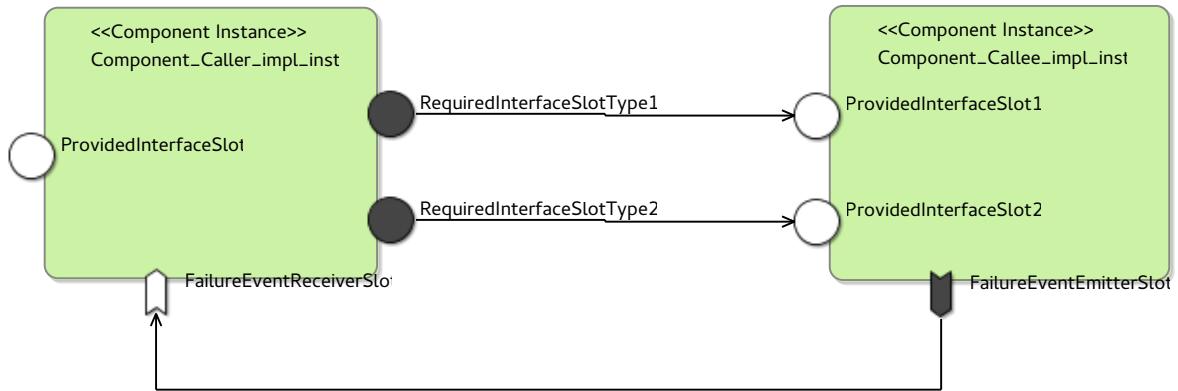

**Figure 6.3.: Component instances diagram**

**Step 7: Specification of non-functional attributes** The non-functional properties are defined on the component instances and the component bindings defined in the previous step. The non-functional properties language unit of the specification of a metamodel provides a Value Specification Language (VSL) unit, which permits the specification of the non-functional properties qualified with a measurement unit [Pan17]. VSL is used here to define values of non-functional properties with a measurement unit.

For the provided interface slot in the component instance Component\_caller\_Impl\_inst, the following non-functional property is specified as shown in Table 6.2

**Table 6.2.: Non-functional property for the operation in the provided interface slot**

## 6. Infrastructural code generation

---

| Provided interface slot | Operation        | Non-functional property |
|-------------------------|------------------|-------------------------|
| ProvidedInterfaceSlot   | CallOperationAdd | Cyclic, Period = 2s     |

For the provided interface slots in the component instance `Component_callee_impl_inst`, the following non-functional properties are specified as shown in Table 6.3

**Table 6.3.:** Non-functional properties for the operations in the provided interface slots

| Provided interface slots | Operations   | Non-functional properties                     |
|--------------------------|--|---|
| ProvidedInterfaceSlot1   | OperationAdd<br>Interface attribute setter<br>Interface attribute getter | Protected<br>Protected<br>Unprotected         |
| ProvidedInterfaceSlot2   | OperationAdd<br>Interface attribute setter<br>Interface attribute getter | Sporadic, MIAT = 2s<br>Protected<br>Protected |

It is important to note that the WCET and deadline values for the operations in the provided interface slots are not handled, as the safeguarding of these properties are not of concern in this Master thesis.

For the event receiver slot in the component instance `Component_caller_impl_inst`, the following non-functional property is specified as shown in Table 6.4

**Table 6.4.:** Non-functional property for event reception


| Event receiver slot      | Event        | Non-functional property |
|--------------------------|--------------|-------------------------|
| FailureEventReceiverSlot | FailureEvent | Protected               |

**Step 8: Definition of the physical architecture** The hardware topology provides a description of the system hardware. As hardware modeling is not of concern in this Master thesis, a simple hardware topology as shown in Figure 6.4 is considered.

A processor board with a processor and a processor core is instantiated. Two connection docks are attached to the processor board and a bus is used to connect the connection docks. The component instances are deployed on the processor core and the component bindings are deployed on the bus.

This OHSW model is subjected to model validation against the OSRA Specification Compliance and the SCM meta-model compliance, in the OSRA SCM editor [EO16].

### 6.3. Mapping of design entities to the infrastructural code

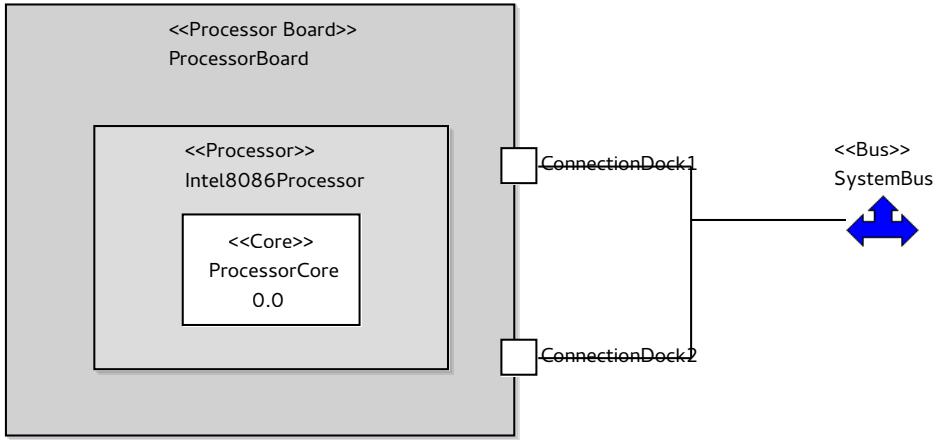

**Figure 6.4.:** Hardware topology diagram

Only after the OBSW model is successfully validated, can the OBSW model be considered as a suitable candidate for automatic generation of infrastructure code [EO16].

#### 6.3.3. Software design approach for the generated code

This section deals with the software design approach for the generated infrastructure code. UML class diagrams, wherever appropriate are judiciously used in this section to show a high level representation of the generated C++ classes and datastructures.

Each of the following sub-sections, is divided into two parts:

- The first part throws light on the idea of how a mapping of a given model entity to an infrastructural code entity can be done
- The second part makes the approach clear by taking the reference of our OBSW example model discussed in the previous section

#### Namespaces

Namespaces from C++ are used to differentiate component types, component implementations etc. of different components. The names for the namespaces are obtained from the names of the component types in the OBSW model.

**For our example OBSW model:** Three namespaces, namely General, Component\_Caller and Component\_Callee are created.

## 6. Infrastructural code generation

---

### Data types and events

A data type from the OBSW model is translated into simple `typedef` statement from C++.


#### For our example OBSW model:

- The data type `IntegerType`, is translated to `typedef int8_t IntegerType`
- The data type `StringType`, is translated to `typedef std::string StringType`

A subset of all possible data types from the OSRA Component Model can be translated to simple `typedef` statements as shown above. More information about the subset of data types for which this successfully works is given in the next chapter.

The exception types from the OBSW models are translated into simple enumeration literals from C++. These exceptions, which can be thrown by a particular operation are grouped under an enumeration. This enumeration is further instantiated in a C++ struct.

**For our example OBSW model:** The three exceptions `OperandException`, `MemoryException` and `OverflowException` are translated to enumeration literals. These exceptions can be thrown by `OperationAdd`, which is defined in `InterfaceB`. Hence the enumeration literals, corresponding to the exceptions, are stored together as an enumeration named `OperationAddException_InterfaceB` as shown in the Figure 6.5. This exception is further instantiated in a C++ struct `OperationAddReport_InterfaceB` as shown in the Figure 6.5

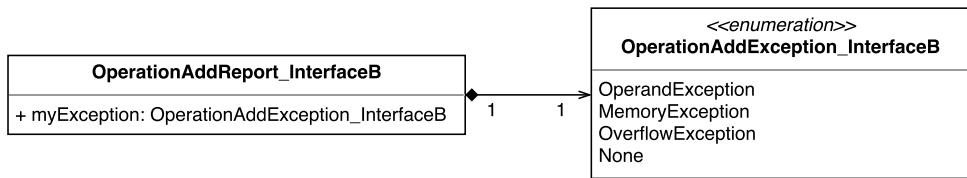


**Figure 6.5.:** UML class diagram representation for exceptions in the example OBSW model

An event from the OBSW model is mapped to an abstract base class and a corresponding concrete implementation class. Appropriate setters and getters for the event parameters are declared as pure virtual methods in the abstract base class for the event and they are implemented in their corresponding concrete implementation.

**For our example OBSW model:** The `FailureEvent` is mapped as an abstract base class named `FailureEventInterface` and concrete implementation class named `FailureEvent`. Appropriate setters and getters for the event parameters `Param` and

### 6.3. Mapping of design entities to the infrastructural code

`FailureEventDescription` are declared as pure virtual methods in the `FailureEventInterface` abstract base class and implemented in the `FailureEvent` concrete implementation class. An UML class diagram representation of the generated classes are as shown in Figure 6.6.

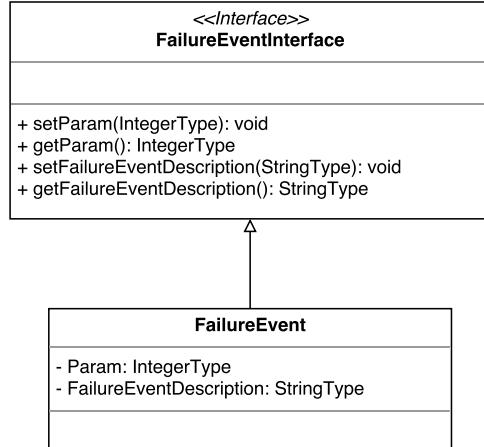

**Figure 6.6.:** UML class diagram representation for event in the example OBSW model

All the infrastructure code entities mentioned above are present in the namespace `General`.

## Interfaces

An interface can be mapped to a C++ abstract base class, as in [PV12]. Constituents of this abstract base class are:

- For each interface operation, corresponding operation parameters and corresponding data types of the operation parameters, a pure virtual method is declared in the interface class. The names and data types of the input parameters for this pure virtual method corresponds to the names and data types of the interface operation parameters. The operation parameters, with `ParameterDirectionKind` as `in` are translated to constant references and the operation parameters with `ParameterDirectionKind` as `out` or `inout` are translated to plain references.
- For each interface attribute parameter of type `CFG`:
  - A class variable of name and data type corresponding to the name and data type of interface attribute is added


## 6. Infrastructural code generation

---

- Pure virtual setter and getter methods for the interface attribute are declared.  
The data types and names of the input parameters in the setter and getter methods mimic the name and data type of the interface attribute.
- For each interface attribute parameter of type MIS, which is fixed once and for all and is not variable [Pan17]:
  - A const class variable of name and data type corresponding to the name and data type of interface attribute is added
  - No getter and setter methods are added
- For each interface attribute of type DAT, which are modifiable by the component only and not by external entities [Pan17]:
  - A class variable of name and data type corresponding to the name and data type of interface attribute is added
  - No getter and setter methods are added

**For our example OBSW model** The C++ classes shown in Figure 6.7 are generated:

- InterfaceA along with the operation CallOperationAdd is mapped to an abstract base class InterfaceA with a pure virtual method CallOperationAdd.
- InterfaceB has one operation OperationAdd and one interface attribute parameter StatusValue of type CFG. These are mapped to an abstract base class named InterfaceB with the following pure virtual methods:
  - OperationAdd with two input parameters of type const IntegerType& and one input parameter of type IntegerType&
  - getter method for the interface attribute StatusValue with an input parameter of type IntegerType&
  - setter method for the interface attribute StatusValue with an input parameter of type const IntegerType&

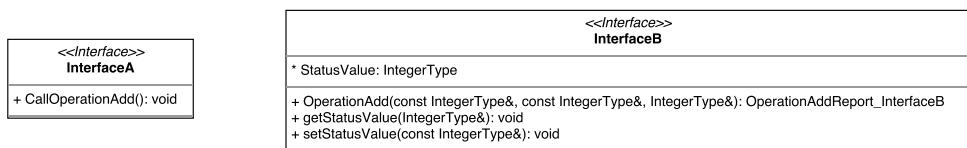

**Figure 6.7.: UML class diagram representation for interfaces in the example OBSW model**

### 6.3. Mapping of design entities to the infrastructural code

---

**Listing 6.1** Code excerpt from the generated code for InterfaceA\_Helper

---

```

class InterfaceA {
public:
    InterfaceA(){}
    virtual ~InterfaceA(){}
    virtual void callOperationAdd(void) = 0;
};


class InterfaceA_Helper: public InterfaceA {
public:
    InterfaceA_Helper(){}
    virtual ~InterfaceA_Helper(){}
    virtual void callOperationAdd_InterfaceA(void) = 0; //New pure virtual method
    virtual void callOperationAdd(void)final {return (callOperationAdd_InterfaceA());}
};

```

---

Because of the corner case that multiple interfaces can have exactly same operations, it is necessary to refine these interfaces using the interface helper abstract base classes as shown in Figure 6.8. In each interface helper class:

- Implementations for all the inherited pure virtual methods from the parent interface are provided
- The implementations consist of simple method calls to new pure virtual methods
- These new pure virtual methods have method signatures similar to the inherited and implemented pure virtual methods. However, it is important to note that the names of these new pure virtual methods are different from the inherited pure virtual methods, as shown in the Listing 6.1

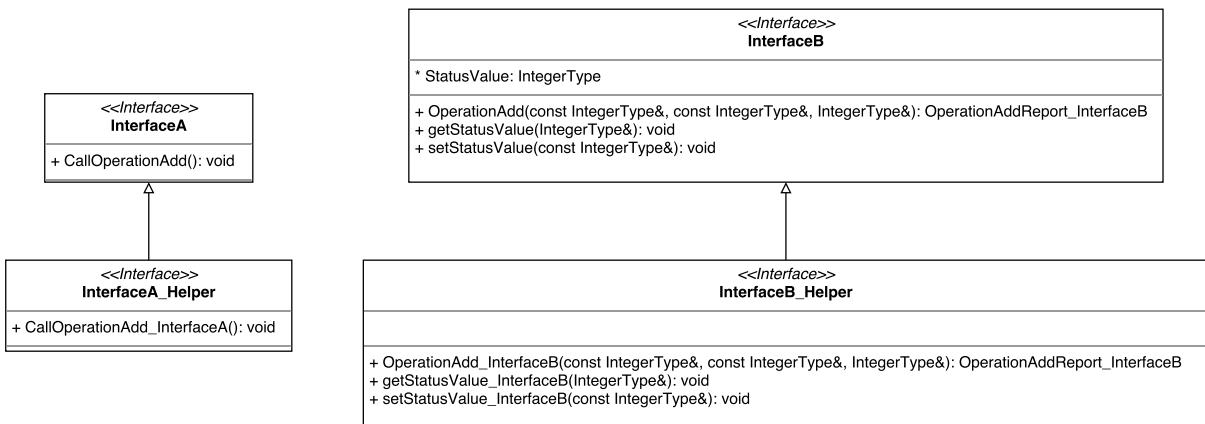

**Figure 6.8.: UML class diagram representation for interface helpers in the example OBSW model**

## 6. Infrastructural code generation

---

**For our example OBSW model:**

- `InterfaceA_Helper` is defined, which inherits from the interface `InterfaceA` and which implements the pure virtual method in the parent interface `InterfaceA`. The implementation contains a simple call to a new pure virtual method added to the original method name from the parent interface as shown in the Listing 6.1.
- `InterfaceB_Helper` is defined, which inherits from the interface `InterfaceB` and which implements all the pure virtual methods in the parent interface `InterfaceB`. Each implementation contain a simple call to the new pure virtual methods added. The `InterfaceB_Helper` class is designed and implemented the same way as `InterfaceA_Helper` is designed in the code excerpt in Listing 6.1

The combined effect is that now, more than one original parent interfaces (resembling model entities) can have same operations and interface attributes. The refined interfaces redefine the methods from the original parent interfaces, so that there are no confusions between operations from different interfaces. Of course, a straight forward solution would have been to incorporate the concept of namespaces from C++, but it is not suitable for this design and the reason is explained later in this section.

For each interface operation and interface attribute in an interface, a C++ struct is defined to carry around the values of the operation parameters or the values of the interface attributes. These data structures come in handy, when the interface operations or interface attribute access operations need to be accessed asynchronously. The data structures also hold general purpose polymorphic function wrappers from C++11 standard to store the call-back functions.

**For our example OBSW model:**

- A struct `OperationAddStruct_InterfaceB` is defined as shown in Figure 6.9
- A struct `StatusValueStruct_InterfaceB` is defined as shown in Figure 6.9

All the infrastructure code entities mentioned above are present in the namespace `General`.

### Parameter channels and parameter queues

The data structures which are defined to carry around the values of the operation parameters or values of the interface attributes, need to be pushed onto parameter channels, each one of which is supported in the back end by corresponding parameter queue.

### 6.3. Mapping of design entities to the infrastructural code


| OperationAddStruct_InterfaceB   |
|---|
| a: IntegerType<br>b: IntegerType<br>c: IntegerType<br>callBackFunctionPtr: std::function <void(General::OperationAddStruct_InterfaceB, General::OperationAddReport_InterfaceB)> |

| StatusValueStruct_InterfaceB  |
|---|
| a: IntegerType<br>callBackFunctionPtr: std::function<void(General::StatusValueStruct_InterfaceB)> |

**Figure 6.9.:** UML class diagram representation of data structures for interface operation and interface attribute in the example OBSW model

**For our example OBSW model:** ParameterChannel and ParameterQueue C++ classes as shown in Figure 6.10 are defined. These classes can be reused for any OBSW model.

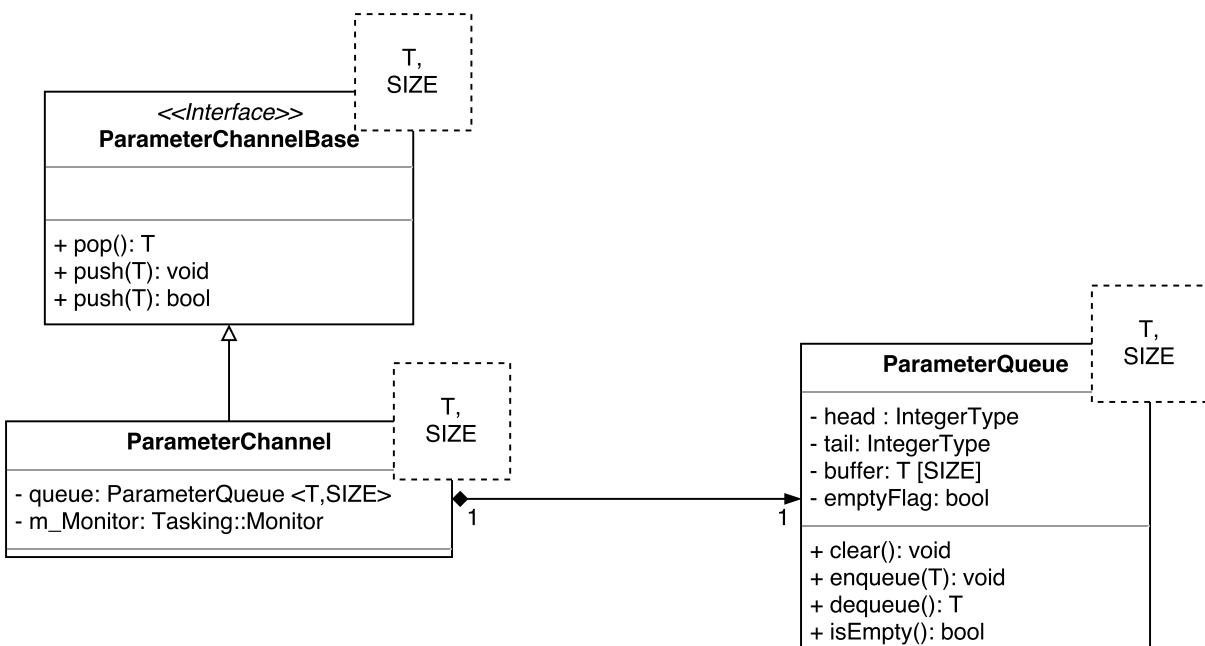

**Figure 6.10.:** UML class diagram representation of parameter channel and parameter queue in the example OBSW model

All the infrastructure code entities mentioned above are present in the namespace General.

## 6. Infrastructural code generation


---

### Event emitter ports and event receiver ports


The event emitter port for a particular event is mapped as an abstract base class and a corresponding concrete implementation class in C++. The event receiver port for a particular event is mapped only as an abstract base class. The abstract base class for event receiver port also contains pure virtual methods in order to safely interleave the reception of events.

**For our example OBSW model:** The FailureEventEmitterPort is mapped as a pair of abstract base class and a concrete implementation class as shown in Figure 6.11.

**For our example OBSW model:** The FailureEventReceiverPort is mapped to an abstract base class as shown in Figure 6.12.

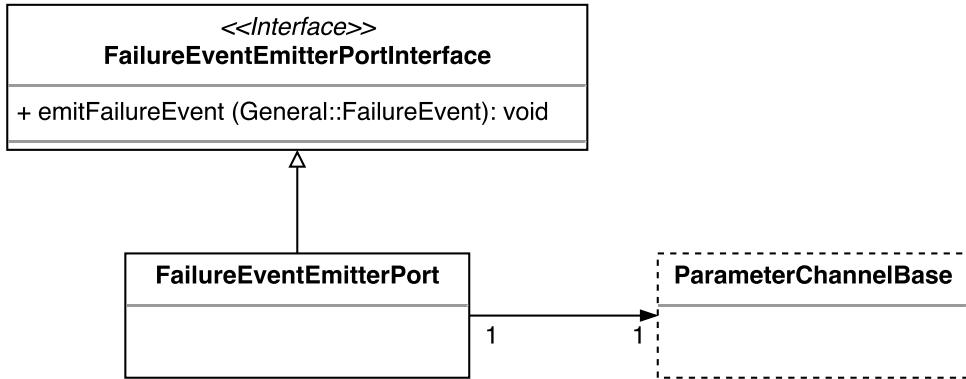

**Figure 6.11.:** UML class diagram representation of event emitter port in the example OBSW model

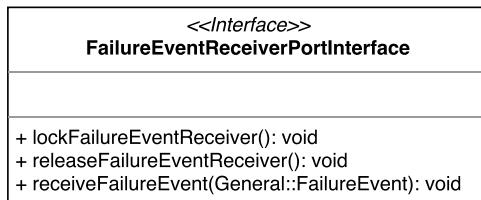

**Figure 6.12.:** UML class diagram representation of event receiver port in the example OBSW model

The **FailureEventEmitterPortInterface** and **FailureEventEmitterPort** classes are defined in the namespace **Component\_Callee**.

The **FailureEventReceiverPortInterface** is defined in the namespace **Component\_Caller**.

#### Component types

A component type can be mapped to an abstract base class in C++. A component type must provide all the operations that are listed in the provided interfaces of the component [PV14]. Hence it inherits from all the interface helper classes which are referenced by its provided interfaces as in [PV12]

This is where interface helper classes, with redefined operations come in handy, because C++ does not distinguish between operations with same signatures, although they are inherited from different namespaces. A component type must also inherit from the mapped abstract base classes for event receiver ports.


A component type must also have pure virtual methods which obtain and release the semaphores for the concurrent access of different operations that it provides. In addition to these, pure virtual methods need to be added, which act as call-back functions for the operations, that the component type's required interface ports request to be released asynchronously.

#### For our example OBSW model:


- As shown in Figure 6.13 `ComponentType` in the namespace `Component_Caller` inherits from the `InterfaceA_Helper` and also inherits from the abstract base class `FailureEventReceiverPortInterface`. It has pure virtual methods meant for:
  - Obtaining and releasing of semaphores for concurrent accesses of the operation `CallOperationAdd_InterfaceA`
  - Call-back function for the operation `OperationAdd`
  - Call-back function for the getter operation of the interface attribute `StatusValue`
- As shown in Figure 6.14 `ComponentType` in the namespace `Component_Callee` inherits from the `InterfaceB_Helper`. It has pure virtual methods meant for:
  - Obtaining and releasing of semaphores for concurrent access of the operation `OperationAdd_InterfaceB`
  - Obtaining and releasing of semaphores for concurrent access of the setter and getter operations for the interface attribute `StatusValue`

## 6. Infrastructural code generation

---

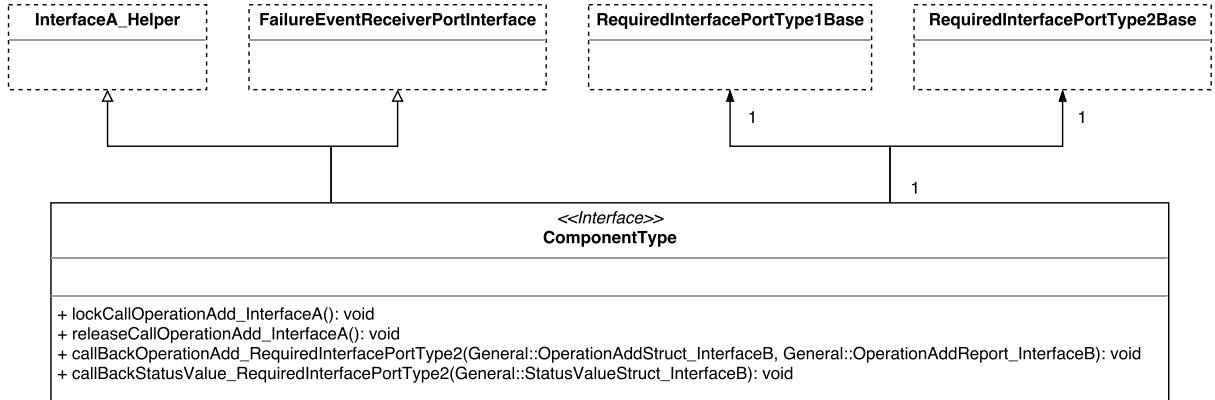

**Figure 6.13.:** UML class diagram representation of component type for `Component_Caller` in the example OBSW model

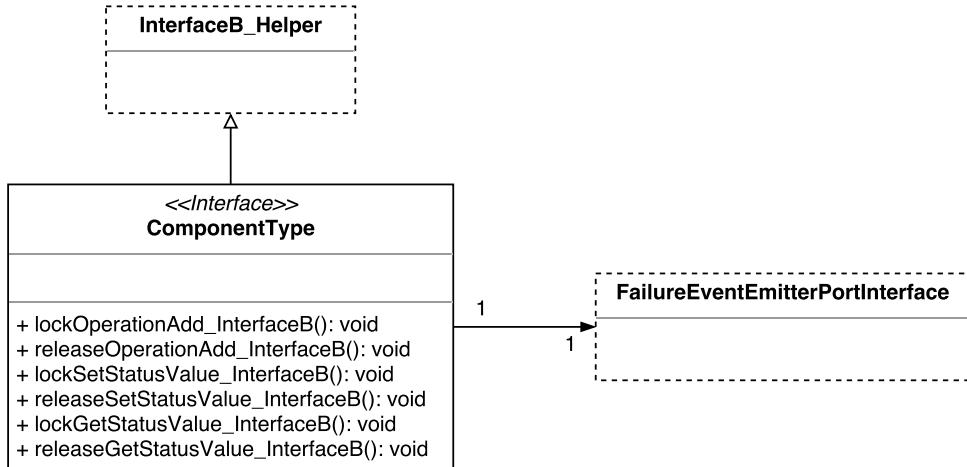

**Figure 6.14.:** UML class diagram representation of component type for `Component_Callee` in the example OBSW model

### Required interface ports

A required interface port is mapped as an abstract base class and a corresponding concrete implementation class in C++. The required interface subsumed by a particular component type has various operations that it might request and each operation has information specified whether the required interaction kind is synchronous or asynchronous [Pan17; PV14].

Each required interface port refers to one interface type and for each operation in the required interface port, a pure virtual method is added to the abstract base class. The signatures of these methods depend on whether the operations would be requested with an asynchronous release pattern or synchronous release pattern.

### 6.3. Mapping of design entities to the infrastructural code

---

**Listing 6.2** Code excerpt from the generated code for requesting service OperationAdd in RequiredInterfacePortType1

```
General::OperationAddReport_InterfaceB RequiredInterfacePortType1::OperationAdd (const
    IntegerType& a, const IntegerType& b, IntegerType& c) {
    General::OperationAddReport_InterfaceB myReport;
    myReport = m_targetProvidedInterfacePort.OperationAdd(a, b, c); //Simple method call
    return myReport;
}
```

---

In case of interface operations:

- If the desired interaction kind for the operation is synchronous, then the signature of the method in the abstract base class is same as the corresponding method in the abstract base class for the interface, as shown in Figure 6.15.
- If the desired interaction kind for the operation is asynchronous, then the signature of the method in the abstract base class bears no resemblance to the corresponding method in the abstract base class for the interface. It is changed as shown in Figure 6.16 to replace the out and inout parameters with a single pointer to the desired call-back function

In case of interface attributes:

- For the setter operation, signature of the method in the abstract class is same as the corresponding method in the abstract base class for the interface, as shown in Figure 6.15 and Figure 6.16
- If the desired interaction kind for the getter operation is synchronous, then the signature of the method in the abstract class is same as the corresponding method in the abstract base class for the interface, as shown in Figure 6.15.
- If the desired interaction kind for the getter operation is asynchronous, then the signature of the method in the abstract base class bears no resemblance to the corresponding method in the abstract base class for the interface. It is changed as shown in Figure 6.16 to replace the method parameter with a single pointer to the desired call-back function

The concrete implementation for the method (as shown in code excerpt in Listing 6.2) is fairly simple, if the desired interaction kind for the corresponding operation is synchronous. The implementation consists of a simple method call to the corresponding operation in the abstract base class of the bound provided interface port.

The concrete implementation for the method (as shown in code excerpt in Listing 6.3) is fairly complex, if the desired interaction kind for the corresponding operation is asynchronous. It would do the following things:

## 6. Infrastructural code generation

---

**Listing 6.3** Code excerpt from the generated code for interface attribute StatusValue access in RequiredInterfacePortType2

---

```
void
RequiredInterfacePortType2::getStatusValue(callBackStatusValue_RequiredInterfacePortType2
callBackFunctionPtr) {
    StatusValueStruct_InterfaceB myStruct;
    myStruct.callBackFunctionPtr =
        std::bind(callBackFunctionPtr,m_myCallerInstance,std::placeholder::_1);
    m_targetProvidedInterfaceSlot.getStatusValue_Receiver(myStruct); //Simple method
    call
}
```

---

- Make local copies of all the method parameters (if any)
- Pack them in the instances of data structures designed to carry the corresponding parameters
- Simple method call to the corresponding operation in the abstract base class of the bound provided interface port

It is obvious that local copies of the method parameters need to be made because the desired interaction kind is asynchronous.


**For our example OBSW model:** The following C++ classes are defined:

- RequiredInterfacePortType1Base abstract base class and its corresponding RequiredInterfacePortType1 concrete implementation class.
- RequiredInterfacePortType2Base abstract base class and its corresponding RequiredInterfacePortType2 concrete implementation class


The RequiredInterfacePortType1Base and RequiredInterfacePortType2Base have pure virtual methods as per the general description and they have to be implemented in the concrete implementation classes RequiredInterfacePortType1 and RequiredInterfacePortType2 respectively. The concrete implementations are in line with the description as in the general case above.

All the C++ classes mentioned above are present in the namespace Component\_Caller. As the component type Component\_Callee does not have any required interface ports, no C++ classes related to required interface ports are defined in the namespace Component\_Callee.

### 6.3. Mapping of design entities to the infrastructural code

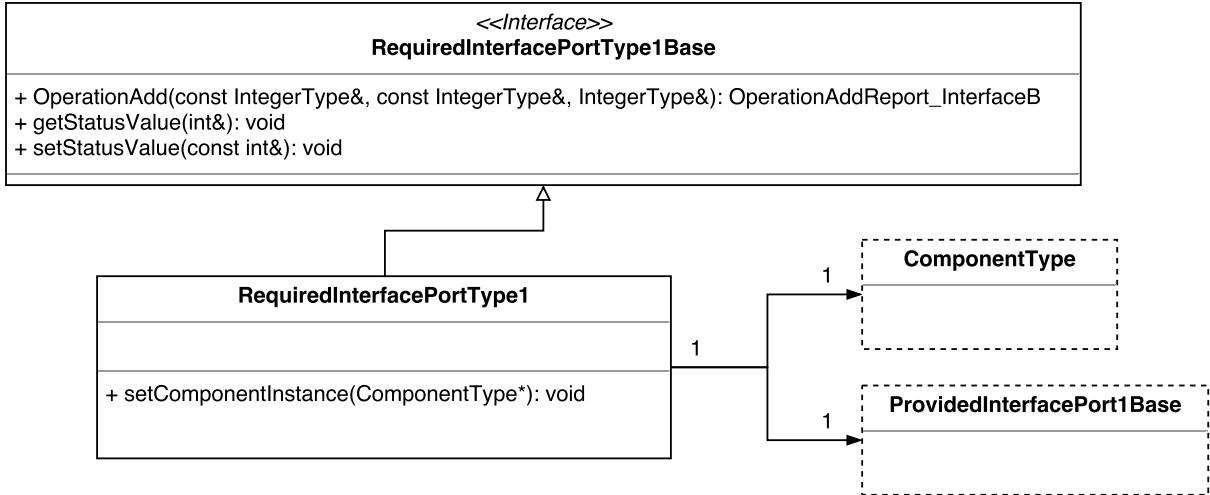

**Figure 6.15.:** UML class diagram representation of RequiredInterfacePortType1 for Component\_Caller in the example OBSW model

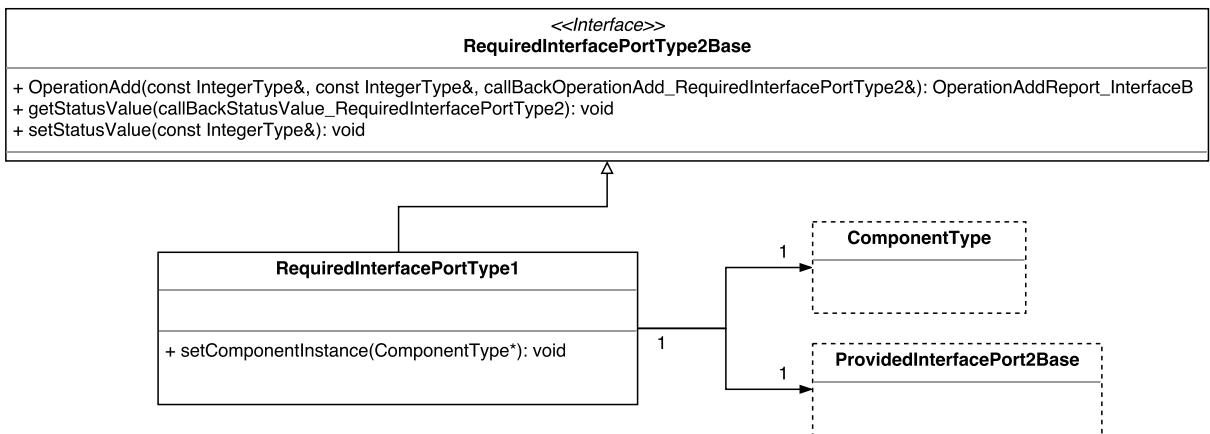

**Figure 6.16.:** UML class diagram representation of RequiredInterfacePortType2 for Component\_Caller in the example OBSW model

### Component implementations

A component implementation can be mapped in C++ as a concrete implementation of its abstract component type base class, as in [PV12]. It implements all the pure virtual methods that are inherited from its component type. It also has actual instances of semaphores for allowing safe concurrent accesses to the implemented methods and for safe interleaving between concurrent receptions of events of the same type.

In case of components that promote multiple provided interface ports which refer to the same interface type, it is necessary to provide multiple implementations for the

## 6. Infrastructural code generation

---

operations in the provided interfaces. In order to solve this problem a class hierarchy as shown in Figure 6.18 is needed:


- A component implementation abstract base class is designed which contains implementations for inherited pure virtual methods related to acquiring and releasing of semaphores.
- Component implementation abstract base class is further extended by dummy abstract base classes. A dummy base class is added for each of the provided interface ports which refer to the same interface type
- These dummy abstract base classes are extended by concrete implementation classes which provide different concrete implementations for all the inherited operations except the ones, which are already implemented in the component implementation abstract base class
- As it is a necessity to have only one instantiable concrete implementation per component [Pan17; PV12; PV14], all the concrete implementations are inherited one last time in a component implementation class. This instance is now deployable on the hardware platform

For our example OBSW model:

- `ComponentImplementation` concrete implementation class in the namespace `Component_Caller` inherits from the abstract base class `Component_Type` in namespace `Component_Callee` as shown in Figure 6.17. It provides implementation for all the inherited pure virtual methods
- Because the `ComponentType` in the namespace `Component_Callee` has two provided interface ports namely, `ProvidedInterfacePort1` and `ProvidedInterfacePort2`, which refer to `InterfaceB`, the following classes as shown in Figure 6.18 are created in the namespace `Component_Callee`:
  - `ComponentImplementationBase` which is an abstract base class, but provides implementation for inherited pure virtual methods related to acquiring and releasing of semaphores
  - `ComponentImplementationProvidedInterface1Base` and `ComponentImplementationProvidedInterface2Base` which are two dummy abstract base classes
  - `ComponentImplementationProvidedInterface1` and `ComponentImplementationProvidedInterface2` which provide different implementations for all the inherited operations except the ones implemented in `ComponentImplementationBase`

### 6.3. Mapping of design entities to the infrastructural code

- ComponentImplementation which inherits from both ComponentImplementationProvidedInterface1 and ComponentImplementationProvidedInterface2

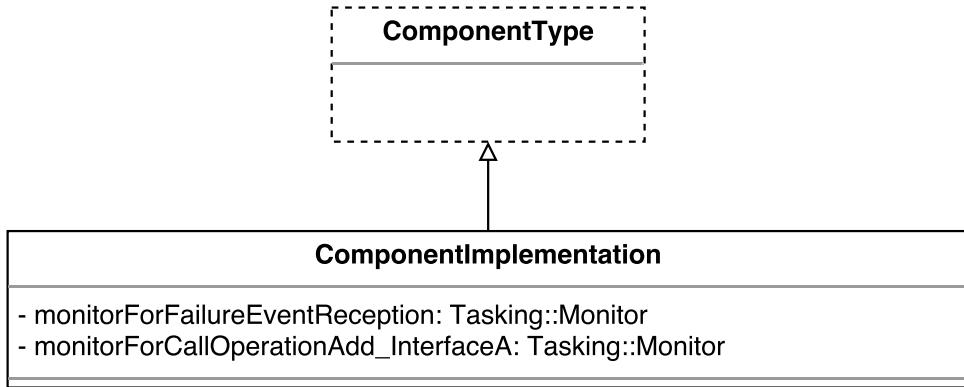

**Figure 6.17.:** Code excerpt from the generated code for interface attribute StatusValue access in RequiredInterfacePortType2

#### Provided interface ports


A provided interface port is mapped to an abstract base class and a corresponding concrete implementation class as shown in Figure 6.19 and Figure 6.20. The provided interface promoted by a particular component type has various operations that are provided and each operation has a desired release pattern attached as a non-functional/extraneous-functional property [Pan17; PV14]. Each provided interface port refers to one interface type and for each operation in the provided interface port, a pure virtual method is added to the abstract base class. The signatures of these methods depend on whether these operations are requested with a synchronous release pattern or an asynchronous release pattern.

In case of interface operations:

- If the interface operation on the provided interface is expected to be called synchronously, then the signature of the method in the abstract base class is same as the corresponding method in the abstract base class for the interface, as shown in Figure 6.19 for OperationAdd
- If the interface operation on the provided interface is expected to be called asynchronously, then the signature of the method in the abstract base class is changed as shown in Figure 6.20 for OperationAdd, to accept a data structure designed to carry the values of the parameters for the operation along with a function-wrapper for the call-back function

## 6. Infrastructural code generation

---

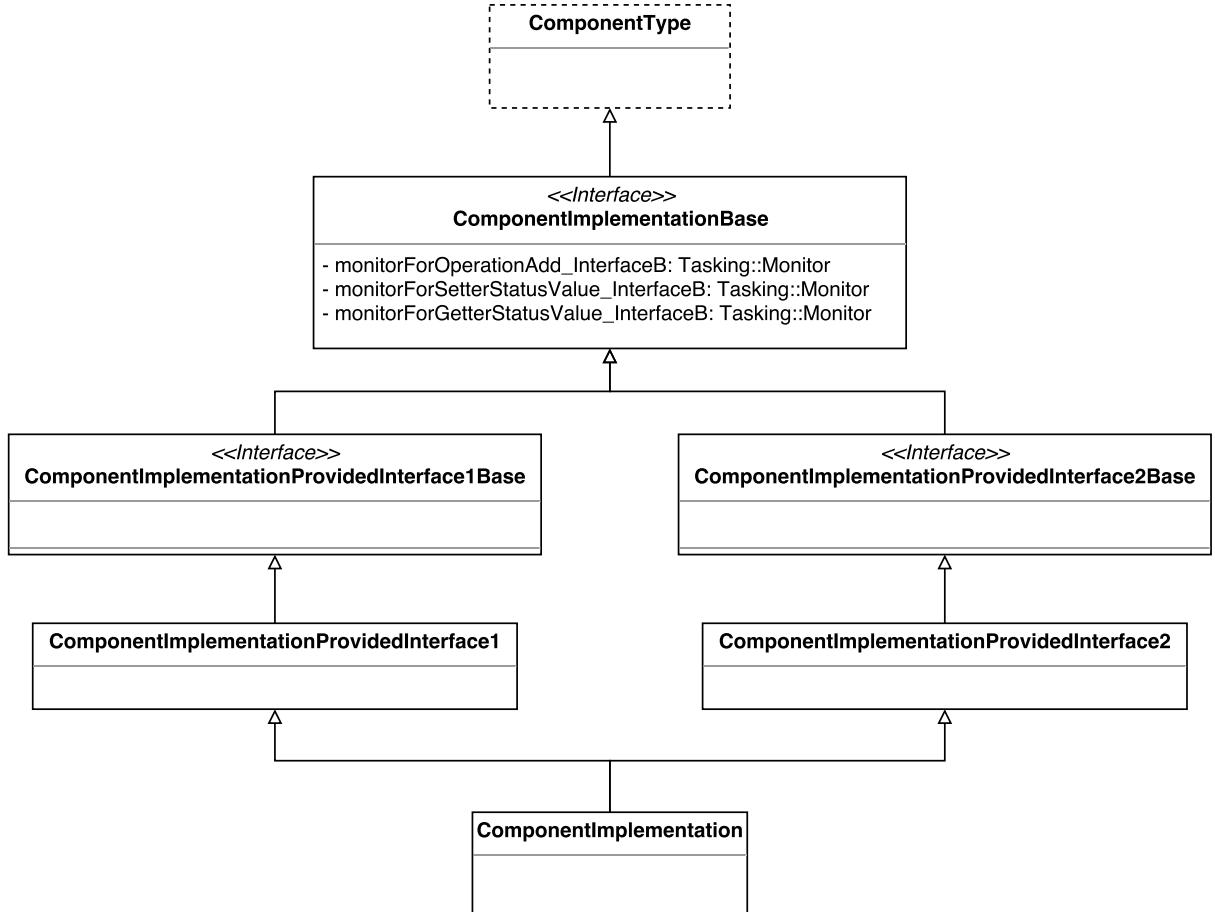

**Figure 6.18.:** Code excerpt from the generated code for interface attribute `StatusValue` access in `RequiredInterfacePortType2`


In case of interface attributes:

- For the operations which set and get the values of the interface attributes synchronously, the signatures of the methods in the abstract base class are same as the corresponding method in the abstract base class for the interface
- For the operations which set and get the values of the interface attributes asynchronously, the signatures of the methods in the abstract base class are changed to accept a data structure designed to carry the values of the interface attribute, as shown in Figure 6.20. The data structure would also contain a valid function-wrapper for the call-back function in case of getter operation for the interface attribute.


The following additional pure virtual methods are added to the abstract class for a provided interface port:

### 6.3. Mapping of design entities to the infrastructural code

- For each interface operation and interface attribute setter/getter operation which is called asynchronously, an additional pure virtual method is added to store the address of the task channel, to which the data structure corresponding to the operation needs to be pushed
- For storing the reference to their corresponding component implementation base class as shown in Figure 6.19 and Figure 6.20
- As shown in Figure 6.21, for storing the reference of the task from tasking framework which is responsible for periodically requesting the service in the provided interface port which has the interaction kind set to cyclic.

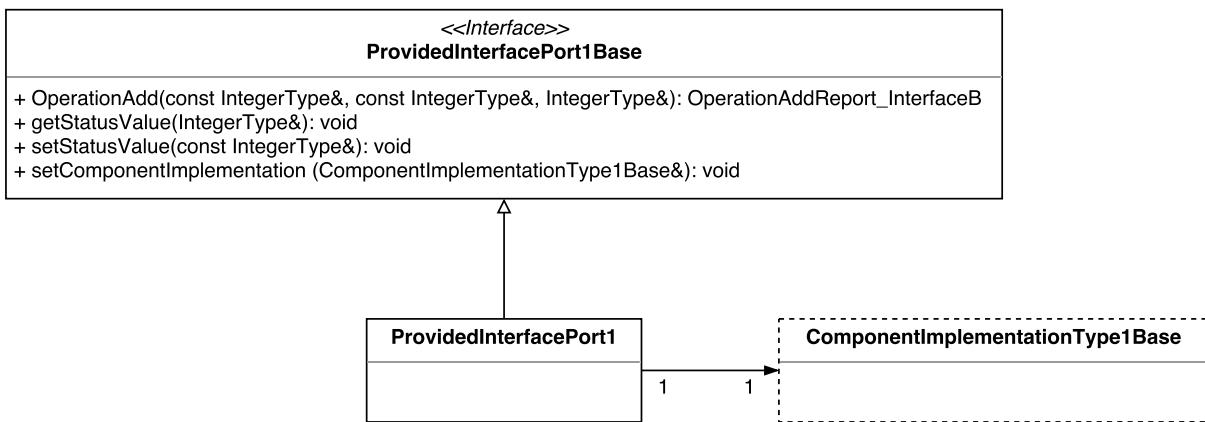

**Figure 6.19.:** UML class diagram representation of **ProvidedInterfacePort1** for **Component\_Callee** in the example OBSW model

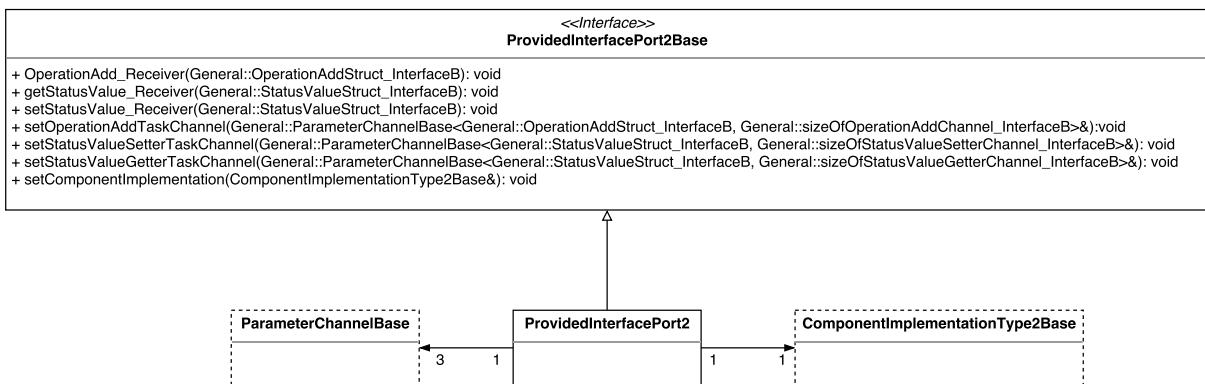


**Figure 6.20.:** UML class diagram representation of **ProvidedInterfacePort2** for **Component\_Callee** in the example OBSW model

The concrete implementation for the methods, in case the corresponding operation is requested to be released synchronously, consists of a simple call to the corresponding method in the referenced component implementation base class as shown in code excerpt

## 6. Infrastructural code generation

---

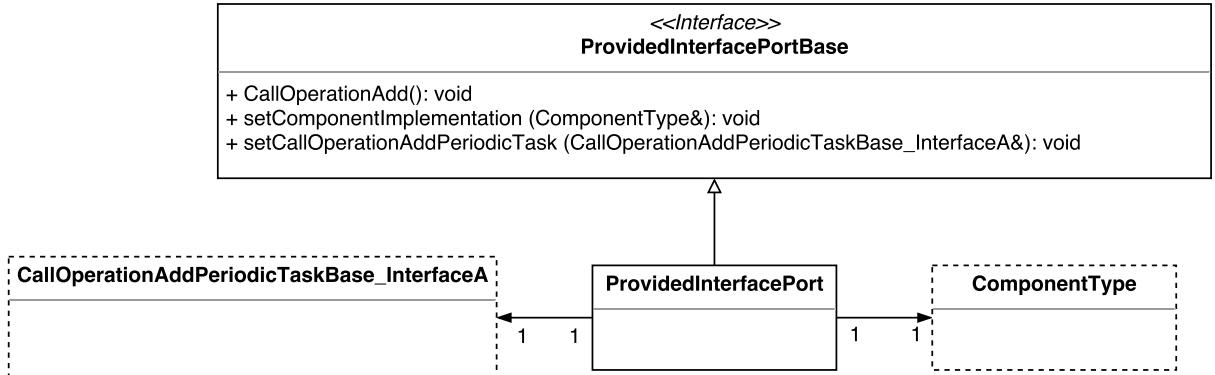

**Figure 6.21.:** UML class diagram representation of `ProvidedInterfacePort` for `Component_Caller` in the example OBSW model

**Listing 6.4** Code excerpt from the generated code for operation `OperationAdd` access in `ProvidedInterfacePort1` which is called synchronously and has `Protected` as a non-functional property attached to it

---

```

General::OperationAddReport ProvidedInterfacePort1::OperationAdd (const IntegerType&
    a,const IntegerType& b,IntegerType& c) {
    General::OperationAddReport_InterfaceB myReport;
    m_myComponent->lockOperationAdd_InterfaceB();
    myReport = m_myComponent->OperationAdd(a,b,c); //Simple method call
    m_myComponent->releaseOperationAdd_InterfaceB();
    return myReport;
}

```

---

in Listing 6.4. If the non-functional property attached with release of the operation on the provided interface side is `Protected`, then the implementation also includes acquiring and releasing of semaphore associated with the operation as shown in code excerpt in Listing 6.4.

The concrete implementation for the methods, in case the corresponding operation is requested to be released asynchronously, consist of pushing the data structure associated with the operation onto the corresponding task channel as shown in code excerpt in Listing 6.5 . A diagrammatic representation of the push that is required, is already shown in Step 2 of each of these figures Figure 5.2, Figure 5.3, Figure 5.4 in the section which deals with the required code archetypes in the programming model for asynchronous release patterns.

The concrete implementation for the methods, in case the corresponding operation is requested to be released asynchronously, with non-functional property as `cyclic` is a simple call to start the task using the reference to the task as shown in the code excerpt in Listing 6.6.

### 6.3. Mapping of design entities to the infrastructural code

---

**Listing 6.5** Code excerpt from the generated code for operation OperationAdd access in ProvidedInterfacePort2 which is called asynchronously

```
void ProvidedInterfacePort2::OperationAdd_Receiver  
    (General::OperationAddStruct_InterfaceB myStruct) {  
    m_myOperationAddChannel->push(myStruct); //A push onto the task channel  
}
```

---

**Listing 6.6** Code excerpt from the generated code for operation CallOperationAdd in ProvidedInterfacePort which has non-functional property set as Cyclic

```
void ProvidedInterfacePort::CallOperationAdd(void) {  
    m_myCallOperationAddTask->startPeriodicTask(); //Method call to start the task  
}
```

---

**For our example OBSW model:** The following classes as shown in Figure 6.19, Figure 6.20, Figure 6.21 are defined:

- ProvidedInterface1Base abstract base class and its corresponding Provided InterfacePort1 concrete implementation class
- ProvidedInterface2Base abstract base class and its corresponding Provided InterfacePort2 concrete implementation class
- ProvidedInterfacePort abstract base class and its corresponding Provided InterfacePort concrete implementation class

All the abstract base classes have pure virtual methods as per the general description given above and they have to be implemented in the corresponding concrete implementation classes. The concrete implementations are in line with the description as in the general case above.

#### Tasks from the Tasking framework

In the discussions about designing a programming model for OSRA in the Chapter 5, it was clear that the threads of control might contain tasks from the Tasking framework. Each task is mapped to an abstract base class and a concrete implementation class in C++. A task would have instances of the required task inputs, task event as per the required threads of control explained in detail in the chapter on arriving at a programming model for OSRA.

Each task stores a reference to the base class of the component implementation in order to access the services implemented in the respective component implementations.

## 6. Infrastructural code generation

---

**For our example OBSW model:** The following classes as shown in Figure 6.22, Figure 6.23, Figure 6.24, Figure 6.25 are defined:

- CallOperationAddPeriodicTaskBase\_InterfaceA abstract base class and CallOperationAddPeriodicTask concrete implementation class, in order to call operation CallOperationAdd in the ProvidedInterfacePort periodically every 2s
- OperationAddSporadicTaskBase\_InterfaceB abstract base class and a corresponding OperationAddSporadicTask concrete implementation class, in order to call operation OperationAdd in the ProvidedInterfacePort2 sporadically with an MIAT of 2s
- StatusValueSetterTaskBase\_InterfaceB abstract base class and a corresponding StatusValueSetterTask concrete implementation class, in order to provide asynchronous access to the setter operation of the interface attribute StatusValue in the ProvidedInterfacePort2
- StatusValueSetterTaskBase\_InterfaceB abstract base class and a corresponding StatusValueGetterTask concrete implementation class, in order to provide asynchronous access to the getter operation of the interface attribute StatusValue in the ProvidedInterfacePort2
- FailureEventReceiverTaskBase abstract base class and a corresponding FailureEventReceiverTask concrete implementation class, for the reception of Failure Event which are emitted by the Component\_Callee asynchronously and to forward it to Component\_Caller


### Component containers

A container of a component can be mapped to a class in C++ as in [PV12]. A component container consists of the following things:

- Instances of required interface ports
- Instance of component implementation
- Instances of tasks which are necessary to handle services which are called asynchronously
- Instances of tasks which are necessary to receive asynchronous events
- Instances of event emitter ports

A component container is also responsible for initializing the following:

### 6.3. Mapping of design entities to the infrastructural code

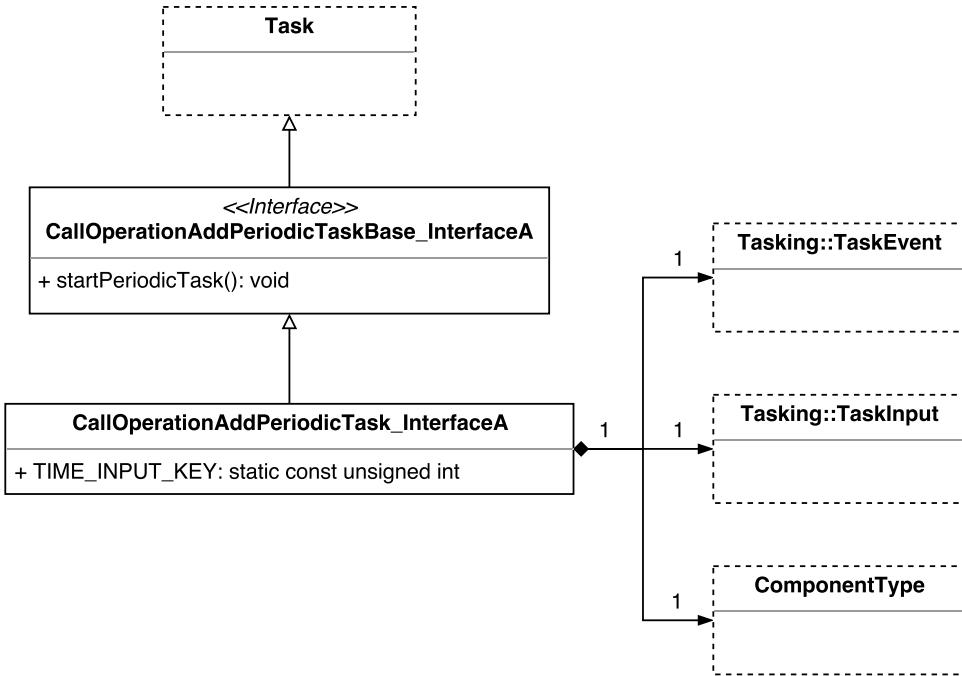


**Figure 6.22.:** UML class diagram representation of the task required to call `CallOperationAdd` in `ProvidedInterfacePort` periodically with a period of 2s in the example OBSW model

- The instantiated component instance by providing references of the event emitter ports
- The event emitter port by providing reference of the task channel to which the emitter port needs to push the information about the event
- The provided interface ports by:
  - Triggering the operations in the provided interface ports which have the desired non-function property set as `cyclic`
  - Providing reference of the component instance in order to access the service
  - Providing references of the different task channels they need to push the data structures associated with the operations onto, in order to handle the services which have the interaction kind specifies as `asynchronous`
- The instances of tasks with reference of component instance in order to schedule the execution of the services
- The required interface ports by providing references of:

## 6. Infrastructural code generation

---

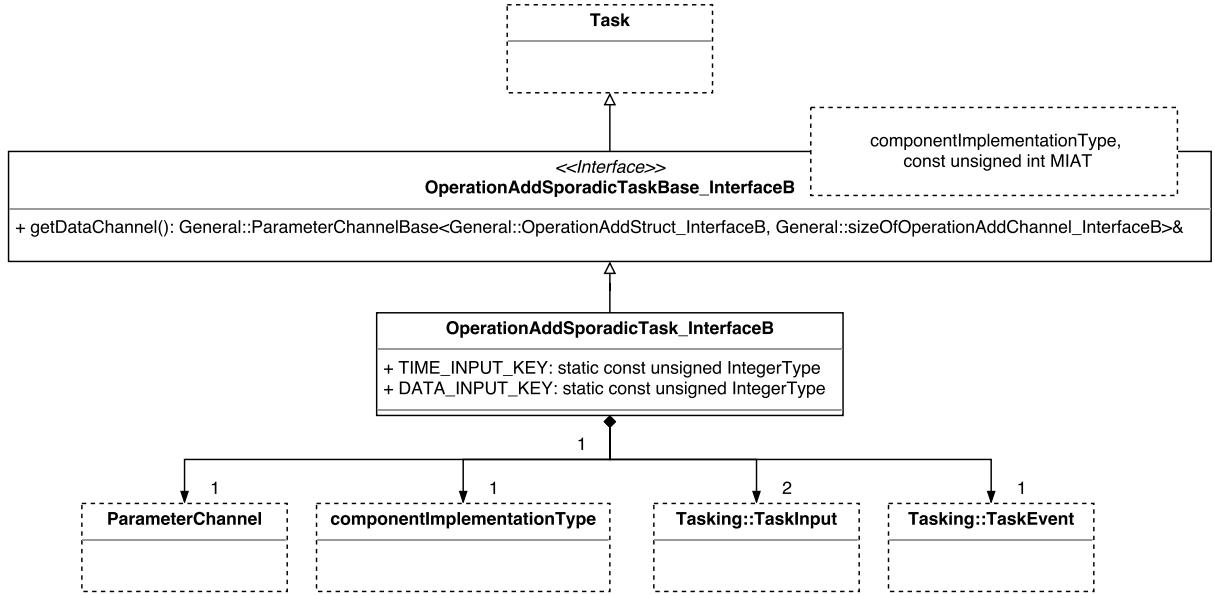

**Figure 6.23.:** UML class diagram representation of the task required to call OperationAdd in ProvidedInterfacePort2 sporadically with a MIAT of 2s in the example OBSW model


- The component instance, in order to initialize the data structures of the operations with correct function wrappers for call-back functions
- The respective provided interface port each one of them is bound to
- The event receiver tasks with references of the component instance and the channels which needs to be associated with their respective task inputs

**For our example OBSW model:** The following classes as shown in Figure 6.26 and Figure 6.27 are defined:

- Container in the namespace Component\_Caller which is the container for the component instance Component\_Caller\_impl\_inst and its provided and required interface slots
- Container in the namespace Component\_Callee which is the container for the component instance Component\_Callee\_impl\_inst and its provided interface slots

Both the containers have instances of different component as explained in the general case and as shown in Figure 6.26 and Figure 6.27. They are responsible for the initialization of different components as explained in the above general description.

## 6.4. Code generation using Xtend

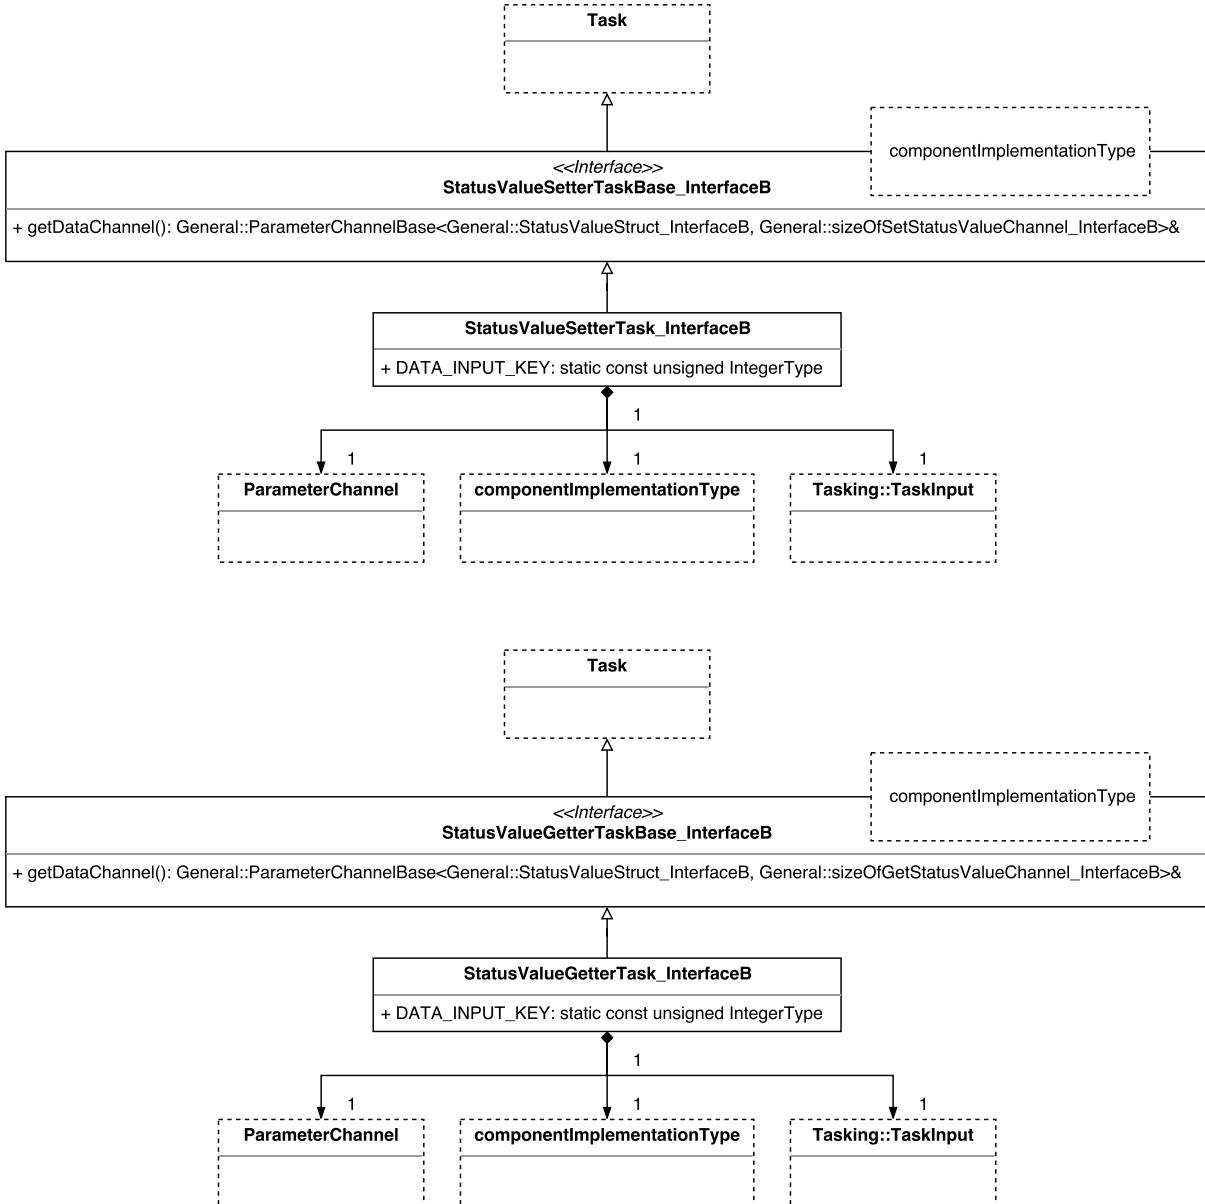


**Figure 6.24.:** UML class diagram representation of the tasks required to set and get the values of the interface attributes asynchronously in ProvidedInterface Port2 in the example OBSW model

## 6.4. Code generation using Xtend


The reference implementation of the OSRA component model consists in a set of .ecore metamodels [Pan17]. Ecore is an implementation of the EMOF (Essential MOF), the meta-meta language by the OMG for the specification of meta-models [Pan17]. The

## 6. Infrastructural code generation

---

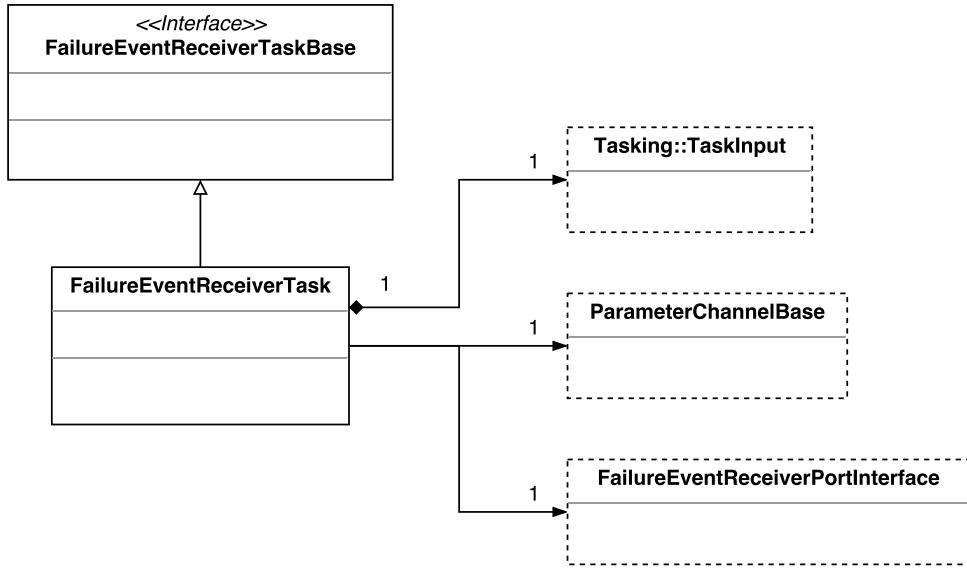


**Figure 6.25.:** UML class diagram representation of the task required for the reception of the FailureEvent in the example OBSW model

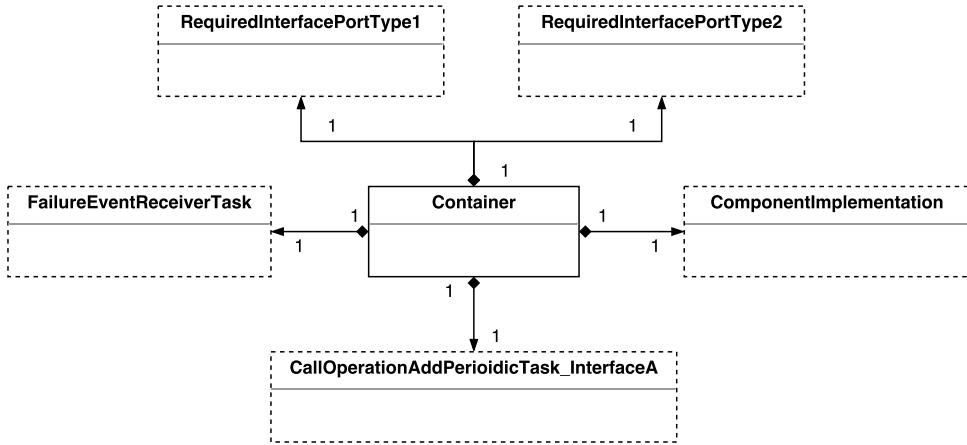

**Figure 6.26.:** UML class diagram representation of the container for Component\_Caller in the example OBSW model

main advantage of using Ecore is the ready availability of graphical editors for the specification of metamodels and powerful support provided by the Eclipse Modeling Framework (EMF), which is a framework of the Eclipse development platform that permits to generate a code implementation of the metamodel entities, basic editors for the creation of models conforming to the metamodel under development [Pan17].

It is an implementation decision in this Master thesis to use Xtend for the code generation. Xtend is a general purpose Java-like language that is completely operable with Java [Bet16; Xte]. Xtend has a more concise syntax than Java and provides powerful features

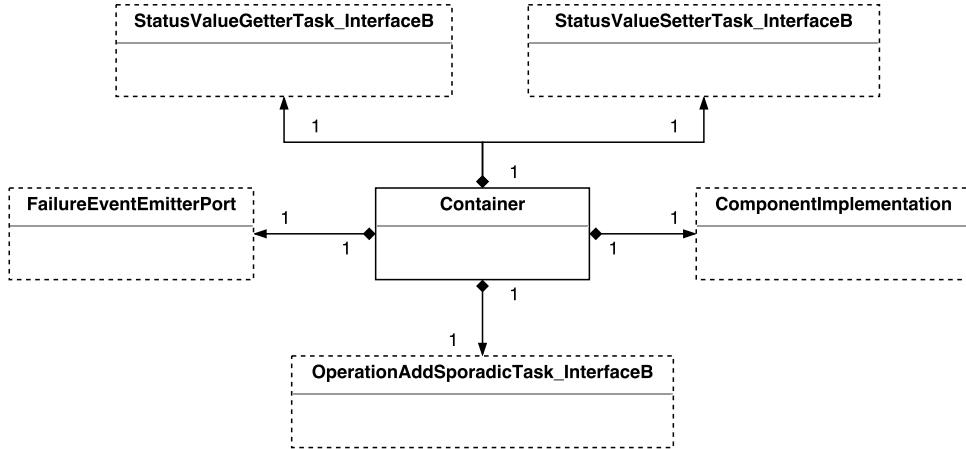

**Figure 6.27.:** UML class diagram representation of the container for `Component_Callee` in the example OBSW model

such as type inference, extension methods, dispatch methods, and lambda expressions and the all important multiline template expressions, which are useful when writing code generators [Bet16; Xte]. Xtend also provides powerful features that make model visiting and traversing really easy, straightforward, and natural to read and maintain.

Xtext is an eclipse framework for implementing programming languages and Domain Specific Languages (DSLs) [Bet16]. Xtext helps to implement languages quickly, and most of all, it covers all the aspects of a complete language infrastructure like parser, code generator etc. Xtext uses Google Guice, which is a dependency injection framework to create and call a code generator [Bet16]. The dependency injection pattern basically allows to inject implementation objects into a class hierarchy in a consistent way [Fow]. The Xtext's generator support can be used in Xtend directly to build code generators for non-Xtext based models, such as the OBSW models constructed using the OSRA component model [for].

The tutorial in [Tho] is used as a base in this Master thesis to construct a code generator for non-Xtext based models using Xtend and also provide a UI integration for the code generator.



## Chapter 7

# Evaluation of the code generator

---

## 7.1. Introduction

By using model-driven engineering tools (MDE) tools for code generation, it is possible to generate software code automatically and achieve extremely high developer productivity rates of thousands of function points and millions of lines of code per person-month [KLM15]. But, as we have seen in the previous chapters, the MDE approach consists of more than code generation tools; It defines the entire software-engineering approach that can impact the entire lifecycle from requirements gathering through sustainment [AS10; PV14].

It is important to consider these tools and methods in the context of a particular system acquisition i.e., the MDE methods and tools need to be aligned with the system acquisition strategies, which would in turn improve system quality, reduce time to field, and reduce sustainment cost [KLM15]. System acquisition strategies include:

- Securing the necessary data rights and licensing for tools, models, generated code, run-time libraries, frameworks, and other supporting software
- Reviewing and evaluating appropriate artifacts introduced by the MDE tools at the right time in the acquisition cycle
- Approaches to manage program risks, include risk identification and mitigation

If the methods and tools do not align with the system acquisition strategy, using them can result in increased risk and cost in development and sustainment. The acquirers in government or large commercial enterprises have the challenge of selecting contractors to develop their systems. The tools and processes selected by the contractors and developers have direct impact on the software quality concerns of the acquirer, who

## 7. Evaluation of the code generator

---

often has little influence on the selection of these tools and processes. The tool acquirer would then have to answer the following acquisition evaluation questions [KLM15]:

- Do the engineering processes and associated development tools match the desired acquisition strategy?
- Do the tools support the developer's software development methodology?
- Are the code generation tools capable of integrating with other development and management tools to support measurement and monitoring of the development progress?
- Will the selected development methodology with its associated tools be available and compatible for the expected lifecycle of the system?

This chapter subjects the code generator developed as a part of the Master thesis to evaluation methods listed in [KLM15] and provide necessary inputs for conducting the acquisition evaluation.

### 7.2. Selection and evaluation methods of a MDE tool for code generation

The step-by-step MDE tool selection process defined in [KLM15] makes use of the PECA method [CDL+04] as shown in ??.

As a part of the Establish criteria in the PECA process, the acquirer must establish criteria with which he has to decide whether a particular tool for automatic code generation is suitable for a specific system acquisition. Such a criteria can be developed using risk taxonomy [CKM+93] which ensures that all relevant acquisitions strategies are covered i.e., it provides a checklist to ensure all potential risks are considered [KLM15]. The risk taxonomy has three main sections [CKM+93]:

**Product engineering** This covers activities that create a system that satisfies the specified requirements and customer expectations. Risks in this area generally arise from requirements that arise from requirements that are technically difficult to achieve, inadequate requirements and design analysis, or poor design and implementation quality

**Development environment** This includes risks related to the development process and system, management methods, and work environment

**Program constraints** This cover risks that arise from factors external to the project

## 7.2. Selection and evaluation methods of a MDE tool for code generation

---

To establish a criteria for a particular program/project, it is necessary for the program to first scan the risk taxonomy and identify those areas that apply for the project. Each risk creates one or more acquisition concerns , which may refine the program risk or indicate how certain tool features or capabilities might help mitigate the risk [KLM15].

As part of the `Collect data` step in the PECA process, a vendor self-assessment questionnaire is prepared as in [KLM15] which is given to the MDE tool vendors, to provide data needed to make the tool selection decision.

## 7. Evaluation of the code generator

---

**Table 7.1.: My caption**

| Risk area                           | Potential Acquisition Concerns Related to MDE Tools for Automatic Code Generation   | Answers to the linked questions in the linked questionnaire   |
|-------------------------------------|---|---|
| <b>Requirements</b>                 |   |   |
| Stability                           | Responding to requirements changes may necessitate operating on partially complete models and performing refactoring or rework on models.                                       | The OBSW models designed using the OSRA Component Model should be subjected to model validation against the OSRA Specification Compliance and the SCM Metamodel Compliance before it is subjected to automatic code generation. In that case, the OBSW model, even if partially complete can be subjected to code generation if it clears the model validation step.  |
|                                     | Communication with stakeholders is partially important to resolve requirements issues, so tool features that support this become more important                                 | It is possible to annotate each of the model entities while constructing the OBSW model with information which can be used for communicating with the stakeholders. There is no additional documentation too which comes with the OSRA SCM tool suite   |
|                                     | Interfaces between the software modeling tools and the requirements management tools promote co-evolution of requirements and software  | There is no support for tracing requirements into model elements at the current state of development of OSRA SCM  |
| Completeness<br>Clarity<br>Validity | In addition to the concerns noted above about requirements stability, the ability to execute or simulate the execution of the model can help validate requirements completeness | At the current stage of the development of the OSRA SCM, it is not possible visualize the execution of the model. It is only possible to create static models of the OBSW and it is not possible to trace the flow of execution through the model, or inject data or events into the model  |
| Feasibility                         | The ability to perform analysis of the model for qualities such as latency, throughput and consistency can help demonstrate the feasibility of requirements                     | The model-based static analysis of the OBSW model is not possible at the current stage of development of the OSRA. Step 10 of the overall software development process in <a href="#">cref{section: Design steps}</a> in chapter <a href="#">cref{chap: Software development process}</a> gives an idea about the analysis of latency, throughput etc. which can be performed on the OBSW model in the future |
| Scale                               | Limitation on the size or complexity of the model that can be represented, analyzed, or transformed by the tool will limit the scale of the system that can be created          | There are no size and complexity limitations for representing OBSW models using the OSRA SCM tools  |

## 7.2. Selection and evaluation methods of a MDE tool for code generation

---

**Table 7.2.: My caption**

| Risk area     | Potential Acquisition Concerns Related to MDE Tools for Automatic Code Generation  | Answers to the linked questions in the linked questionnaire   |
|---------------|--|---|
| <b>Design</b> |  |   |
| Interfaces    | If only parts of the system will be automatically generated, while other parts will be developed using traditional approaches, the interfaces between these two types of software must be designed and developed | In the software design for the generated infrastructure code, the model entities are mapped to infrastructural code entities. As the model entities clearly separates the two types of code, the generated infrastructural code entities as well clearly separates the generated code from the user code, which may be developed using traditional approaches. The generated source code needs to be compiled. The generated source code is in C++ and works with the Tasking framework written in C++. The code is generated for the Linux platform and GNU GCC compiler can be used to compile to the source code |
| Testability   | The tool should generate code that exposes internal states and interfaces needed to test the generated software  | The generated infrastructural code is testable as testability of the generated code is one of the main concerns in the software design for the infrastructural code   |



## Chapter 8

# Conclusion

---

Hier bitte einen kurzen Durchgang durch die Arbeit.

## Future Work

...und anschließend einen Ausblick



## Appendix A

# LaTeX-Tipps

---

### A.1. File-Encoding und Unterstützung von Umlauten

Die Vorlage wurde 2010 auf UTF-8 umgestellt. Alle neueren Editoren sollten damit keine Schwierigkeiten haben.

### A.2. Zitate

Referenzen werden mittels `\cite[key]` gesetzt. Beispiel: `[WSPA ]` oder mit Autorennangabe: `WSPA`.

Der folgende Satz demonstriert 1. die Großschreibung von Autorennamen am Satzanfang, 2. die richtige Zitation unter Verwendung von Autorennamen und der Referenz, 3. dass die Autorennamen ein Hyperlink auf das Literaturverzeichnis sind sowie 4. dass in dem Literaturverzeichnis der Namenspräfix “van der” von “Wil M. P. van der Aalst” steht. **RVvDA2016** präsentieren eine Studie über die Effektivität von Workflow-Management-Systemen.

Der folgende Satz demonstriert, dass man mittels `label` in einem Bibliographie”=Eintrag den Textteil des generierten Labels überschreiben kann, aber das Jahr und die Eindeutigkeit noch von biber generiert wird. Die Apache ODE Engine `[ApacheODE ]` ist eine Workflow-Maschine, die BPEL-Prozesse zuverlässig ausführt.

Wörter am besten mittels `\enquote{...}` “einschließen”, dann werden die richtigen Anführungszeichen verwendet.

Beim Erstellen der Bibtex-Datei wird empfohlen darauf zu achten, dass die DOI aufgeführt wird.

## A. LaTeX-Tipps

---

**Listing A.1** lstlisting in einer Listings-Umgebung, damit das Listing durch Balken abgetrennt ist

---

```
<listing name="second sample">
<content>not interesting</content>
</listing>
```

---

## A.3. Mathematische Formeln

Mathematische Formeln kann man *so* setzen. `symbols-a4.pdf` (zu finden auf <http://www.ctan.org/tex-archive/info/symbols/comprehensive/symbols-a4.pdf>) enthält eine Liste der unter LaTeX direkt verfügbaren Symbole. Z. B.  $\mathbb{N}$  für die Menge der natürlichen Zahlen. Für eine vollständige Dokumentation für mathematischen Formelsatz sollte die Dokumentation zu `amsmath`, <ftp://ftp.ams.org/pub/tex/doc/amsmath/> gelesen werden.

Folgende Gleichung erhält keine Nummer, da `\equation*` verwendet wurde.

$$x = y$$

Die Gleichung A.1 erhält eine Nummer:

(A.1)  $x = y$

Eine ausführliche Anleitung zum Mathematikmodus von LaTeX findet sich in <http://www.ctan.org/tex-archive/help/Catalogue/entries/voss-mathmode.html>.

## A.4. Quellcode

Listing A.1 zeigt, wie man Programmlistings einbindet. Mittels `\lstinputlisting` kann man den Inhalt direkt aus Dateien lesen.

Quellcode im `<listing />` ist auch möglich.

## A.5. Abbildungen

Die Figure A.1 und A.2 sind für das Verständnis dieses Dokuments wichtig. Im Anhang zeigt Figure A.4 on page 103 erneut die komplette Choreographie.

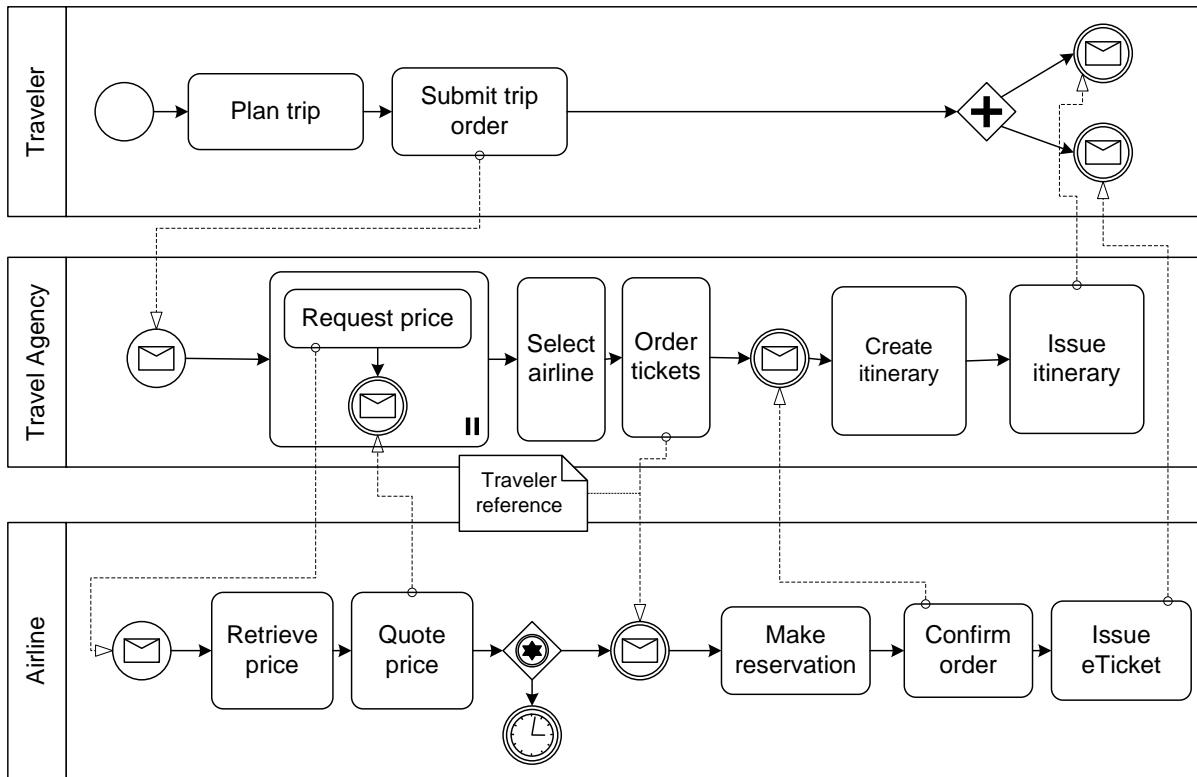


Figure A.1.: Beispiel-Choreographie

Das SVG in ?? ist direkt eingebunden, während der Text im SVG in ?? mittels pdflatex gesetzt ist.

Falls man die Graphiken sehen möchte, muss inkscape im PATH sein und im Tex-Quelltext \iffalse und \iftrue auskommentiert sein.

## A.6. Tabellen


Table A.1 zeigt Ergebnisse und die Table A.1 zeigt wie numerische Daten in einer Tabelle representiert werden können.

## A.7. Pseudocode


Algorithm A.1 zeigt einen Beispielalgorithmus.

## A. LaTeX-Tipps

---

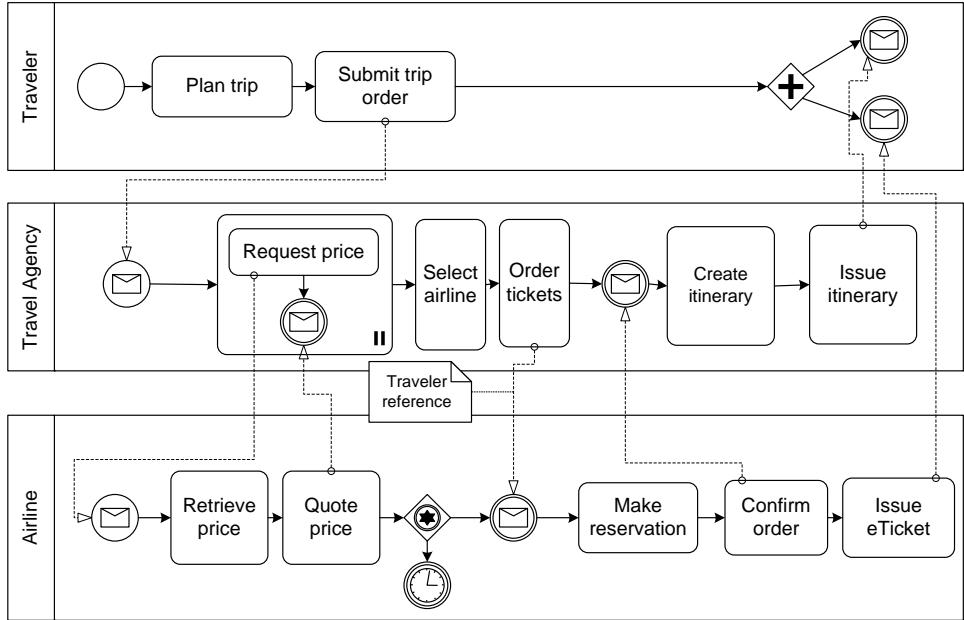

**Figure A.2.:** Die Beispiel-Choreographie. Nun etwas kleiner, damit \textwidth demonstriert wird. Und auch die Verwendung von alternativen Bildunterschriften für das Verzeichnis der Abbildungen. Letzteres ist allerdings nur Bedingt zu empfehlen, denn wer liest schon so viel Text unter einem Bild? Oder ist es einfach nur Stilsache?

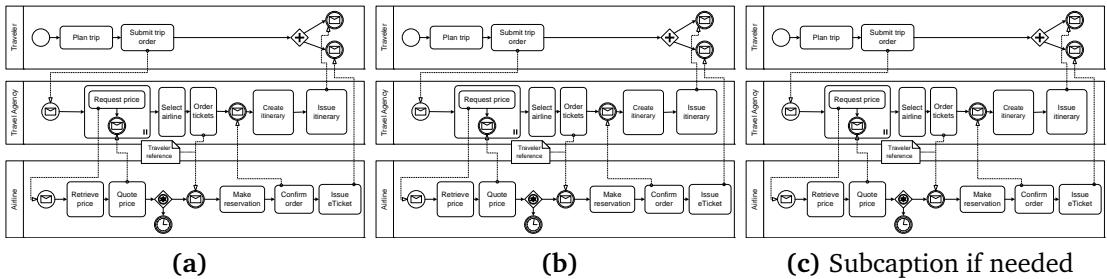

**Figure A.3.:** Beispiel um 3 Abbildung nebeneinander zu stellen nur jedes einzeln referenzieren zu können. Abbildung A.3b ist die mittlere Abbildung.

| <b>zusammengefasst</b>             | <b>Titel</b>  |                                       |
|------------------------------------|---|---------------------------------------|
| Tabelle<br>tabsatz.pdf<br>Beispiel | wie<br>empfohlen<br>für die Verwendung von “multirow” | in<br>gesetzt<br>ein schönes Beispiel |

**Table A.1.:** Beispieltabelle – siehe <http://www.ctan.org/tex-archive/info/german/tabsatz/>

| <b>Bedingungen</b> | <b>Parameter 1</b> |           | <b>Parameter 2</b> |           | <b>Parameter 3</b> |           | <b>Parameter 4</b> |           |
|--------------------|--------------------|-----------|--------------------|-----------|--------------------|-----------|--------------------|-----------|
|                    | <b>M</b>           | <b>SD</b> | <b>M</b>           | <b>SD</b> | <b>M</b>           | <b>SD</b> | <b>M</b>           | <b>SD</b> |
| W                  | 1.1                | 5.55      | 6.66               | .01       |                    |           |                    |           |
| X                  | 22.22              | 0.0       | 77.5               | .1        |                    |           |                    |           |
| Y                  | 333.3              | .1        | 11.11              | .05       |                    |           |                    |           |
| Z                  | 4444.44            | 77.77     | 14.06              | .3        |                    |           |                    |           |

**Table A.2.:** Beispieltabelle für 4 Bedingungen (W-Z) mit jeweils 4 Parameters mit (M und SD). Hinweis: immer die selbe anzahl an Nachkommastellen angeben.

## A. LaTeX-Tipps

---

### Algorithmus A.1 Sample algorithm

---

```

procedure SAMPLE( $a, v_e$ )
    parentHandled  $\leftarrow (a = \text{process}) \vee \text{visited}(a'), (a', c, a) \in \text{HR}$ 
                    //  $(a', c'a) \in \text{HR}$  denotes that  $a'$  is the parent of  $a$ 
    if parentHandled  $\wedge (\mathcal{L}_{in}(a) = \emptyset \vee \forall l \in \mathcal{L}_{in}(a) : \text{visited}(l)) then
        visited( $a$ )  $\leftarrow \text{true}$ 
        writes $_{\circ}$ ( $a, v_e$ )  $\leftarrow \begin{cases} \text{joinLinks}(a, v_e) & |\mathcal{L}_{in}(a)| > 0 \\ \text{writes}_{\circ}(p, v_e) & \exists p : (p, c, a) \in \text{HR} \\ (\emptyset, \emptyset, \emptyset, \text{false}) & \text{otherwise} \end{cases}$ 
        if  $a \in \mathcal{A}_{basic}$  then
            HANDLEBASICACTIVITY( $a, v_e$ )
        else if  $a \in \mathcal{A}_{flow}$  then
            HANDLEFLOW( $a, v_e$ )
        else if  $a = \text{process}$  then // Directly handle the contained activity
            HANDLEACTIVITY( $a', v_e$ ),  $(a, \perp, a') \in \text{HR}$ 
            writes $_{\bullet}$ ( $a$ )  $\leftarrow \text{writes}_{\bullet}(a')$ 
        end if
        for all  $l \in \mathcal{L}_{out}(a)$  do
            HANDLELINK( $l, v_e$ )
        end for
    end if
end procedure$ 
```

---

Und wer einen Algorithmus schreiben möchte, der über mehrere Seiten geht, der kann das nur mit folgendem **üblen** Hack tun:

---

**Algorithmus A.2 Description**

---

code goes here  
test2

---

## A.8. Abkürzungen

Beim ersten Durchlauf betrug die Fehlerrate (FR) 5. Beim zweiten Durchlauf war die FR 3.

Mit `\ac{...}` können Abkürzungen eingebaut werden, beim ersten aufrufen wird die lange Form eingesetzt. Beim wiederholten Verwenden von `\ac{...}` wird automatisch die kurz Form angezeigt. Außerdem wird die Abkürzung automatisch in die Abkürzungsliste eingefügt.

Definiert werden Abkürzungen in der Datei *ausarbeitung.tex* im Abschnitt `'%%% acro'` mithilfe von `\DeclareAcronym{...}{...}`.

Mehr infos unter: [http://mirror.hmc.edu/ctan/macros/latex/contrib/acro/acro\\_en.pdf](http://mirror.hmc.edu/ctan/macros/latex/contrib/acro/acro_en.pdf)

## A.9. Verweise

Für weit entfernte Abschnitte ist “varioreref” zu empfehlen: “Siehe Appendix A.3 on page 96”. Das Kommando `\vref` funktioniert ähnlich wie `\cref` mit dem Unterschied, dass zusätzlich ein Verweis auf die Seite hinzugefügt wird. `vref:` “Appendix A.1 on page 95”, `cref:` “Appendix A.1”, `ref:` “A.1”.

Falls “varioreref” Schwierigkeiten macht, dann kann man stattdessen “cref” verwenden. Dies erzeugt auch das Wort “Abschnitt” automatisch: Appendix A.3. Das geht auch für Abbildungen usw. Im Englischen bitte `\Cref{...}` (mit großen “C” am Anfang) verwenden.

## A. LaTeX-Tipps

---

### A.10. Definitionen

#### **Definition A.10.1 (Title)**

*Definition Text*

Definition A.10.1 zeigt ...

### A.11. Verschiedenes

KAPITÄLCHEN werden schön gesperrt...

- I. Man kann auch die Nummerierung dank paralist kompakt halten
- II. und auf eine andere Nummerierung umstellen

### A.12. Weitere Illustrationen

Abbildungen A.4 und A.5 zeigen zwei Choreographien, die den Sachverhalt weiter erläutern sollen. Die zweite Abbildung ist um 90 Grad gedreht, um das Paket `rotating` zu demonstrieren.

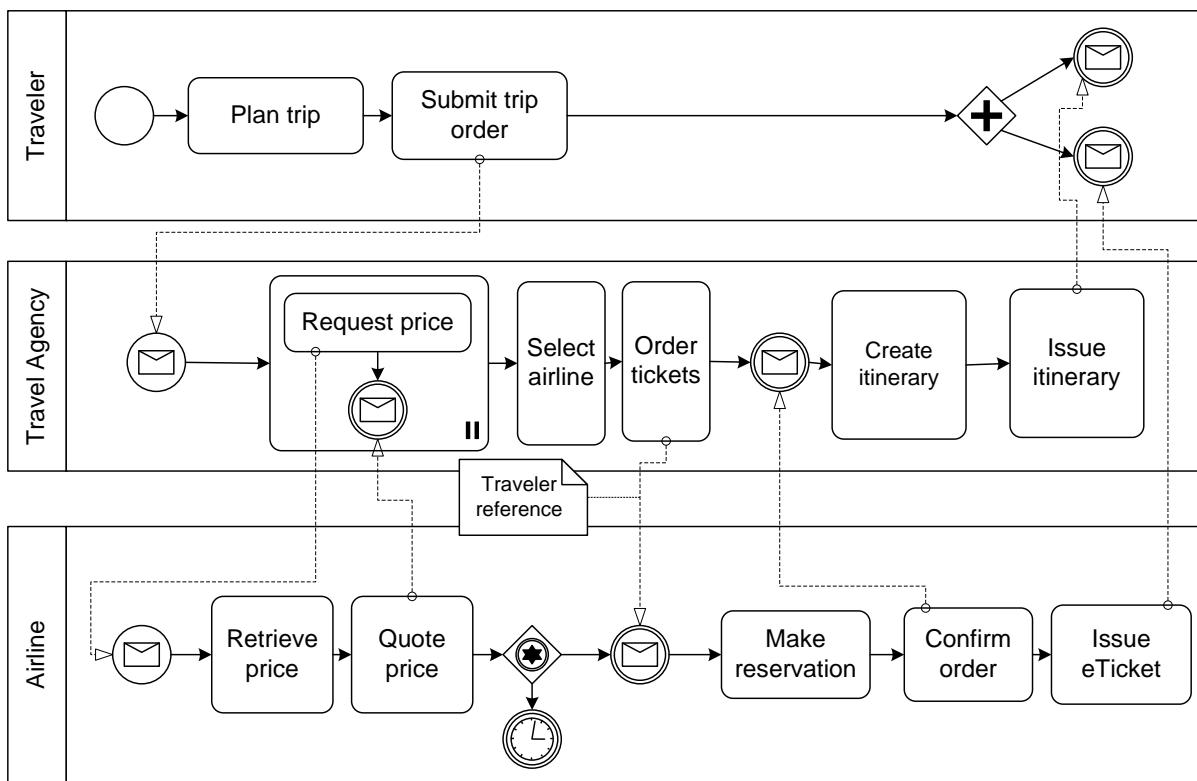


Figure A.4.: Beispiel-Choreographie I

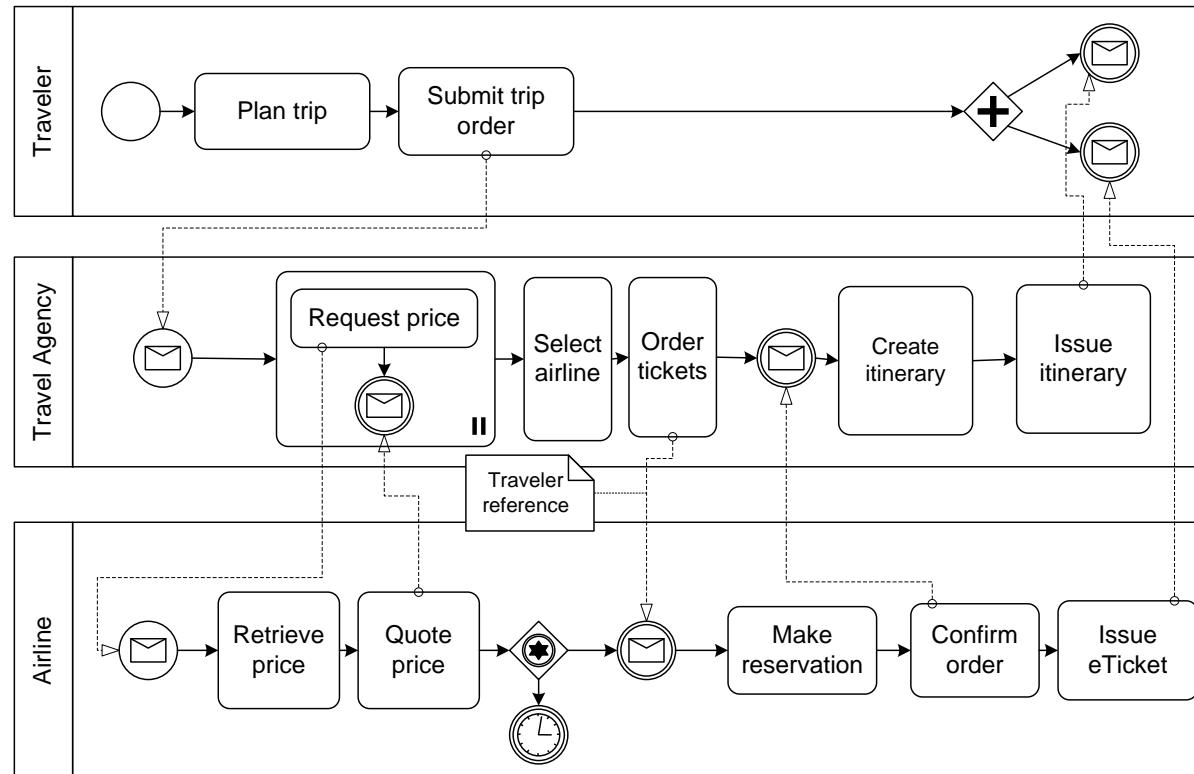


Figure A.5.: Beispiel-Choreographie II

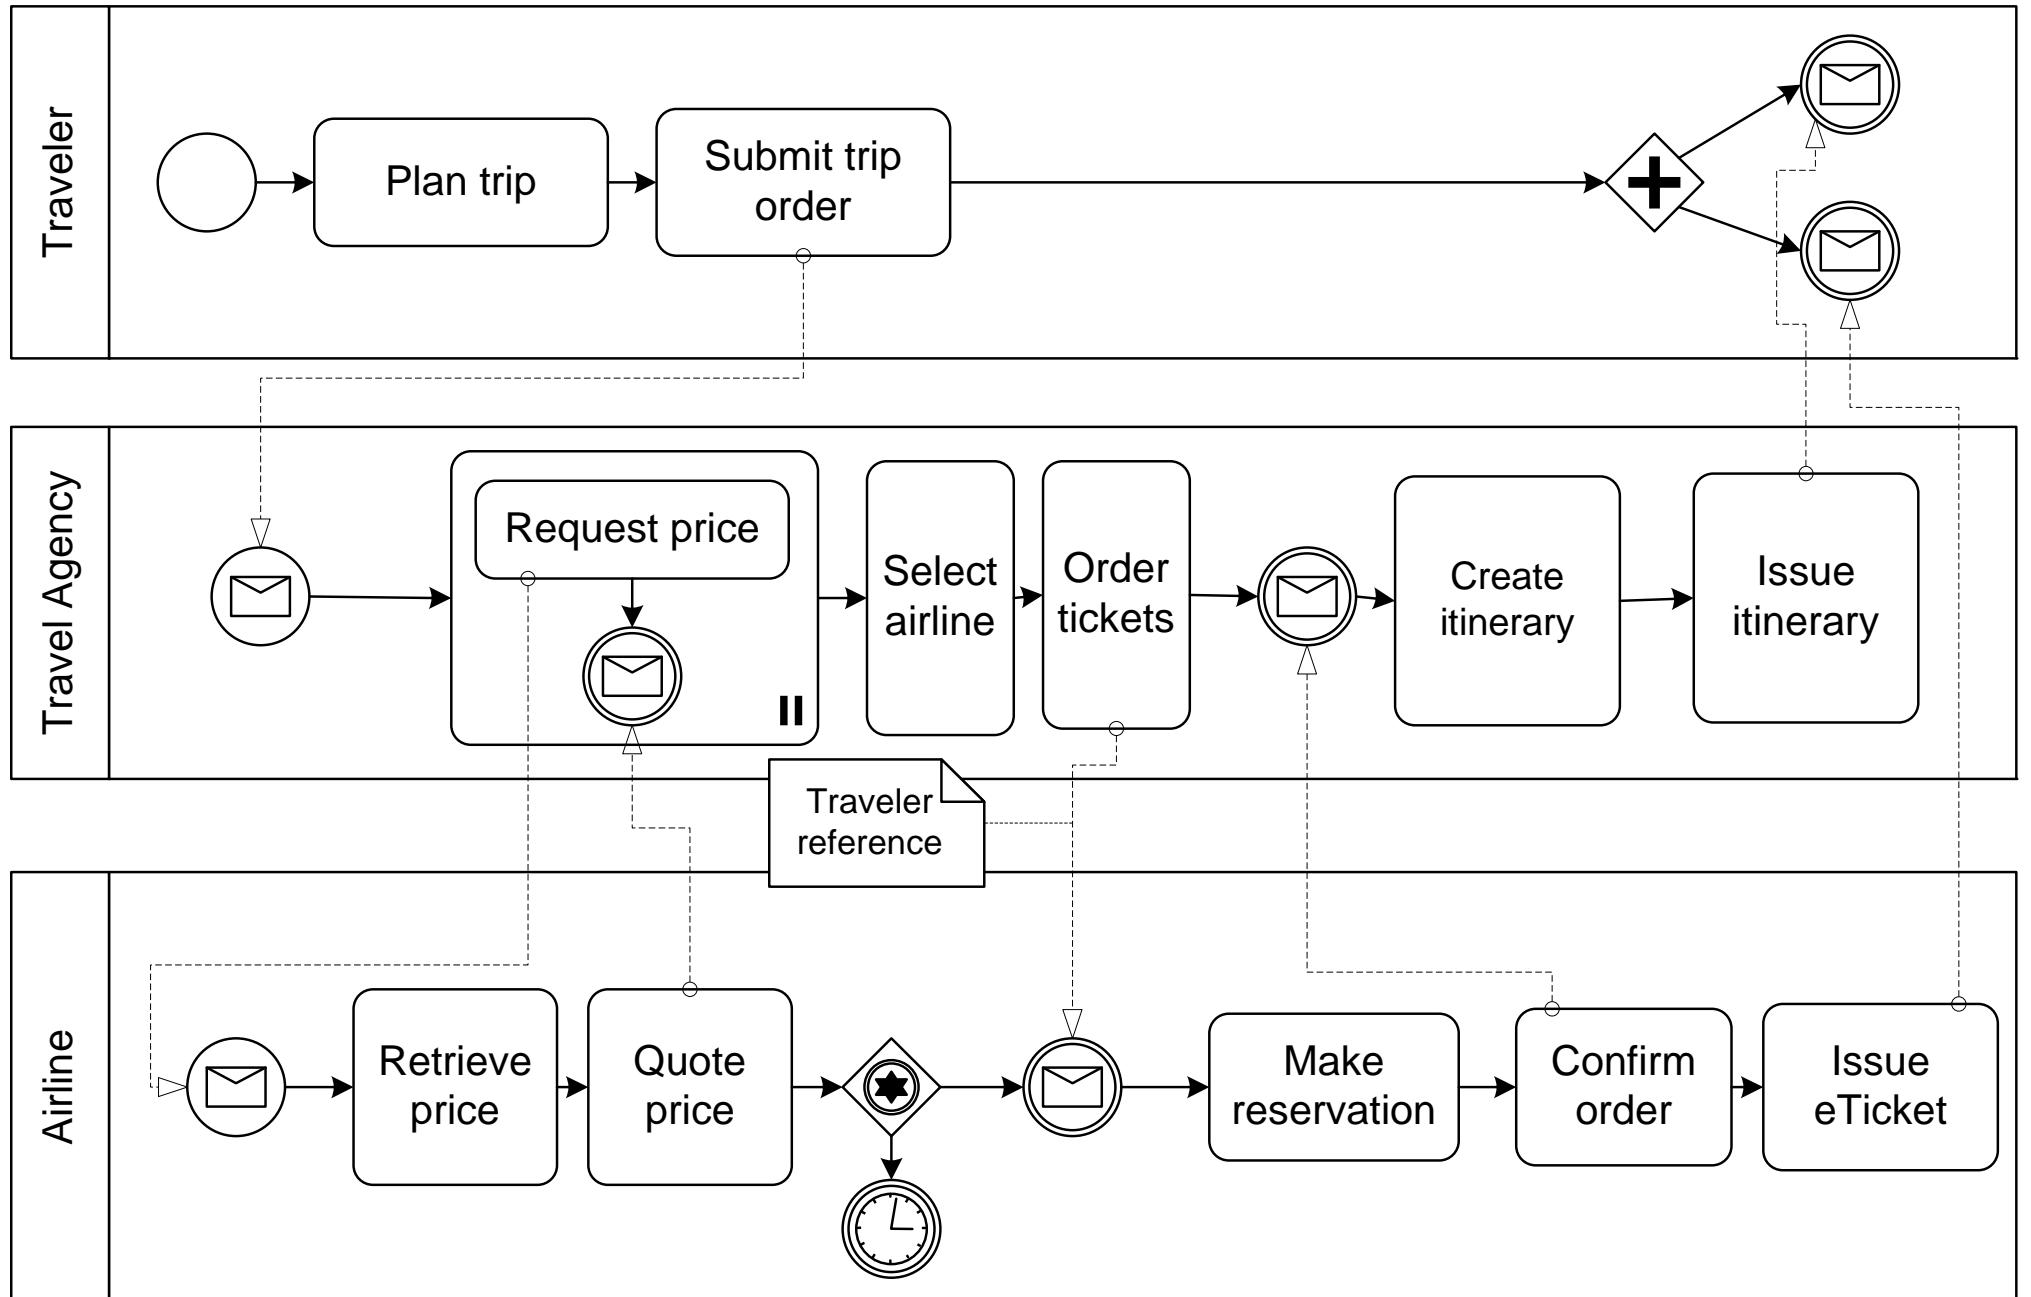


Figure A.6.: Beispiel-Choreographie, auf einer weißen Seite gezeigt wird und über die definierten Seitenränder herausragt

## A.13. Schlusswort

Verbesserungsvorschläge für diese Vorlage sind immer willkommen. Bitte bei github ein Ticket eintragen (<https://github.com/latextemplates/uni-stuttgart-computer-science-template/issues>).

# Bibliography

---

- [07] *Systems and Software engineering - Recomended practice for architectural description of software-intensive systems.* Standard. Geneva, CH: ISO/IEC 42010 (IEEE Std) 1471-2000, Mar. 2007 (cit. on p. 4).
- [AS10] M. P. Andreas Jung, J.-L. T. supported by the Savoir-Faire working group. *SAVOIR-FAIRE - On-board Software Reference Architecture.* Tech. rep. ESTEC-European Space Technology and Research Centre, 2010 (cit. on pp. 1, 3–8, 12, 14, 18, 22, 29, 87).
- [BDV04] A. Burns, B. Dobbing, T. Vardanega. “Guide for the Use of the Ada Ravenscar Profile in High Integrity Systems.” In: *Ada Lett.* XXIV.2 (June 2004), pp. 1–74. ISSN: 1094-3641. DOI: [10.1145/997119.997120](https://doi.acm.org/10.1145/997119.997120). URL: [http://doi.acm.org/10.1145/997119.997120](https://doi.acm.org/10.1145/997119.997120) (cit. on p. 42).
- [Bet16] L. Bettini. *Implementing Domain-Specific Languages with Xtext and Xtend.* Packt Publishing, 2016. ISBN: 978-1-78646-496-5 (cit. on pp. 84, 85).
- [BPV08] M. Bordin, M. Panunzio, T. Vardanega. “Fitting Schedulability Analysis Theory into Model-Driven Engineering.” In: *2008 Euromicro Conference on Real-Time Systems.* July 2008, pp. 135–144. DOI: [10.1109/ECRTS.2008.12](https://doi.org/10.1109/ECRTS.2008.12) (cit. on pp. 11, 13, 18, 21, 42).
- [CDL+04] S. Cammella-Dorda, J. Dean, G. Lewis, E. Morris, P. Oberndorf, E. Harper. *A Process for COTS Software Product Evaluation.* Tech. rep. Software Engineering Institute, Carnegie Mellon University, 2004 (cit. on p. 88).
- [CKM+93] M. Carr, S. Konda, I. Monarch, C. F. Walker, C. Ulrich. *Taxonomy-Based Risk Identification.* Tech. rep. Software Engineering Institute, Carnegie Mellon University, 1993 (cit. on p. 88).

## Bibliography

---

- [CLWK00] X. Cai, M. R. Lyu, K.-F. Wong, R. Ko. “Component-based software engineering: technologies, development frameworks, and quality assurance schemes.” In: *Proceedings Seventh Asia-Pacific Software Engineering Conference. APSEC 2000.* 2000, pp. 372–379. DOI: [10.1109/APSEC.2000.896722](https://doi.org/10.1109/APSEC.2000.896722) (cit. on p. 12).
- [EO16] ESA, Obeo. *User Manual of the OSRA SCM Model Editor.* Tech. rep. European Space Agency, 2016 (cit. on pp. 32, 33, 60, 61).
- [for] C. force. *Code generation using Eclipse Xtend.* URL: <http://cohesionforce.github.io/reveal/#/> (cit. on p. 85).
- [Fow] M. Fowler. *Inversion of Control Containers and the Dependency Injection pattern.* URL: <https://martinfowler.com/articles/injection.html> (cit. on pp. 16, 36, 85).
- [Gén] G. Génova. *Modeling and Meta-modeling in Model Driven Development.* URL: <http://www.ie.inf.uc3m.es/ggenova/Warsaw/Part3.pdf> (cit. on p. 10).
- [Gmb] V. I. GmbH. *AUTOSAR Initiative.* URL: [https://elearning.vector.com/index.php?&wbt\\_ls\\_seite\\_id=1044961&root=378422&seite=vl\\_autosar\\_introduction\\_en](https://elearning.vector.com/index.php?&wbt_ls_seite_id=1044961&root=378422&seite=vl_autosar_introduction_en) (cit. on p. 6).
- [GSL+17] J. Grosse, S. Seidel, M. D. Lachmann, D. Becker, A. Wenzlawski, V. Schkolnik, A. N. Dinkelaker, O. Hellwig, H. Müntinga, M. Elsen, H. Ahlers, B. Weps, T. Wendrich, A. Stamminger, M. Krutzik, A. Peters, P. Windpassinger, E. Rasel, C. Braxmaier. “The MAIUS Sounding Rocket Missions – Recent Results, Lessons Learned and Future Activities.” In: *68th International Astronautical Congress (IAC).* Sept. 2017. URL: <http://elib.dlr.de/115035/> (cit. on p. 38).
- [HG10] W. D. H. Bo D. Hui, Z. Guifan. “Basic Concepts on AUTOSAR Development.” In: *2010 International Conference on Intelligent Computation Technology and Automation.* (Changsha, China, May 11, 2010). IEEE, 2010, pp. 871–873. ISBN: 978-1-4244-7280-2. DOI: [10.1109/ICICTA.2010.571](https://doi.org/10.1109/ICICTA.2010.571) (cit. on p. 3).
- [KLM15] J. Klevin, H. Levinson, J. Marchetti. *Model-Driven Engineering: Automatic Code Generation and Beyond.* Tech. rep. Software Engineering Institute, Carnegie Mellon University, 2015 (cit. on pp. 87–89).
- [Kru00] P. Kruchten. *The Rational Unified Process: An Introduction – 2nd Edition.* Addison-Wesley Professional, 2000. ISBN: 0201707101 (cit. on p. 5).

- [MH15] O. Maibaum, A. Heidecker. “Software Evolution from TET-1 to Eu:CROPIS.” In: *10th International Symposium on Small Satellites for Earth Observation*. Ed. by R. Sandau, H.-P. Röser, A. Valenzuela. Wissenschaft & Technik Verlag, Apr. 2015, pp. 195–198. URL: <http://elib.dlr.de/100859/> (cit. on pp. 35, 36, 38).
- [MLG13] O. Maibaum, D. Lüdtke, A. Gerndt. “Tasking Framework: Parallelization of Computations in Onboard Control Systems.” In: *ITG/GI Fachgruppentreffen Betriebssysteme*. <http://www.betriebssysteme.org/Aktivitaeten/Treffen/2013-Berlin/Programm/>. Nov. 2013. URL: <http://elib.dlr.de/87505/> (cit. on pp. 35–39).
- [MR18] S. Montenegro, J. Richardson. “RODOS operating system for Network Centric Core Avionics.” In: (Feb. 2018) (cit. on p. 38).
- [MTRG11] O. Maibaum, T. Terzibaschian, C. Raschke, A. Gerndt. “Software Reuse of the BIRD ACS for the TET Satellite Bus.” In: *8th IAA Symposium on Small Satellites for Earth Observation*. Ed. by R. Sandau, H.-P. Röser, A. Valenzuela. Wissenschaft und Technik Verlag Berlin, Apr. 2011, pp. 409–412. URL: <http://elib.dlr.de/68293/> (cit. on pp. 35, 36).
- [Pan11] M. Panunzio. “Definition, realization and evaluation of a software reference architecture for use in space applications.” PhD thesis. Universitàdi Bologna Università degli Studi di Padova, 2011 (cit. on pp. 5–8, 11–13, 15, 16, 19, 22, 29, 35, 42).
- [Pan17] M. Panunzio. *Specification of the Metamodel for the OSRA Component Model*. Tech. rep. Thales Alenia Space - France, 2017 (cit. on pp. 17, 30, 46, 48, 50, 51, 53–57, 59, 64, 70, 74, 75, 83, 84).
- [PHW+16] T. Peng, K. Höflinger, B. Weps, O. Maibaum, K. Schwenk, D. Lüdtke, A. Gerndt. “A Component-Based Middleware for a Reliable Distributed and Reconfigurable Spacecraft Onboard Computer.” In: *2016 IEEE 35th Symposium on Reliable Distributed Systems (SRDS)*. Sept. 2016, pp. 337–342 (cit. on p. 38).
- [PV] M. Panunzio, T. Vardanega. “A Component Model for On-board Software Applications.” In: *36th EUROMICRO Conference on Software Engineering and Advanced Applications*. (Sept. 1, 2010). Lille, France: IEEE, pp. 57–64. ISBN: 978-1-4244-7901-6. DOI: [10.1109/SEAA.2010.39](https://doi.org/10.1109/SEAA.2010.39) (cit. on pp. 10, 14).
- [PV09] M. Panunzio, T. Vardanega. “On Component-Based Development and High-Integrity Real-Time Systems.” In: *2009 15th IEEE International Conference on Embedded and Real-Time Computing Systems and Applications*. Aug.

## Bibliography

---

- 2009, pp. 79–84. DOI: [10.1109/RTCSA.2009.15](https://doi.org/10.1109/RTCSA.2009.15) (cit. on pp. 9, 10, 12, 16, 28).
- [PV12] M. Panunzio, T. Vardanega. “Ada Ravenscar Code Archetypes for Component-Based Development.” In: *Reliable Software Technologies – Ada-Europe 2012*. Ed. by M. Brorsson, L. M. Pinho. Berlin, Heidelberg: Springer Berlin Heidelberg, 2012, pp. 1–17. ISBN: 978-3-642-30598-6 (cit. on pp. 41, 42, 45, 49, 53, 63, 69, 73, 74, 80).
- [PV13a] M. Panunzio, T. Vardanega. “Charting the Evolution of the Ada Ravenscar Code Archetypes.” In: *Ada Lett.* 33.1 (June 2013), pp. 64–83. ISSN: 1094-3641. DOI: [10.1145/2492312.2492320](https://doi.org/10.1145/2492312.2492320). URL: <http://doi.acm.org/10.1145/2492312.2492320> (cit. on pp. 11, 13, 42, 45, 49).
- [PV13b] M. Panunzio, T. Vardanega. “On Software Reference Architectures and Their Application to the Space Domain.” In: *Safe and Secure Software Reuse*. Ed. by J. Favaro, M. Morisio. Berlin, Heidelberg: Springer Berlin Heidelberg, 2013, pp. 144–159. ISBN: 978-3-642-38977-1 (cit. on p. 5).
- [PV14] M. Panunzio, T. Vardanega. “A component-based process with separation of concerns for the development of embedded real-time software systems.” In: *Journal of Systems and Software* 96 (2014), pp. 105–121. ISSN: 0164-1212. DOI: <https://doi.org/10.1016/j.jss.2014.05.076>. URL: <http://www.sciencedirect.com/science/article/pii/S0164121214001381> (cit. on pp. 10, 12–14, 16, 21–27, 29, 31, 41, 42, 46, 48, 50, 55, 59, 69, 70, 74, 75, 87).
- [RFA+12] A.-I. Rodriguez, F. Ferrero, E. Alana, A. Jung, M. Panunzio, T. Vardanega, A. Grenham. “The Component Layer of Cordet On-Board Software Architecture.” In: *DASIA 2012 Data Systems In Aerospace*. (in Dubrovnik, Croatia, May 14, 2012). Ed. by L. O. E. SP-701. 2012. ISBN: 978-92-9092-265-0 (cit. on pp. 4, 7, 10).
- [SF11] J. A. S. Dersten, J. Froberg. “Effect Analysis of the Introduction of AUTOSAR - A Systematic Literature Review.” In: *2011 37th EUROMICRO Conference on Software Engineering and Advanced Applications*. (Oulu, Finland, Aug. 30, 2011). IEEE, 2011, pp. 239–246. ISBN: 978-1-4577-1027-8. DOI: [10.1109/SEAA.2011.44](https://doi.org/10.1109/SEAA.2011.44) (cit. on p. 3).
- [TAA+17] S. Theil, N. A. Ammann, F. Andert, T. Franz, H. Krüger, H. Lehner, M. Lingenauber, D. Lüdtke, B. Maass, C. Paproth, J. Wohlfeil. “ATON - Autonomous Terrain-based Optical Navigation for Exploration Missions: Recent Flight Test Results.” In: *Deutscher Luft- und Raumfahrtkongress*. Sept. 2017. URL: <http://elib.dlr.de/114457/> (cit. on pp. 35, 38).

- [Tho] K. Thoms. *Recipes to build Code Generators for Non-Xtext Models with Xtend*. URL: <https://www.eclipsecon.org/europe2016/session/recipes-build-code-generators-non-xtext-models-xtend> (cit. on p. 85).
- [Xte] Xtend. *Xtend - Documentation*. URL: <http://www.eclipse.org/xtend/documentation/> (cit. on pp. 84, 85).

All links were last followed on March 17, 2008.



## **Declaration**

I hereby declare that the work presented in this thesis is entirely my own and that I did not use any other sources and references than the listed ones. I have marked all direct or indirect statements from other sources contained therein as quotations. Neither this work nor significant parts of it were part of another examination procedure. I have not published this work in whole or in part before. The electronic copy is consistent with all submitted copies.

---

place, date, signature