Exp:9 - Design simple Topology & Configure One Router, Two Switches and PCs Using Cisco Tracker.

AIM:

To design and configure simple network topology consisting of one router, two switches, and four PCs using cisco Packet tracer and verify communication between all devices

Procedure:

Step 1: Open Cisco Packet tracer.

Step 2: Add devices.

Step 3: Connect Devices.

Step 4: Open Router CLI

Step 5: Configure Interface G0/0.

Step 6: Configure Interface G0/1

Step 7: Save Router configuration

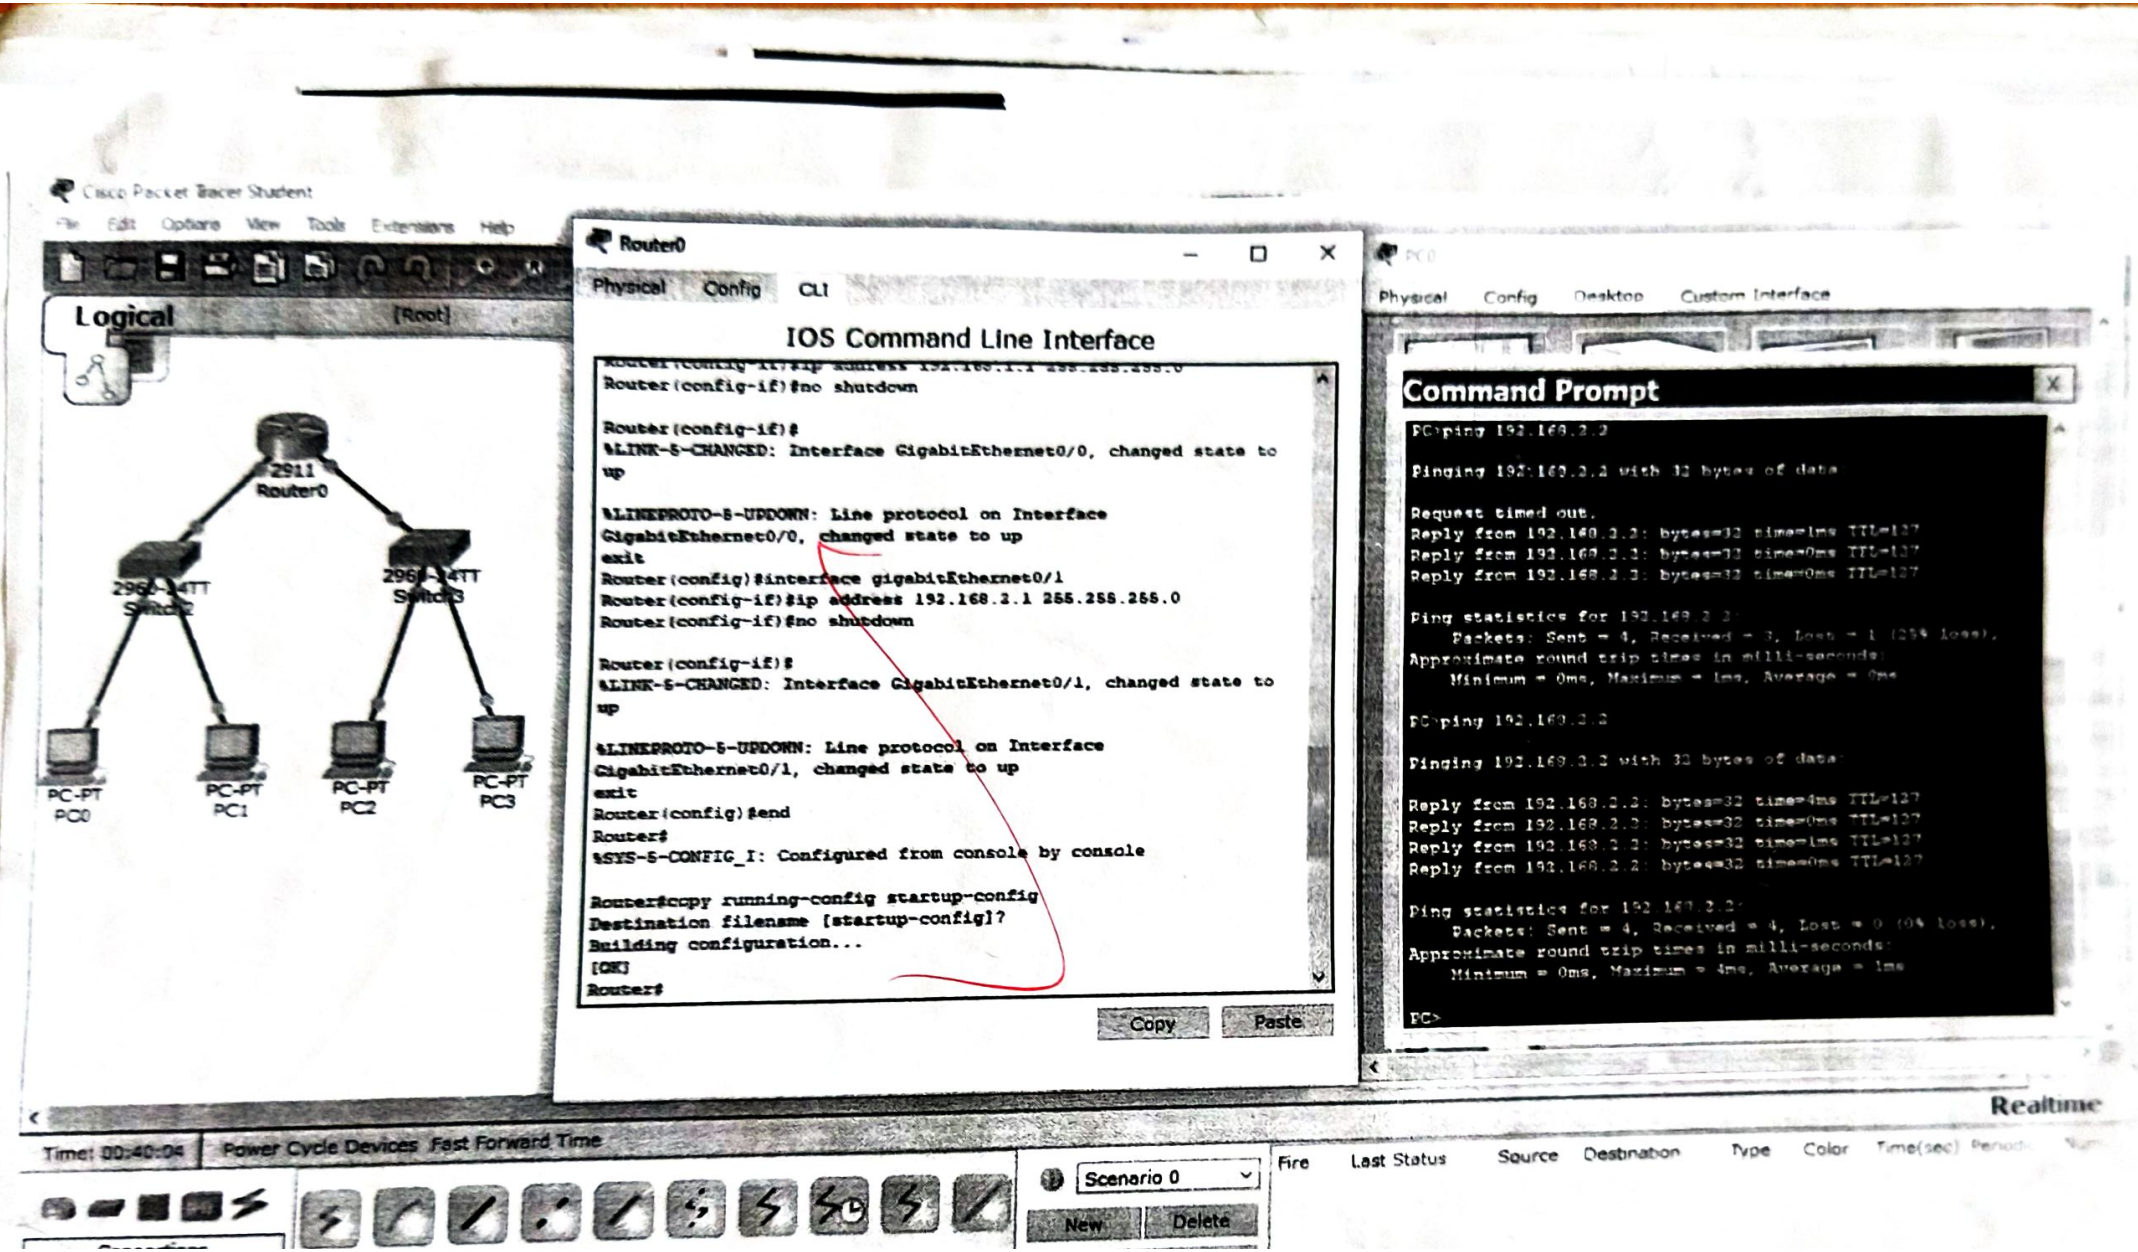
Step 8: Configure PC0

Step 9: Configure PC1

Step 10: Configure PC2

Step 11: Configure PC3

Step 12: Test connectivity


Cisco Packet Tracer Student
File Edit Options View Tools Extensions Help
Logical
[Root]
2911
Router0
PC-PT
PC0
PC-PT
PC1
PC-PT
PC2
PC-PT
PC3
Router0
Physical Config CLI
IOS Command Line Interface
Router(config-if)#no shutdown
Router(config-if)#
%LINK-5-CHANGED: Interface GigabitEthernet0/0, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/0, changed state to up
exit
Router(config)#interface gigabitEthernet0/1
Router(config-if)#ip address 192.168.2.1 255.255.255.0
Router(config-if)#no shutdown
Router(config-if)#
%LINK-5-CHANGED: Interface GigabitEthernet0/1, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/1, changed state to up
exit
Router(config)#end
Router#
%SYS-5-CONFIG_I: Configured from console by console
Router#copy running-config startup-config
Destination filename [startup-config]?
Building configuration...
[OK]
Router#
Copy
Paste
Physical Config Desktop Custom Interface
Command Prompt
PC>ping 192.168.2.2
Pinging 192.168.2.2 with 32 bytes of data
Request timed out.
Reply from 192.168.2.2: bytes=32 time=1ms TTL=127
Reply from 192.168.2.2: bytes=32 time=0ms TTL=127
Reply from 192.168.2.2: bytes=32 time=0ms TTL=127
Ping statistics for 192.168.2.2:
Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 1ms, Average = 0ms
PC>ping 192.168.2.2
Pinging 192.168.2.2 with 32 bytes of data:
Reply from 192.168.2.2: bytes=32 time=4ms TTL=127
Reply from 192.168.2.2: bytes=32 time=0ms TTL=127
Reply from 192.168.2.2: bytes=32 time=1ms TTL=127
Reply from 192.168.2.2: bytes=32 time=0ms TTL=127
Ping statistics for 192.168.2.2:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 4ms, Average = 1ms
PC>
Realtime
Time: 00:40:04
Power Cycle Devices Fast Forward Time
Scenario 0
New
Delete
Fire
Last Status
Source
Destination
Type
Color
Time(sec)

Result:

We designed and configured a simple network topology consist of one router, two switches and four PCs using Cisco Packet Tracer.