

# S Series PTZ 4G/5G



Side



Back



Front

## TECHNICAL SPECIFICATIONS

### Streaming Details

|                            |                                                 |
|----------------------------|-------------------------------------------------|
| MP Resolution              | 3MP                                             |
| Resolution In K            | 2.2K                                            |
| Resolution In Pixel        | 2304 x 1296                                     |
| Max Video Streaming        | 2304 x 1296 (30fps)                             |
| Streaming Capability       | 2 Streams                                       |
| Sub Stream                 | 800 x 448                                       |
| Video Compression Baseline | H.264/H.265, H.264+/H.265+, Support Dual Stream |
| Frame Rate                 | Up To 30fps                                     |
| Video Management Systems   | Compitable With 3rd Party VMS (API Support)     |
| Aspect Ratio               | 16:9                                            |
| Gain Control               | Auto                                            |
| IR Light Control           | Smart IR (Auto/Manual)                          |
| Removable IR-Cut Filter    | Not Removable                                   |

## Streaming Details

|                |                                                                                                                                                                                                                                                 |
|----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| White Balance  | Automatic                                                                                                                                                                                                                                       |
| Image Rotation | Mirror Image; Rotation 90°; Rotation 180°; Rotation 270° Including Up Right Mode; Backlight Compensation (BLC); Sharpness Enhancement; Intelligent Defog; Pixel Counter; Saturation; Brightness; Video Watermarking; Display Stamping; Location |

## Optical Details

|                            |                                                |
|----------------------------|------------------------------------------------|
| Image Sensors              | 1/2.8" CMOS Sensor                             |
| Lens                       | 4mm                                            |
| Lens Mounting Type         | M12                                            |
| Horizontal Field View      | 68°                                            |
| Vertical Field View        | 41°                                            |
| Day And Night              | ICR Infrared Filter                            |
| Minimum Illumination Color | Color: 0.1Lux                                  |
| Minimum Illumination B/W   | B/W 0.01 Lux                                   |
| Shutter Speed              | 1/2 - 1/20,000s                                |
| System On Chip Memory      | Embedded 1 Gb DDR3LSPI NOR/SPI NAND/EMMC SD2.0 |
| Max Aperture               | F 2.8                                          |
| Zoom                       | Up To 10X Digital Zoom Support                 |
| Imaging Area               | 5.38 mm × 3.02 mm                              |
| Exposure Mode              | Auto                                           |
| BLC Mode                   | Auto                                           |
| IR Reverse                 | Support                                        |
| Scanning System            | Progressive                                    |

## Electrical Details

|                      |                 |
|----------------------|-----------------|
| Power                | DC 12V 1.5A     |
| Connectors           | Ethernet, Power |
| Operating Conditions | -0°C To +60°C   |
| Power Consumption    | <= 15W          |

## Connectivity Details

|          |                                                                                                                                                                        |
|----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SIM Card | 4G SIM (CAT 1) - LTE-FDD : B1/B3/B5/B8 , LTE-TDD : B34/B38/B39/B40/B41                                                                                                 |
|          | 5G SIM (CAT 1) ,5G-NR-NSA : N41/N78/N79, 5G-NR-SA : N1/N28*/N41/N77/ N78/N79, LTE-FDD : B1/B2/B3/B5/B7/B8/B20/B28, LTE-TDD : B34/B28/B39/ B40/B41, WCDMA : B1/B2/B5/B8 |

## Approval Certifications

|           |                    |
|-----------|--------------------|
| Approvals | FCC, BIS, CE, RoHS |
|-----------|--------------------|

## Compliance Details

|                 |           |
|-----------------|-----------|
| ONVIF Compliant | Onvif 2.4 |
|-----------------|-----------|

## Software Details

|                      |                                      |
|----------------------|--------------------------------------|
| Language             | English                              |
| Iris Control         | Auto/ Manual                         |
| Flicker Control      | Auto                                 |
| Milestone Supported  | Yes                                  |
| Genetec Supported    | Yes                                  |
| Camera Title         | Text Overlay                         |
| OS/ Firmware Protect | Signed Firmware, Firmware Encryption |
| User Authentication  | HTTP Password Protection             |
| Device ID            | Support Private UID                  |

## Software Details

|                                   |                                                                                                                                                                              |
|-----------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Encryption                        | AES 256                                                                                                                                                                      |
| Linkage Method                    | Upload To FTP, Push To HTTP Server                                                                                                                                           |
| Image Enhancement                 | Auto                                                                                                                                                                         |
| Client                            | Web, APP                                                                                                                                                                     |
| Web Browser                       | Chrome, Microsoft® Edge, Mozilla Firefox                                                                                                                                     |
| Supported OS                      | Windows / Linux                                                                                                                                                              |
| Image Settings                    | Flip, Mirror, Brightness, Contrast, Saturation, Hue, Sharpness                                                                                                               |
| Security                          | User Account And Password Protection, HTTP Encryption, SSL Encryption                                                                                                        |
| Network Protocols                 | HTTP, TCP/IP, IPv4, DHCP, RTSP, ONVIF, P2P, RTMP                                                                                                                             |
| Application Programming Interface | Open API For Software Integration                                                                                                                                            |
| Event Conditions                  | Unattended Baggage Detection, Missing Object Detection, Line Cross Detection, Area Detection, Customer Traffic Statistics, Motion Detection, Human Detection, Face Detection |
| Event Actions                     | Real Time Notification                                                                                                                                                       |
| Text Overlay                      | Title, Date & Time, Weekday                                                                                                                                                  |
| Applications                      | ArcisAI                                                                                                                                                                      |
| Bitrate Control                   | CBR/VBR, Bitrate : 32Kbps~10Mbps Variable                                                                                                                                    |
| Smart Phone                       | IOS, Android                                                                                                                                                                 |

## Hardware Details

|              |                       |
|--------------|-----------------------|
| Casing       | Engineering Plastic   |
| Casing Color | White                 |
| Lens Control | Fixed Focus           |
| Material     | Polycarbonate Housing |

## Hardware Details

|                          |                                                  |
|--------------------------|--------------------------------------------------|
| Mounting Type            | Wall, Ceiling, Pole                              |
| Waterproof Standard      | IP66                                             |
| Lightning Protection     | 4 KV                                             |
| White Light Illumination | 15-20 M                                          |
| Pan Range                | 350°                                             |
| Tilt Range               | 0°- 90°                                          |
| P/T Presets              | 129                                              |
| Storage                  | Support TF Card Storage Up To 256GB              |
| Reset                    | Reset Via App, VMS Software And Hardware Button  |
| Fill Light Distance      | 20-30 M                                          |
| IR Distance              | Up To 50M                                        |
| No. Of LED Lights        | 18                                               |
| Cabling                  | LAN Cable With Ethernet, Reset Pin And Power Pin |

## Audio Details

|                           |                          |
|---------------------------|--------------------------|
| Audio Function            | Two-Way Audio            |
| Dynamic Range             | HDR                      |
| 3D Noise Reduction Filter | 3D DNR                   |
| Signal To Noise Ratio     | >55 DB                   |
| Audio Compression         | AAC, G711                |
| Frequency Range           | 60Hz/50Hz                |
| Audio Bit Rate            | 8 Kbps - 1024 Kbps       |
| Audio Input & Output      | Built In MIC And Speaker |


## Features

|                              |                                                                                                       |
|------------------------------|-------------------------------------------------------------------------------------------------------|
| Unattended Baggage Detection | The Event Is Triggered When An Object Stays Into The Region Of Interested Area For A Designated Time. |
| Missing Object Detection     | The Event Is Triggered When An Object Moves Away From The Region Of Interest.                         |
| Line Cross Detection         | The Event Is Triggered When An Object Moves Through A Line Of Region.                                 |
| Area Detection               | The Event Records People Who Moved In/Out Of The Region Of Interest.                                  |
| Customer Traffic Statistics  | The Event Records People Who Moved In/Out Of The Region Of Interest.                                  |
| Motion Detection             | The Event Is Triggered When A Motion Is Detected.                                                     |
| Human Detection              | The Event Is Triggered When A Human Is Detected.                                                      |
| Face Detection               | The Event Is Triggered When A Face Is Detected.                                                       |

## Additional Details

|                      |                                             |
|----------------------|---------------------------------------------|
| Included Accessories | Wall Mount Stand, Screw Bag, Waterproof Cap |
| Optional Accessories | Power Adapter, TF Card                      |
| Documentation        | Warranty Card, User Manual                  |
| Warranty             | 2 Years                                     |
| Dimensions           | 150x162x315 (mm)                            |
| Product Weight       | 800gm                                       |
| Package Weight       | 900gm                                       |
| Country Of Origin    | India                                       |

## PRODUCT DIMENSIONS

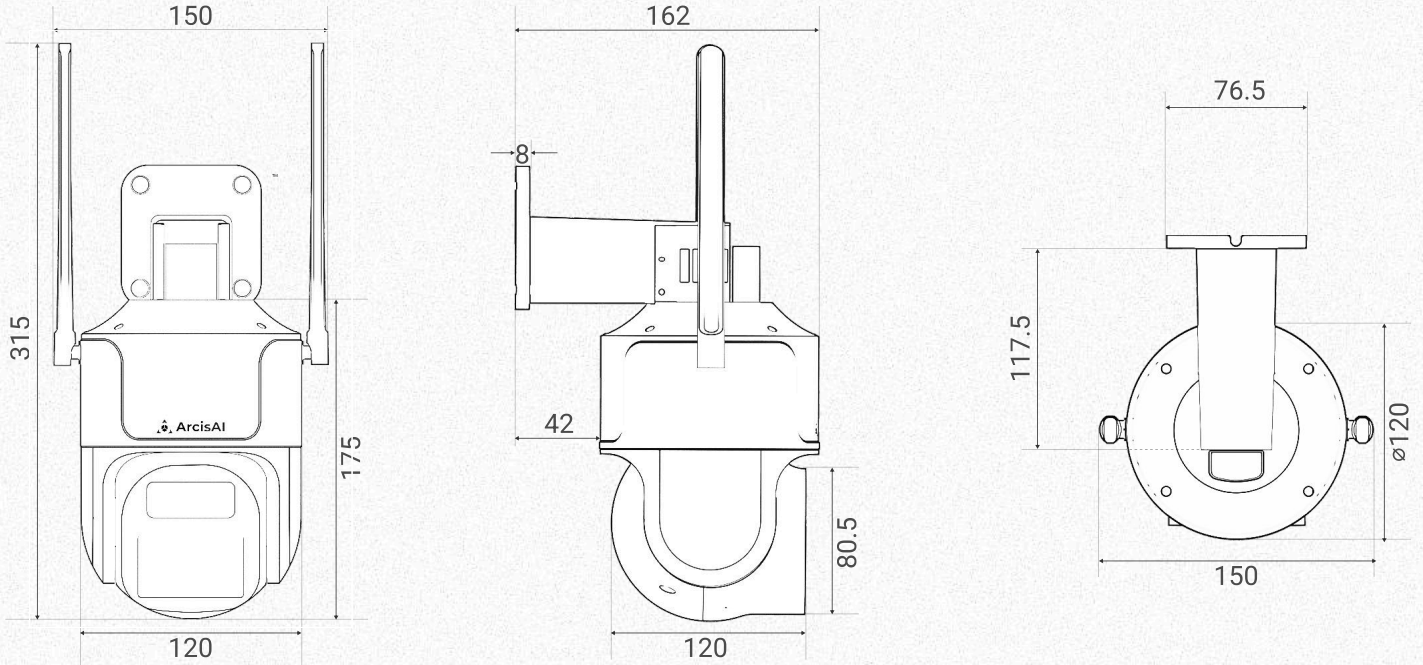

Note: All dimensions are in mm



Scan to see how  
our AI works



IS 13252(part 1)/  
IEC 60950-1

R-72003735  
www.bis.gov.in

