
Chapter 6

The Transport Layer

The Transport Service

- Services Provided to the Upper Layers
- Transport Service Primitives
- Berkeley Sockets
- An Example of Socket Programming:
 - An Internet File Server

Services Provided to the Upper Layers

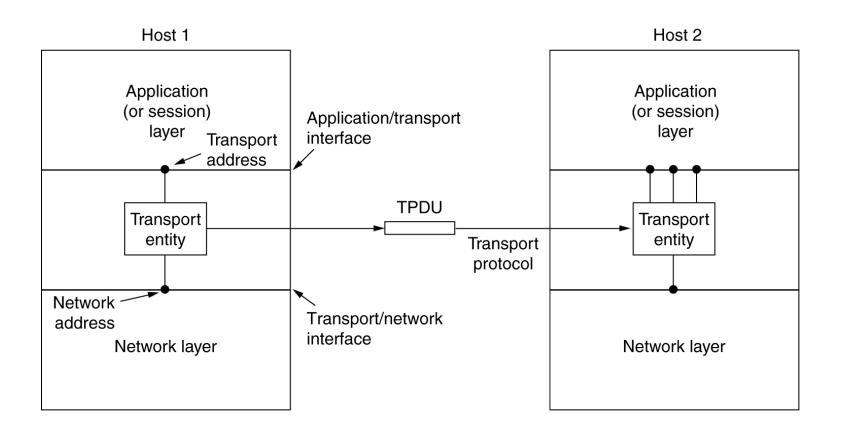


The network, transport, and application layers.

Transport Service Primitives

Primitive	Packet sent	Meaning
LISTEN	(none)	Block until some process tries to connect
CONNECT	CONNECTION REQ.	Actively attempt to establish a connection
SEND	DATA	Send information
RECEIVE	(none)	Block until a DATA packet arrives
DISCONNECT	DISCONNECTION REQ.	This side wants to release the connection


The primitives for a simple transport service.

Transport Service Primitives (2)

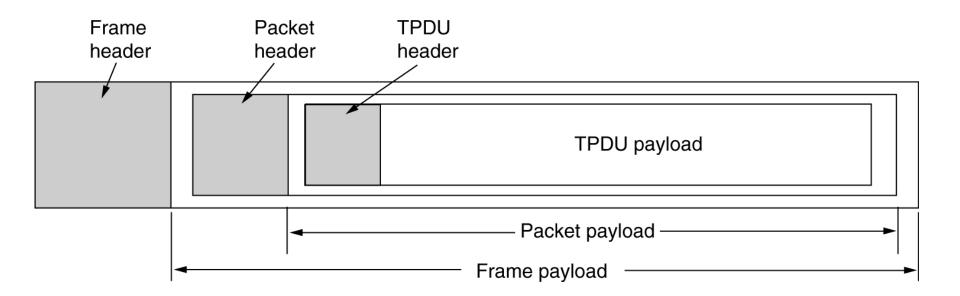

The nesting of TPDUs, packets, and frames.

Transport Service Primitives (3)

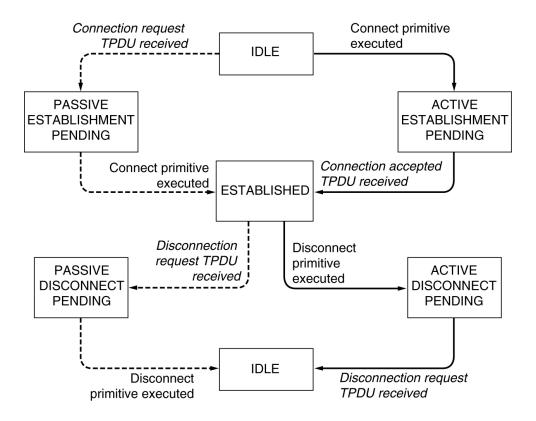

A state diagram for a simple connection management scheme. Transitions labeled in italics are caused by packet arrivals. The solid lines show the client's state sequence. The dashed lines show the server's state sequence.

Berkeley Sockets

Primitive	Meaning	
SOCKET	Create a new communication end point	
BIND	Attach a local address to a socket	
LISTEN	Announce willingness to accept connections; give queue size	
ACCEPT	Block the caller until a connection attempt arrives	
CONNECT	Actively attempt to establish a connection	
SEND	Send some data over the connection	
RECEIVE	Receive some data from the connection	
CLOSE	Release the connection	

The socket primitives for TCP.

Socket Programming Example: Internet File Server

Client code using sockets.

```
/* This page contains a client program that can request a file from the server program
* on the next page. The server responds by sending the whole file.
#include <sys/types.h>
#include <sys/socket.h>
#include <netinet/in.h>
#include <netdb.h>
#define SERVER PORT 12345
                                            /* arbitrary, but client & server must agree */
#define BUF SIZE 4096
                                            /* block transfer size */
int main(int argc, char **argv)
 int c, s, bytes;
 char buf[BUF SIZE];
                                            /* buffer for incoming file */
 struct hostent *h;
                                            /* info about server */
 struct sockaddr in channel;
                                            /* holds IP address */
 if (argc != 3) fatal("Usage: client server-name file-name");
 h = gethostbyname(argv[1]);
                                            /* look up host's IP address */
 if (!h) fatal("gethostbyname failed");
 s = socket(PF_INET, SOCK_STREAM, IPPROTO_TCP);
 if (s <0) fatal("socket");
 memset(&channel, 0, sizeof(channel));
 channel.sin_family= AF_INET;
 memcpy(&channel.sin addr.s addr, h->h addr, h->h length);
 channel.sin_port= htons(SERVER_PORT);
 c = connect(s, (struct sockaddr *) &channel, sizeof(channel));
 if (c < 0) fatal("connect failed");
 /* Connection is now established. Send file name including 0 byte at end. */
 write(s, argv[2], strlen(argv[2])+1);
 /* Go get the file and write it to standard output. */
 while (1) {
    bytes = read(s, buf, BUF_SIZE);
                                            /* read from socket */
                                            /* check for end of file */
    if (bytes \leq 0) exit(0);
    write(1, buf, bytes);
                                            /* write to standard output */
fatal(char *string)
 printf("%s\n", string);
 exit(1);
```

Socket Programming Example: Internet File Server (2)


Client code using sockets.

```
#include <sys/types.h>
                                             /* This is the server code */
#include <sys/fcntl.h>
#include <sys/socket.h>
#include <netinet/in.h>
#include <netdb.h>
#define SERVER_PORT 12345
                                            /* arbitrary, but client & server must agree */
#define BUF SIZE 4096
                                             /* block transfer size */
#define QUEUE SIZE 10
int main(int argc, char *argv[])
 int s, b, l, fd, sa, bytes, on = 1;
 char buf[BUF_SIZE];
                                             /* buffer for outgoing file */
 struct sockaddr_in channel;
                                             /* hold's IP address */
 /* Build address structure to bind to socket. */
 memset(&channel, 0, sizeof(channel));
                                            /* zero channel */
 channel.sin_family = AF_INET;
 channel.sin_addr.s_addr = htonl(INADDR_ANY);
 channel.sin port = htons(SERVER PORT);
 /* Passive open. Wait for connection. */
 s = socket(AF INET, SOCK STREAM, IPPROTO TCP); /* create socket */
 if (s < 0) fatal("socket failed");
 setsockopt(s, SOL_SOCKET, SO_REUSEADDR, (char *) &on, sizeof(on));
 b = bind(s, (struct sockaddr *) &channel, sizeof(channel));
 if (b < 0) fatal("bind failed");
                                            /* specify queue size */
 I = listen(s, QUEUE_SIZE);
 if (I < 0) fatal("listen failed");
 /* Socket is now set up and bound. Wait for connection and process it. */
 while (1) {
                                            /* block for connection request */
     sa = accept(s, 0, 0);
    if (sa < 0) fatal("accept failed");
    read(sa, buf, BUF_SIZE);
                                             /* read file name from socket */
     /* Get and return the file. */
                                            /* open the file to be sent back */
     fd = open(buf, O RDONLY);
    if (fd < 0) fatal("open failed");
     while (1) {
          bytes = read(fd, buf, BUF_SIZE); /* read from file */
          if (bytes <= 0) break;
                                            /* check for end of file */
          write(sa, buf, bytes);
                                            /* write bytes to socket */
     close(fd);
                                            /* close file */
                                             /* close connection */
     close(sa);
```

Elements of Transport Protocols


- Addressing
- Connection Establishment
- Connection Release
- Flow Control and Buffering
- Multiplexing
- Crash Recovery

Transport Protocol

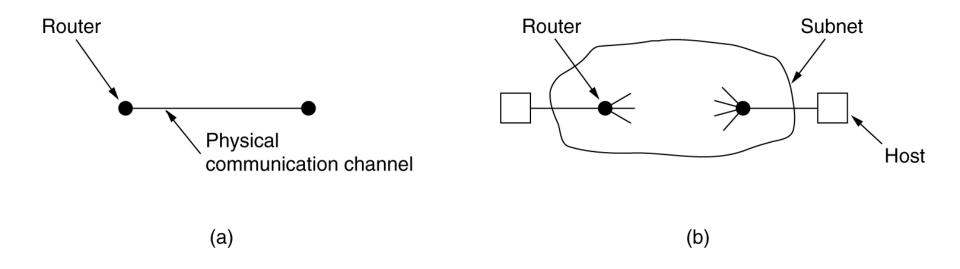


- (a) Environment of the data link layer.
- (b) Environment of the transport layer.

Addressing

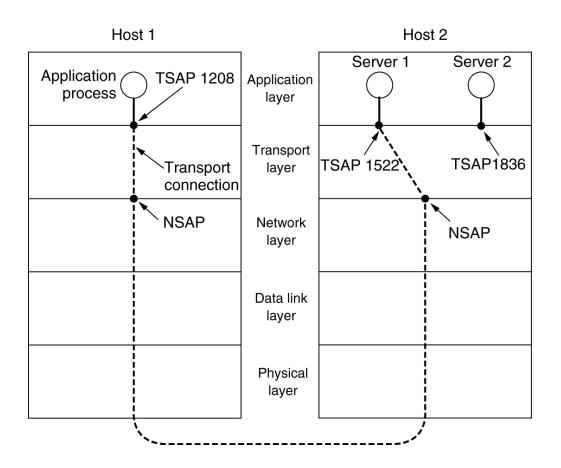


TSAPs, NSAPs and transport connections.

Connection Establishment

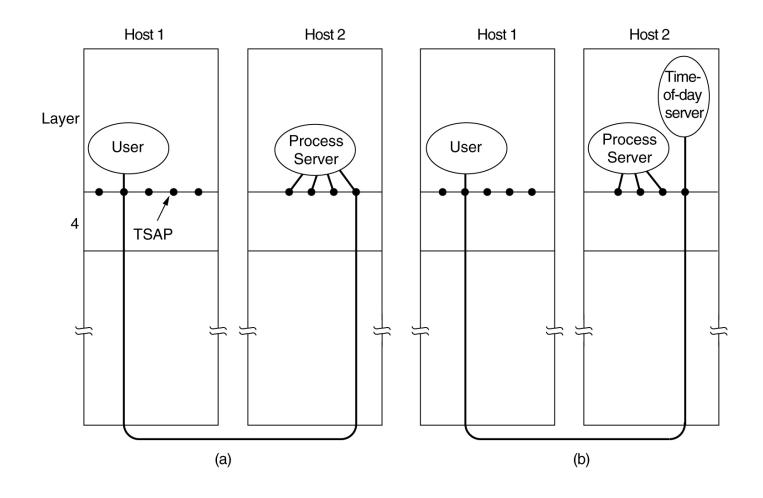


How a user process in host 1 establishes a connection with a time-of-day server in host 2.

Connection Establishment (2)

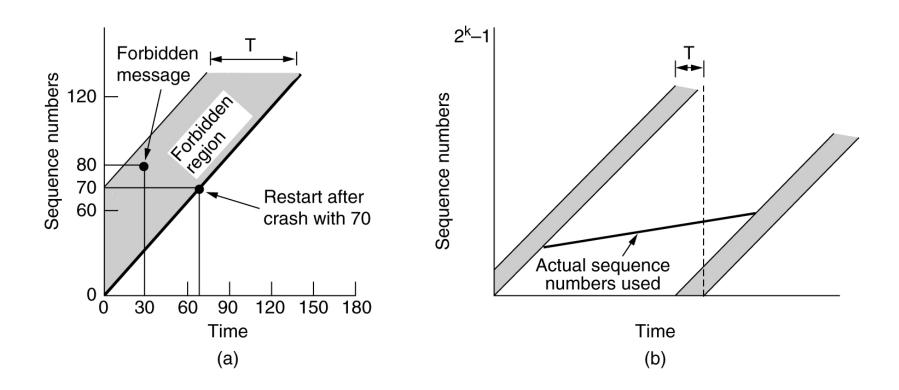

- (a) TPDUs may not enter the forbidden region.
- (b) The resynchronization problem.


Connection Establishment (3)

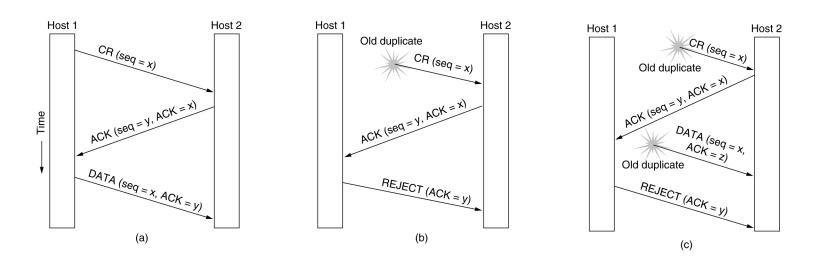

Three protocol scenarios for establishing a connection using a three-way handshake. CR denotes CONNECTION REQUEST.


- (a) Normal operation,
- (b) Old CONNECTION REQUEST appearing out of nowhere.
- (c) Duplicate CONNECTION REQUEST and duplicate ACK.

Connection Release

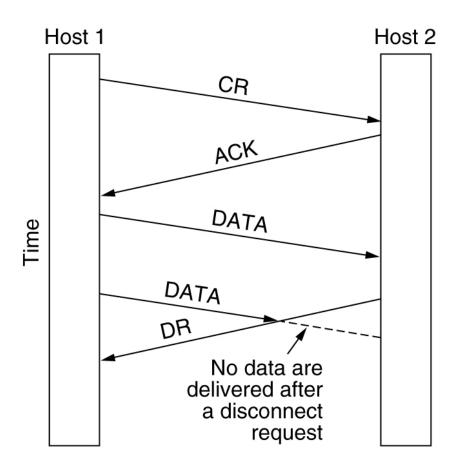


Abrupt disconnection with loss of data.

Connection Release (2)

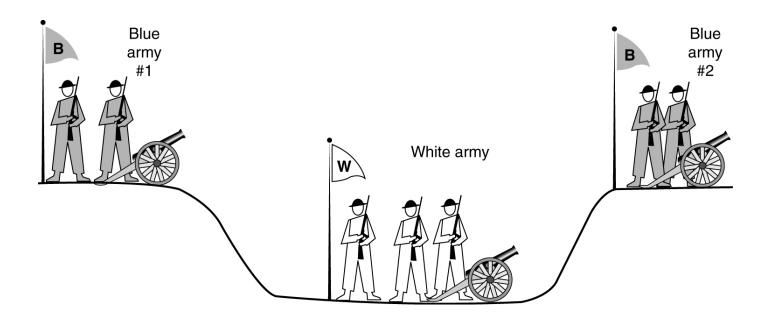


The two-army problem.

Connection Release (3)

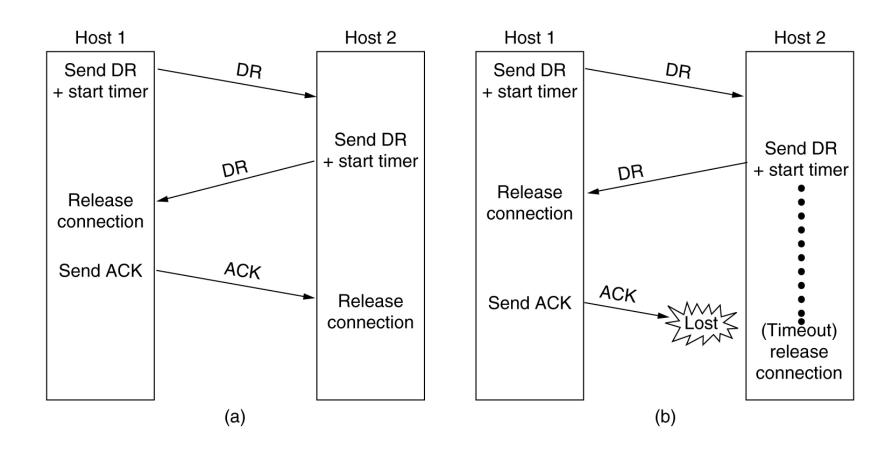


Four protocol scenarios for releasing a connection. (a) Normal case of a three-way handshake. (b) final ACK lost.

Connection Release (4)

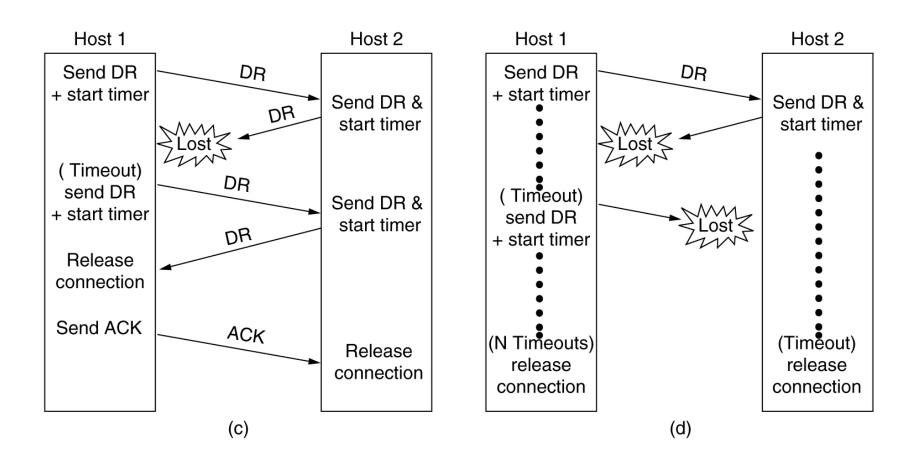

(c) Response lost. (d) Response lost and subsequent DRs lost.

Flow Control and Buffering

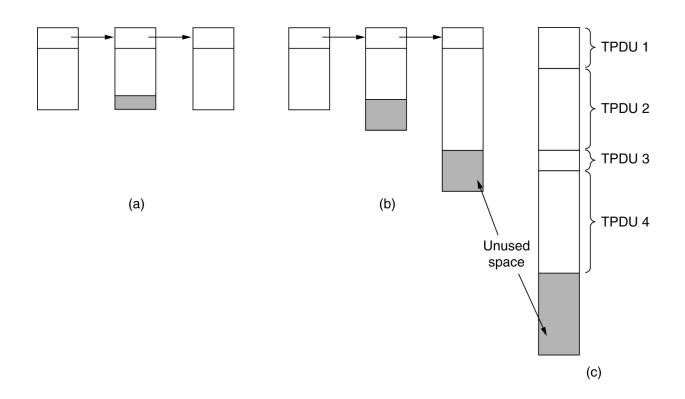


- (a) Chained fixed-size buffers. (b) Chained variable-sized buffers.
- (c) One large circular buffer per connection.

Flow Control and Buffering (2)

	A	Message	В	Comments
1		< request 8 buffers>		A wants 8 buffers
2	←	<ack = 15, buf = 4 $>$	←	B grants messages 0-3 only
3		<seq = 0, data = m0 $>$	-	A has 3 buffers left now
4		<seq = 1, data = m1 $>$	-	A has 2 buffers left now
5	-	<seq = 2, data = m2 $>$	•••	Message lost but A thinks it has 1 left
6	←	<ack = 1, buf = 3 $>$	←	B acknowledges 0 and 1, permits 2-4
7	-	<seq = 3, data = m3 $>$		A has 1 buffer left
8		<seq 4,="" =="" data="m4"></seq>	-	A has 0 buffers left, and must stop
9	-	<seq = 2, data = m2 $>$	-	A times out and retransmits
10	←	<ack = 4, buf = 0 $>$	←	Everything acknowledged, but A still blocked
11	←	<ack = 4, buf = 1>	•	A may now send 5
12	←	<ack = 4, buf = 2 $>$	•	B found a new buffer somewhere
13	-	<seq = 5, data = m5 $>$	-	A has 1 buffer left
14		<seq = 6, data = m6 $>$	-	A is now blocked again
15	←	<ack = 6, buf = 0>	←	A is still blocked
16	• • •	<ack = 6, buf = 4 $>$	←	Potential deadlock

Dynamic buffer allocation. The arrows show the direction of transmission. An ellipsis (...) indicates a lost TPDU.

Multiplexing

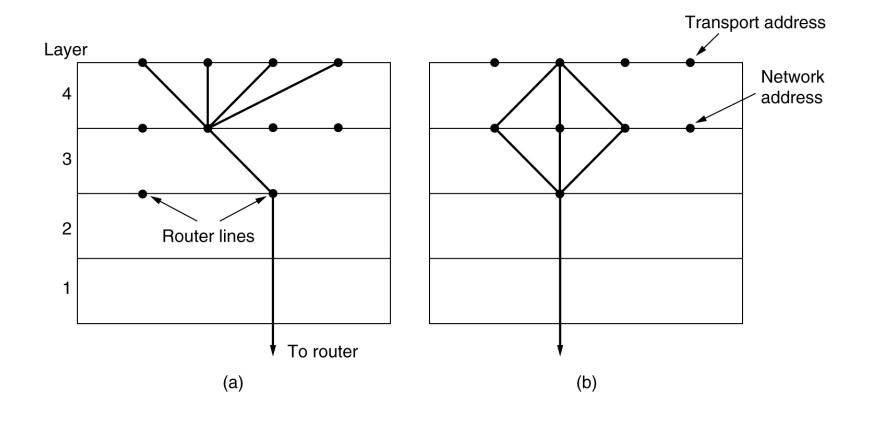

(a) Upward multiplexing. (b) Downward multiplexing.

Crash Recovery

Strategy used by receiving host

C(AW)

OK

LOST

LOST

OK

	First	ACK, then	write
Strategy used by sending host	AC(W)	AWC	C(A
Always retransmit	ОК	DUP	0
Never retransmit	LOST	ОК	LO
Retransmit in S0	ОК	DUP	LO
Retransmit in S1	LOST	ОК	0

C(WA)	W AC	WC(A)
OK	DUP	DUP
LOST	OK	OK
LOST	DUP	ОК
OK	OK	DUP

First write, then ACK

OK = Protocol functions correctly

DUP = Protocol generates a duplicate message

LOST = Protocol loses a message

Different combinations of client and server strategy.

A Simple Transport Protocol

- The Example Service Primitives
- The Example Transport Entity
- The Example as a Finite State Machine

The Example Transport Entity

Network packet	Meaning
CALL REQUEST	Sent to establish a connection
CALL ACCEPTED	Response to CALL REQUEST
CLEAR REQUEST	Sent to release a connection
CLEAR CONFIRMATION	Response to CLEAR REQUEST
DATA	Used to transport data
CREDIT	Control packet for managing the window

The network layer packets used in our example.

The Example Transport Entity (2)

Each connection is in one of seven states:

- Idle Connection not established yet.
- 2. Waiting CONNECT has been executed, CALL REQUEST sent.
- 3. Queued A CALL REQUEST has arrived; no LISTEN yet.
- 4. Established The connection has been established.
- 5. Sending The user is waiting for permission to send a packet.
- 6. Receiving A RECEIVE has been done.
- 7. DISCONNECTING a DISCONNECT has been done locally.

The Example Transport Entity (3)

```
/* max number of simultaneous connections */
#define MAX CONN 32
#define MAX_MSG_SIZE 8192
                                          /* largest message in bytes */
                                          /* largest packet in bytes */
#define MAX PKT SIZE 512
#define TIMEOUT 20
#define CRED 1
#define OK 0
#define ERR FULL -1
#define ERR REJECT -2
#define ERR_CLOSED -3
#define LOW ERR -3
typedef int transport_address;
typedef enum {CALL_REQ,CALL_ACC,CLEAR_REQ,CLEAR_CONF,DATA_PKT,CREDIT} pkt_type;
typedef enum {IDLE,WAITING,QUEUED,ESTABLISHED,SENDING,RECEIVING,DISCONN} cstate;
/* Global variables. */
transport_address listen_address;
                                          /* local address being listened to */
                                          /* connection identifier for listen */
int listen conn;
unsigned char data[MAX_PKT_SIZE];
                                          /* scratch area for packet data */
struct conn {
 transport_address local_address, remote_address;
                                          /* state of this connection */
 cstate state:
 unsigned char *user_buf_addr;
                                          /* pointer to receive buffer */
                                          /* send/receive count */
 int byte_count;
 int clr req received;
                                          /* set when CLEAR REQ packet received */
                                          /* used to time out CALL REQ packets */
 int timer;
 int credits:
                                          /* number of messages that may be sent */
} conn[MAX CONN + 1];
                                          /* slot 0 is not used */
```

The Example Transport Entity (4)

```
void sleep(void);
                                              /* prototypes */
void wakeup(void);
void to net(int cid, int q, int m, pkt_type pt, unsigned char *p, int bytes);
void from net(int *cid, int *q, int *m, pkt type *pt, unsigned char *p, int *bytes);
int listen(transport_address t)
{ /* User wants to listen for a connection. See if CALL_REQ has already arrived. */
 int i, found = 0;
 for (i = 1; i <= MAX_CONN; i++)
                                             /* search the table for CALL REQ */
     if (conn[i].state == QUEUED && conn[i].local address == t) {
          found = i:
          break;
 if (found == 0) {
     /* No CALL_REQ is waiting. Go to sleep until arrival or timeout. */
     listen_address = t; sleep(); i = listen_conn;
 conn[i].state = ESTABLISHED;
                                             /* connection is ESTABLISHED */
 conn[i].timer = 0;
                                             /* timer is not used */
```

The Example Transport Entity (5)

```
/* 0 is assumed to be an invalid address */
 listen conn = 0;
                                             /* tell net to accept connection */
 to_net(i, 0, 0, CALL_ACC, data, 0);
                                             /* return connection identifier */
 return(i);
int connect(transport_address I, transport_address r)
{ /* User wants to connect to a remote process; send CALL_REQ packet. */
 int i;
 struct conn *cptr;
                                            /* CALL_REQ packet needs these */
 data[0] = r; data[1] = I;
                                             /* search table backward */
 i = MAX CONN;
 while (conn[i].state != IDLE && i > 1) i = i -1;
 if (conn[i].state == IDLE) {
    /* Make a table entry that CALL_REQ has been sent. */
    cptr = &conn[i];
    cptr->local address = I; cptr->remote_address = r;
    cptr->state = WAITING; cptr->clr_req_received = 0;
    cptr->credits = 0; cptr->timer = 0;
    to_net(i, 0, 0, CALL_REQ, data, 2);
    sleep();
                                             /* wait for CALL ACC or CLEAR REQ */
    if (cptr->state == ESTABLISHED) return(i);
    if (cptr->clr_req_received) {
         /* Other side refused call. */
          cptr->state = IDLE;
                                            /* back to IDLE state */
         to net(i, 0, 0, CLEAR_CONF, data, 0);
          return(ERR REJECT):
 } else return(ERR FULL);
                                             /* reject CONNECT: no table space */
```

The Example Transport Entity (6)

```
int send(int cid, unsigned char bufptr[], int bytes)
{ /* User wants to send a message. */
 int i, count, m;
 struct conn *cptr = &conn[cid];
 /* Enter SENDING state. */
 cptr->state = SENDING;
 cptr->byte count = 0;
                                             /* # bytes sent so far this message */
 if (cptr->clr_req_received == 0 && cptr->credits == 0) sleep();
 if (cptr->clr_req_received == 0) {
    /* Credit available; split message into packets if need be. */
     do {
          if (bytes - cptr->byte_count > MAX_PKT_SIZE) {/* multipacket message */
               count = MAX_PKT_SIZE; m = 1; /* more packets later */
                                             /* single packet message */
          } else {
               count = bytes - cptr->byte_count; m = 0; /* last pkt of this message */
          for (i = 0; i < count; i++) data[i] = bufptr[cptr->byte_count + i];
          to_net(cid, 0, m, DATA_PKT, data, count); /* send 1 packet */
          cptr->byte_count = cptr->byte_count + count; /* increment bytes sent so far */
     } while (cptr->byte_count < bytes); /* loop until whole message sent */</pre>
```

The Example Transport Entity (7)

```
/ * each message uses up one credit */
    cptr->credits - -;
    cptr->state = ESTABLISHED;
    return(OK);
 } else {
    cptr->state = ESTABLISHED;
    return(ERR_CLOSED);
                                            /* send failed: peer wants to disconnect */
int receive(int cid, unsigned char bufptr[], int *bytes)
{ /* User is prepared to receive a message. */
 struct conn *cptr = &conn[cid]:
 if (cptr->clr_req_received == 0) {
    /* Connection still established; try to receive. */
    cptr->state = RECEIVING;
    cptr->user_buf_addr = bufptr;
    cptr->byte count = 0;
    data[0] = CRED;
    data[1] = 1;
                                            /* send credit */
    to_net(cid, 1, 0, CREDIT, data, 2);
    sleep();
                                            /* block awaiting data */
    *bytes = cptr->byte_count;
 cptr->state = ESTABLISHED:
 return(cptr->clr_req_received ? ERR_CLOSED : OK);
```

The Example Transport Entity (8)

```
int disconnect(int cid)
{ /* User wants to release a connection. */
 struct conn *cptr = &conn[cid];
 if (cptr->clr_req_received) {
                                            /* other side initiated termination */
    cptr->state = IDLE;
                                            /* connection is now released */
    to_net(cid, 0, 0, CLEAR_CONF, data, 0);
                                            /* we initiated termination */
 } else {
                                            /* not released until other side agrees */
    cptr->state = DISCONN;
    to net(cid, 0, 0, CLEAR REQ, data, 0);
 return(OK);
void packet arrival(void)
{ /* A packet has arrived, get and process it. */
                                            /* connection on which packet arrived */
 int cid;
 int count, i, q, m;
 pkt type ptype;
                  /* CALL REQ, CALL ACC, CLEAR REQ, CLEAR CONF, DATA PKT, CREDIT */
 unsigned char data[MAX_PKT_SIZE];
                                            /* data portion of the incoming packet */
 struct conn *cptr;
 from_net(&cid, &q, &m, &ptype, data, &count); /* go get it */
 cptr = &conn[cid];
```

The Example Transport Entity (9)


```
switch (ptype) {
  case CALL REQ:
                                          /* remote user wants to establish connection */
   cptr->local_address = data[0]; cptr->remote_address = data[1];
   if (cptr->local_address == listen_address) {
        listen conn = cid; cptr->state = ESTABLISHED; wakeup();
   } else {
        cptr->state = QUEUED; cptr->timer = TIMEOUT;
   cptr->clr reg received = 0; cptr->credits = 0;
   break;
  case CALL_ACC:
                                          /* remote user has accepted our CALL_REQ */
   cptr->state = ESTABLISHED;
   wakeup();
   break;
  case CLEAR REQ:
                                          /* remote user wants to disconnect or reject call */
   cptr->clr req received = 1;
   if (cptr->state == DISCONN) cptr->state = IDLE; /* clear collision */
   if (cptr->state == WAITING || cptr->state == RECEIVING || cptr->state == SENDING) wakeup();
   break:
  case CLEAR_CONF:
                                          /* remote user agrees to disconnect */
   cptr->state = IDLE;
   break;
  case CREDIT:
                                          /* remote user is waiting for data */
   cptr->credits += data[1];
   if (cptr->state == SENDING) wakeup();
   break;
  case DATA PKT:
                                          /* remote user has sent data */
   for (i = 0; i < count; i++) cptr->user buf addr[cptr->byte count + i] = data[i];
   cptr->byte_count += count;
   if (m == 0) wakeup();
```

The Example Transport Entity (10)

```
void clock(void)
{ /* The clock has ticked, check for timeouts of queued connect requests. */
 int i:
 struct conn *cptr;
 for (i = 1; i <= MAX_CONN; i++) {
     cptr = &conn[i];
     if (cptr->timer > 0) {
                                              /* timer was running */
          cptr->timer--;
          if (cptr->timer == 0) {
                                              /* timer has now expired */
               cptr->state = IDLE;
               to_net(i, 0, 0, CLEAR_REQ, data, 0);
```

The Example as a Finite State Machine

The example protocol as a finite state machine. Each entry has an optional predicate, an optional action, and the new state. The tilde indicates that no major action is taken. An overbar above a predicate indicate the negation of the predicate. Blank entries correspond to impossible or invalid events.

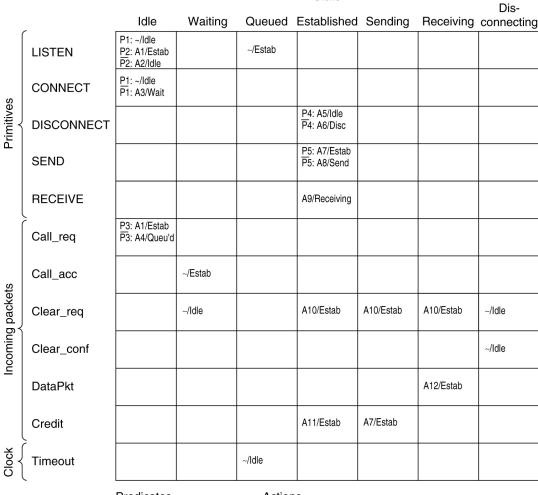

Predicates

P1: Connection table full

P2: Call_req pending

P3: LISTEN pending P4: Clear reg pending

P5: Credit available

Actions

A1: Send Call acc A2: Wait for Call req


A7: Send message A8: Wait for credit A9: Send credit

A3: Send Call_req A4: Start timer

A10: Set Clr reg received flag

A5: Send Clear_conf A11: Record credit A6: Send Clear reg A12: Accept message

The Example as a Finite State Machine (2)

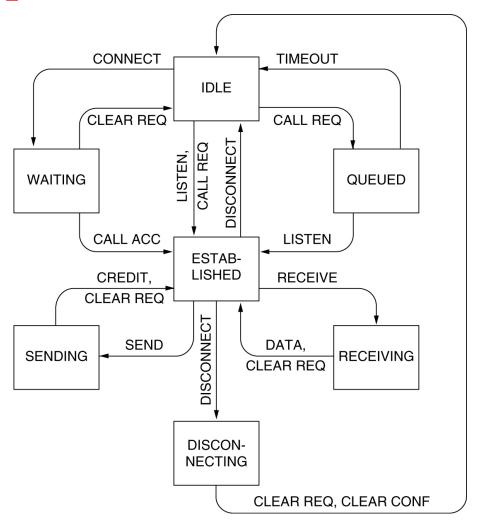


The example protocol in graphical form. Transitions that leave the connection state unchanged have been omitted for simplicity.

The Internet Transport Protocols: UDP


- Introduction to UDP
- Remote Procedure Call
- The Real-Time Transport Protocol

Introduction to UDP

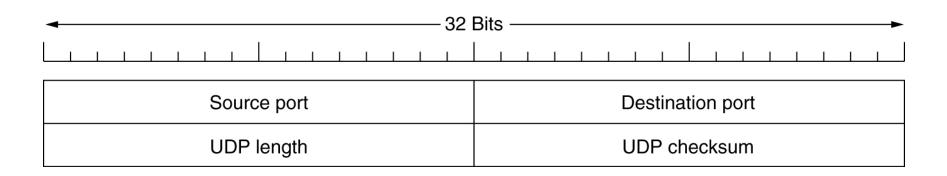


The UDP header.

Remote Procedure Call

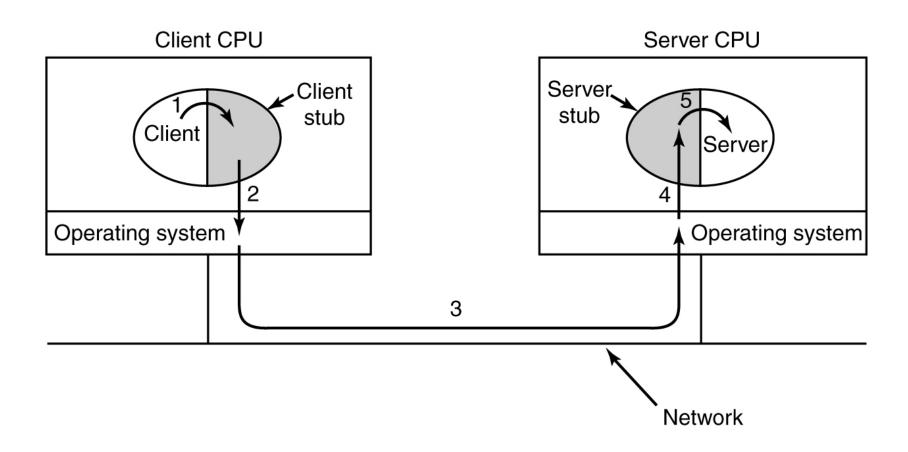


Steps in making a remote procedure call. The stubs are shaded.

The Real-Time Transport Protocol

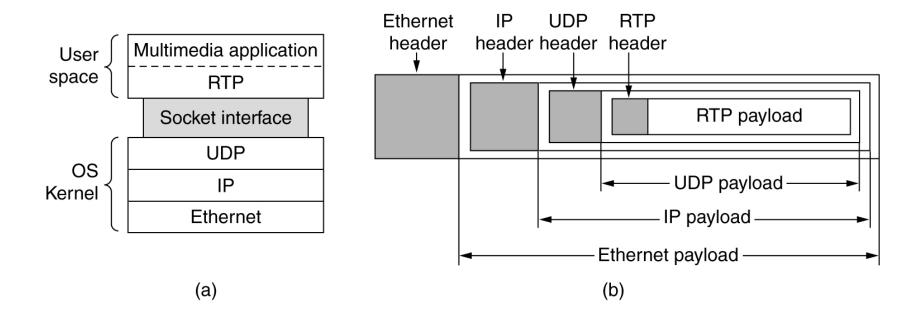

(a) The position of RTP in the protocol stack. (b) Packet nesting.

The Real-Time Transport Protocol (2)

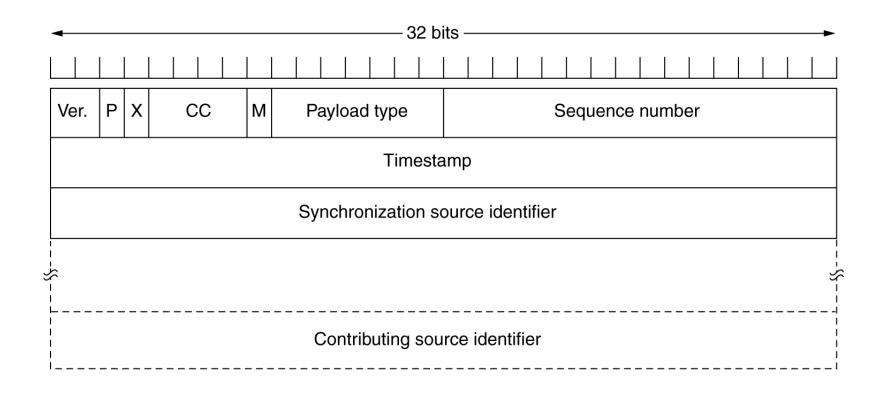

The RTP header.

The Internet Transport Protocols: TCP


- Introduction to TCP
- The TCP Service Model
- The TCP Protocol
- The TCP Segment Header
- TCP Connection Establishment
- TCP Connection Release
- TCP Connection Management Modeling
- TCP Transmission Policy
- TCP Congestion Control
- TCP Timer Management
- Wireless TCP and UDP
- Transactional TCP

The TCP Service Model

Port	Protocol	Use
21	FTP	File transfer
23	Telnet	Remote login
25	SMTP	E-mail
69	TFTP	Trivial File Transfer Protocol
79	Finger	Lookup info about a user
80	HTTP	World Wide Web
110	POP-3	Remote e-mail access
119	NNTP	USENET news


Some assigned ports.

The TCP Service Model (2)

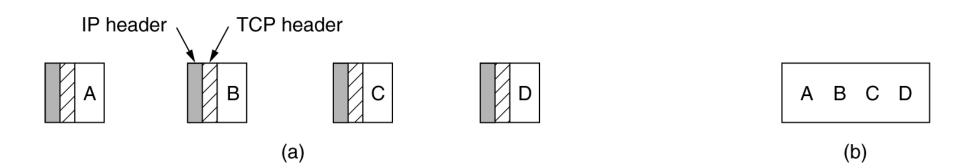


- (a) Four 512-byte segments sent as separate IP datagrams.
- (b) The 2048 bytes of data delivered to the application in a single READ CALL.

The TCP Segment Header

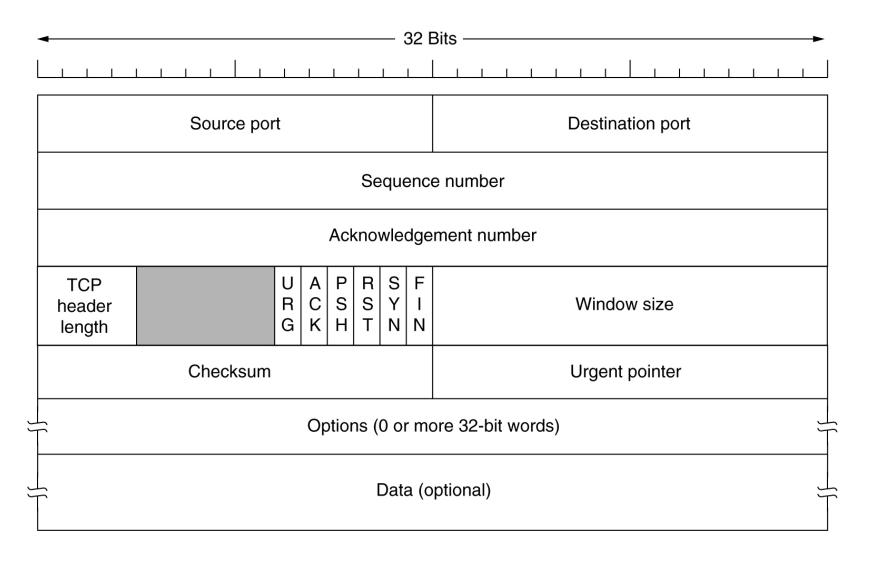


TCP Header.

The TCP Segment Header (2)

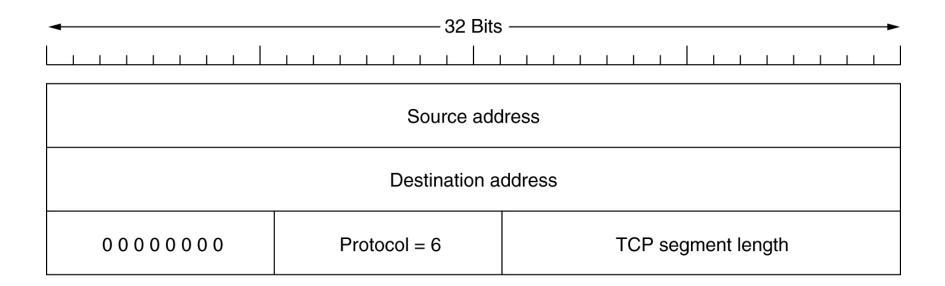

The pseudoheader included in the TCP checksum.

TCP Connection Establishment

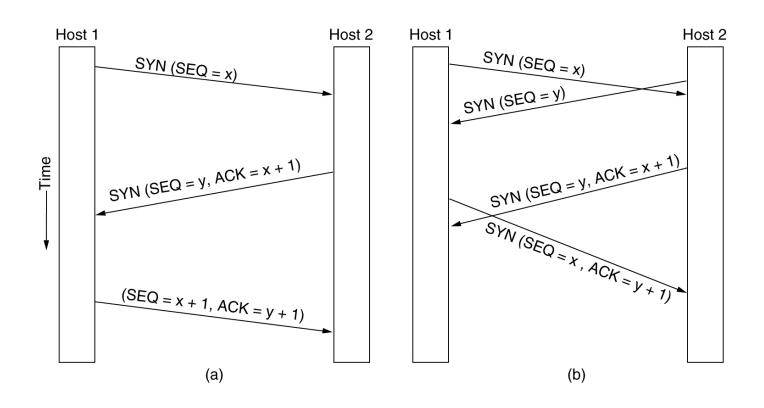

- (a) TCP connection establishment in the normal case.
- (b) Call collision.


TCP Connection Management Modeling

State	Description	
CLOSED	No connection is active or pending	
LISTEN	The server is waiting for an incoming call	
SYN RCVD	A connection request has arrived; wait for ACK	
SYN SENT	The application has started to open a connection	
ESTABLISHED	The normal data transfer state	
FIN WAIT 1	The application has said it is finished	
FIN WAIT 2	The other side has agreed to release	
TIMED WAIT	Wait for all packets to die off	
CLOSING	Both sides have tried to close simultaneously	
CLOSE WAIT	The other side has initiated a release	
LAST ACK	Wait for all packets to die off	


The states used in the TCP connection management finite state machine.

TCP Connection Management Modeling (2)

TCP connection management finite state machine. The heavy solid line is the normal path for a client. The heavy dashed line is the normal path for a server. The light lines are unusual events. Each transition is labeled by the event causing it and the action resulting from it, separated by a slash.

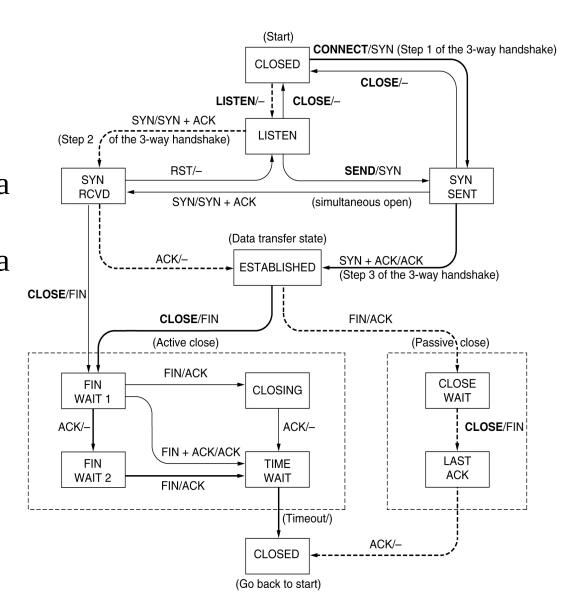


TCP Transmission Policy

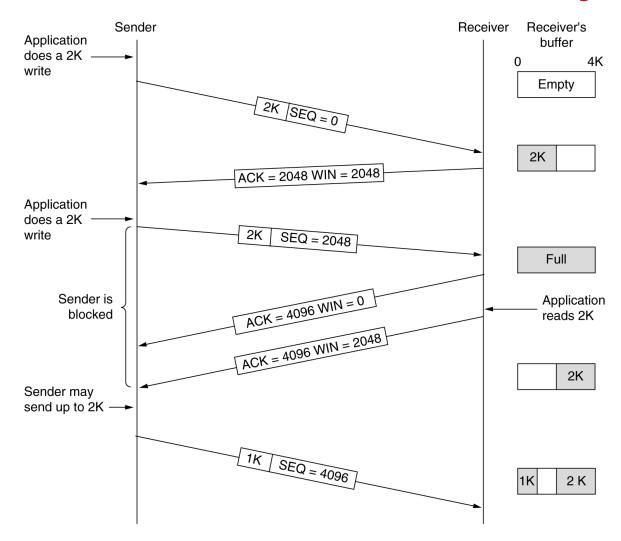


Window management in TCP.

TCP Transmission Policy (2)

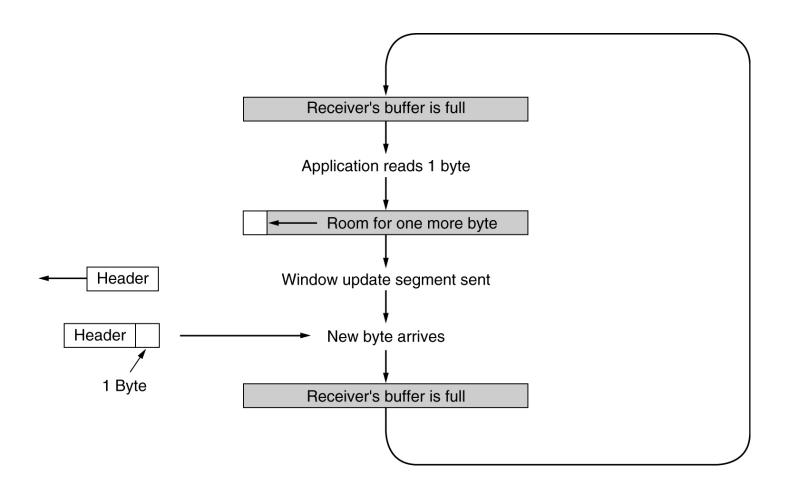


Silly window syndrome.

TCP Congestion Control

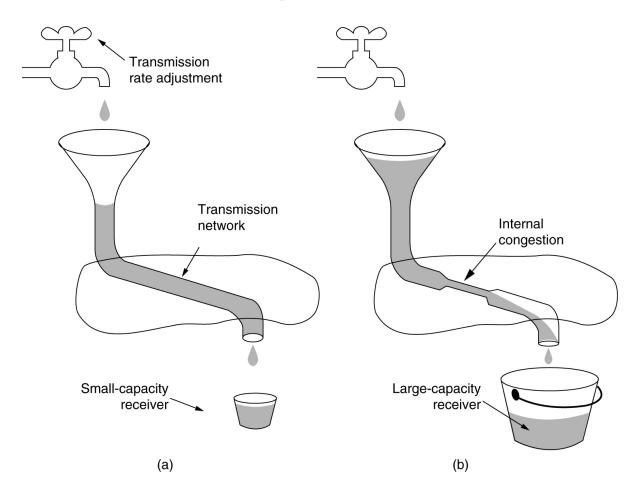


- (a) A fast network feeding a low capacity receiver.
- (b) A slow network feeding a high-capacity receiver.

TCP Congestion Control (2)

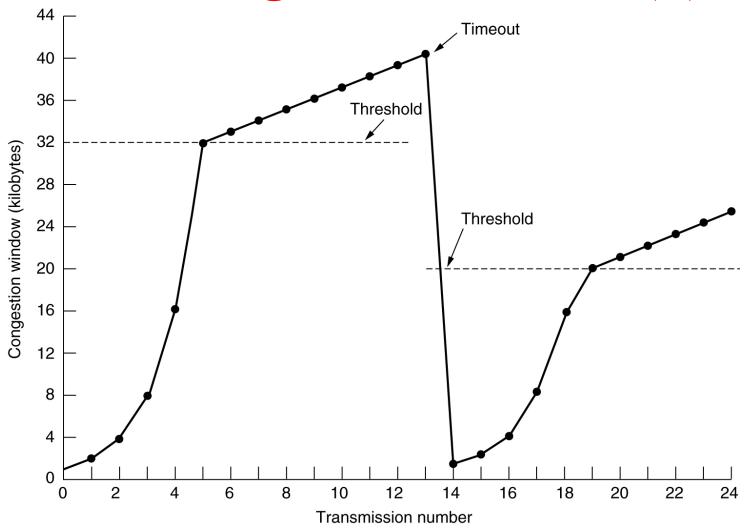


An example of the Internet congestion algorithm.

TCP Timer Management

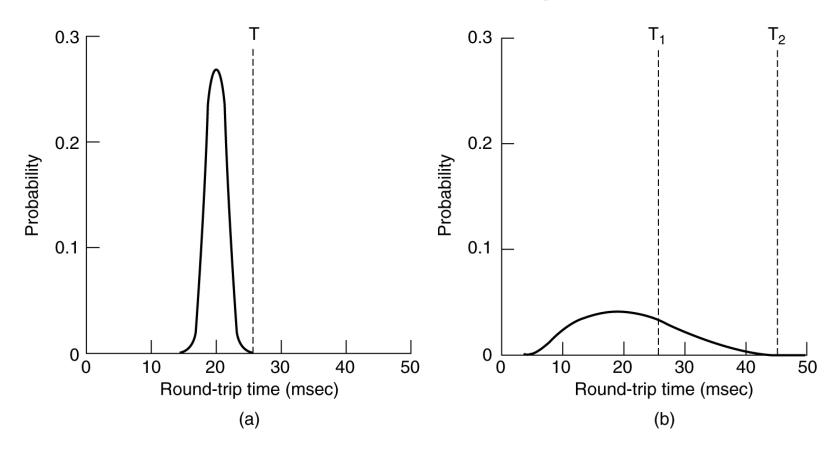


- (a) Probability density of ACK arrival times in the data link layer.
- (b) Probability density of ACK arrival times for TCP.

Wireless TCP and UDP

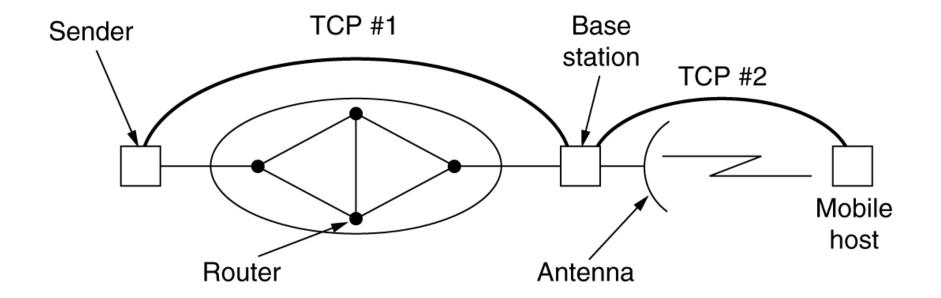

Splitting a TCP connection into two connections.

Transitional TCP

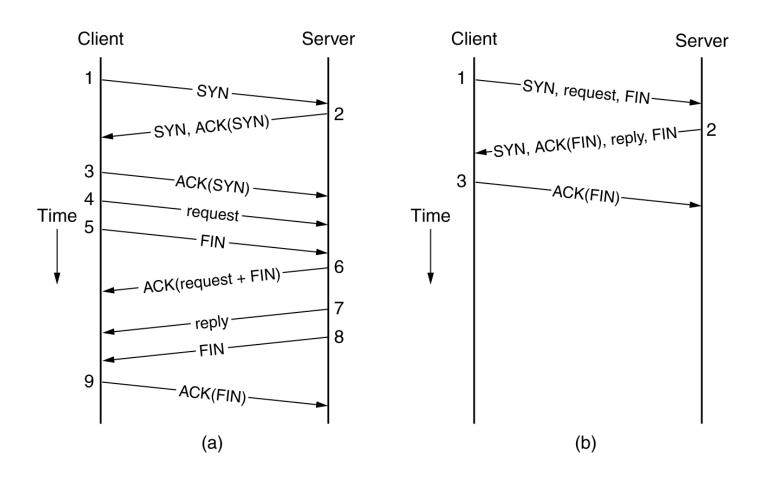


- (a) RPC using normal TPC.
- (b) RPC using T/TCP.

Performance Issues

- Performance Problems in Computer Networks
- Network Performance Measurement
- System Design for Better Performance
- Fast TPDU Processing
- Protocols for Gigabit Networks

Performance Problems in Computer Networks

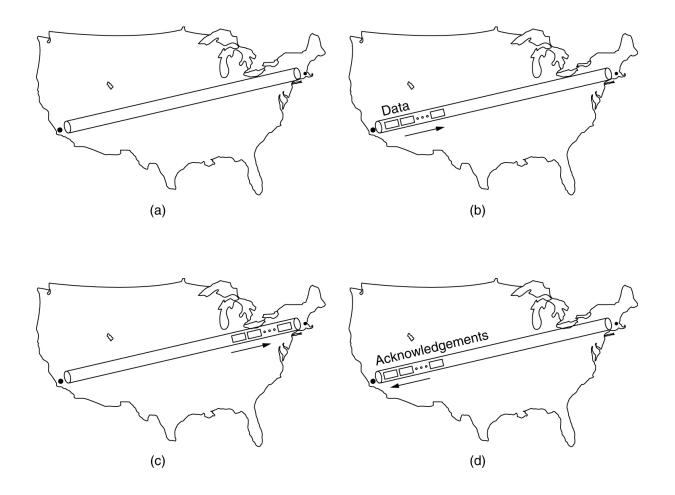

The state of transmitting one megabit from San Diego to Boston (a) At t = 0, (b) After 500 µsec, (c) After 20 msec, (d) after 40 msec.

Network Performance Measurement

The basic loop for improving network performance.


- 1. Measure relevant network parameters, performance.
- 2. Try to understand what is going on.
- 3. Change one parameter.

System Design for Better Performance

Rules:


- 1. CPU speed is more important than network speed.
- 2. Reduce packet count to reduce software overhead.
- 3. Minimize context switches.
- 4. Minimize copying.
- You can buy more bandwidth but not lower delay.
- 6. Avoiding congestion is better than recovering from it.
- 7. Avoid timeouts.

System Design for Better Performance (2)

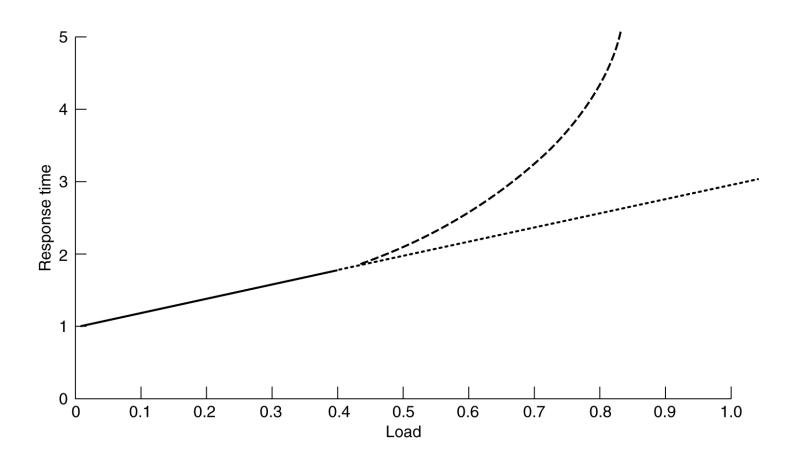


Response as a function of load.

System Design for Better Performance (3)

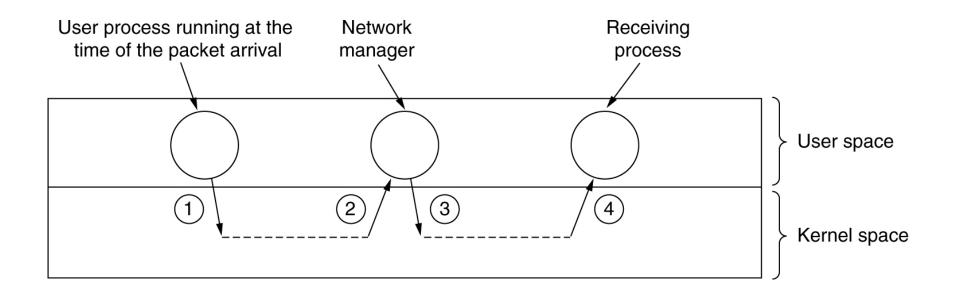

Four context switches to handle one packet with a user-space network manager.

Fast TPDU Processing

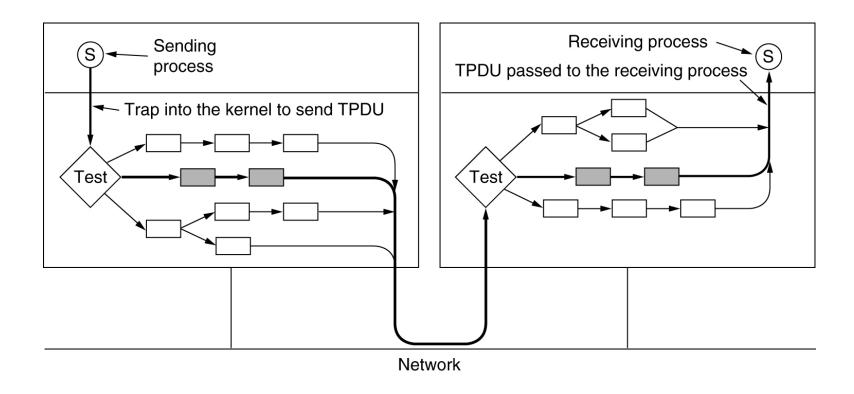

The fast path from sender to receiver is shown with a heavy line.

The processing steps on this path are shaded.


Fast TPDU Processing (2)

9	Source port	Destination port			
Sequence number					
Acknowledgement number					
Len	Unused	Window size			
(Checksum	Urgent pointer			
(a)					

VER.	IHL	TOS	Total length		
Identification			Fragment offset		
TTL		Protocol	Header checksum		
Source address					
Destination address					
(b)					


(a) TCP header. (b) IP header. In both cases, the shaded fields are taken from the prototype without change.

Fast TPDU Processing (3)

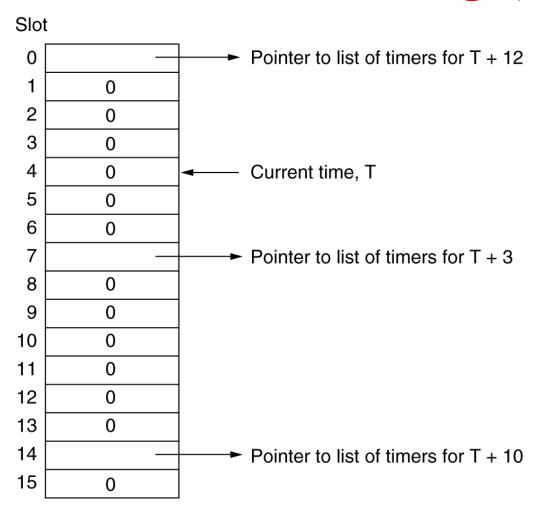

A timing wheel.

Protocols for Gigabit Networks

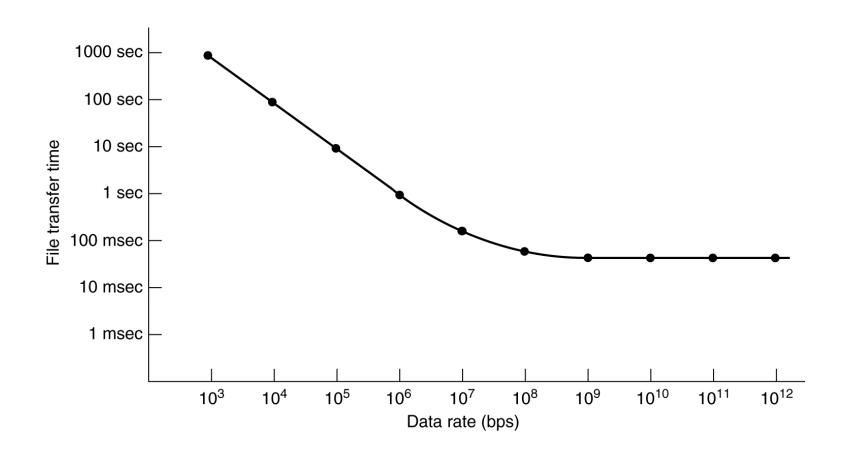

Time to transfer and acknowledge a 1-megabit file over a 4000-km line.