

Data Communications and Networking Fourth Edition

Forouzan

Chapter 12 Multiple Access

Figure 12.1 Data link layer divided into two functionality-oriented sublayers


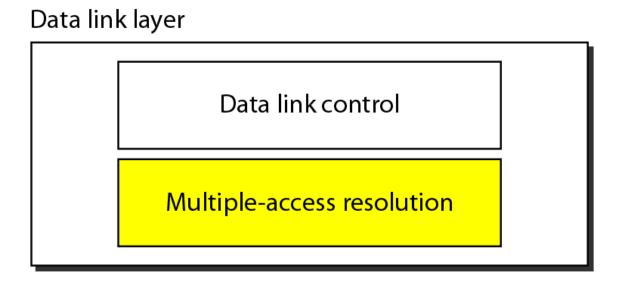


Figure 12.2 Taxonomy of multiple-access protocols discussed in this chapter

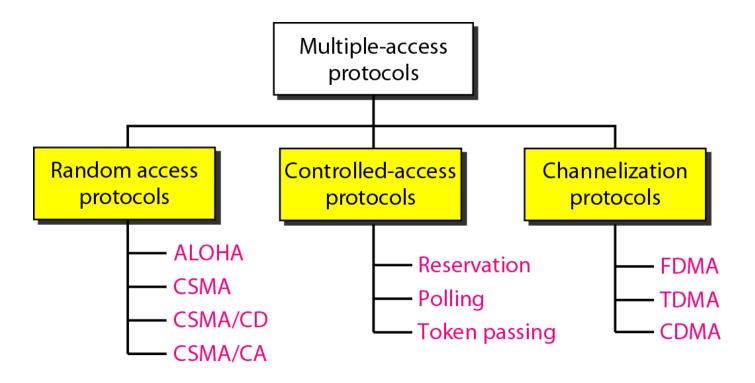

12-1 RANDOM ACCESS

In random access or contention methods, no station is superior to another station and none is assigned the control over another. No station permits, or does not permit, another station to send. At each instance, a station that has data to send uses a procedure defined by the protocol to make a decision on whether or not to send.

Topics discussed in this section:

ALOHA

Carrier Sense Multiple Access with Collision Detection
Carrier Sense Multiple Access with Collision Avoidance

Figure 12.3 Frames in a pure ALOHA network


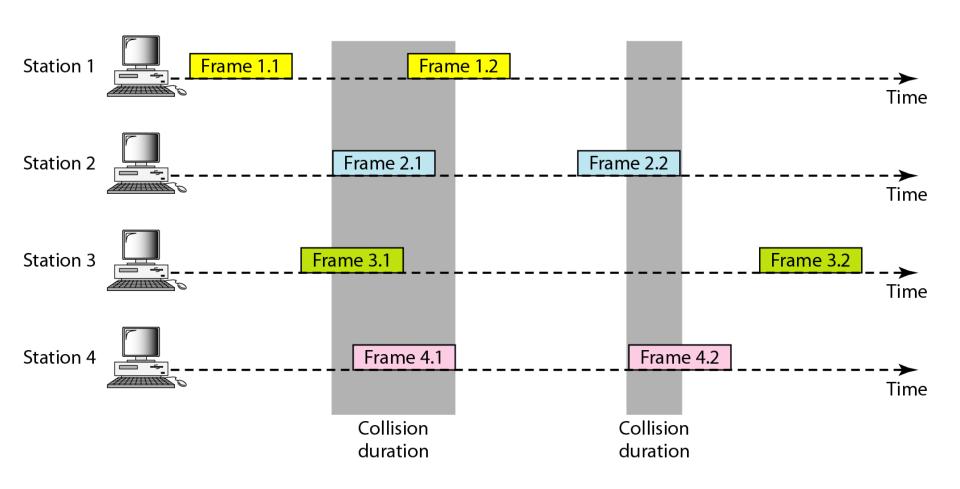


Figure 12.4 Procedure for pure ALOHA protocol

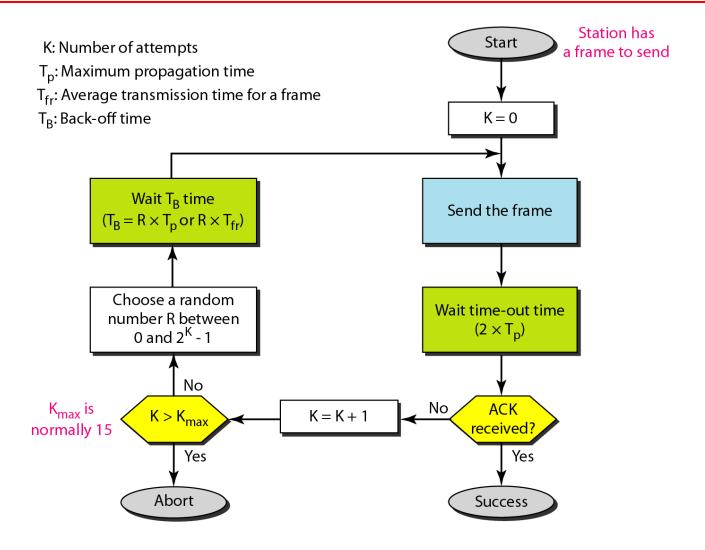

Example 12.1

The stations on a wireless ALOHA network are a maximum of 600 km apart. If we assume that signals propagate at 3×10^8 m/s, we find

$$T_p = (600 \times 10^5) / (3 \times 10^8) = 2 \text{ ms.}$$


Now we can find the value of T_B for different values of K.

a. For K = 1, the range is $\{0, 1\}$. The station needs to generate a random number with a value of 0 or 1. This means that T_B is either 0 ms (0×2) or 2 ms (1×2) , based on the outcome of the random variable.

Example 12.1 (continued)

- **b.** For K = 2, the range is $\{0, 1, 2, 3\}$. This means that T_B can be 0, 2, 4, or 6 ms, based on the outcome of the random variable.
- c. For K = 3, the range is $\{0, 1, 2, 3, 4, 5, 6, 7\}$. This means that T_B can be $0, 2, 4, \ldots, 14$ ms, based on the outcome of the random variable.
- d. We need to mention that if K > 10, it is normally set to 10.

Figure 12.5 Vulnerable time for pure ALOHA protocol

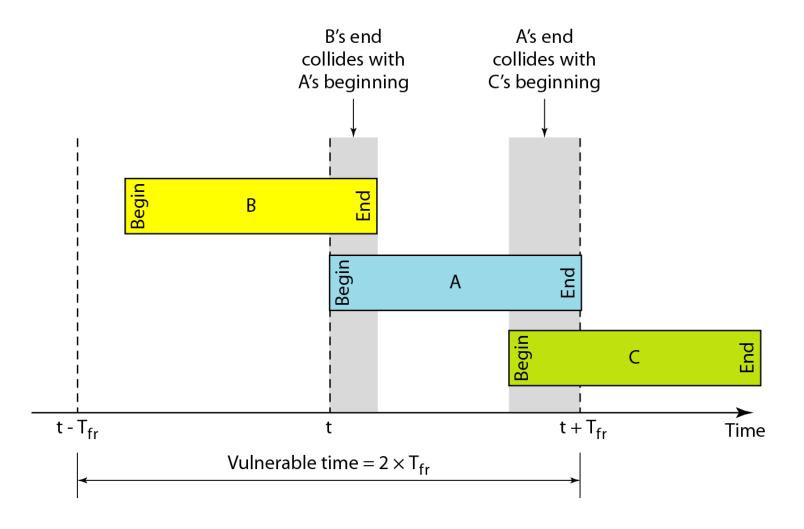

Example 12.2

A pure ALOHA network transmits 200-bit frames on a shared channel of 200 kbps. What is the requirement to make this frame collision-free?

Solution

Average frame transmission time T_{fr} is 200 bits/200 kbps or 1 ms. The vulnerable time is 2×1 ms = 2 ms. This means no station should send later than 1 ms before this station starts transmission and no station should start sending during the one 1-ms period that this station is sending.

Note

The throughput for pure ALOHA is

$$S = G \times e^{-2G}$$

The maximum throughput

 $S_{\text{max}} = 0.184 \text{ when } G = (1/2).$

Example 12.3

A pure ALOHA network transmits 200-bit frames on a shared channel of 200 kbps. What is the throughput if the system (all stations together) produces

- a. 1000 frames per second b. 500 frames per second
- c. 250 frames per second.

Solution


The frame transmission time is 200/200 kbps or 1 ms.


a. If the system creates 1000 frames per second, this is 1 frame per millisecond. The load is 1. In this case $S = G \times e^{-2 G}$ or S = 0.135 (13.5 percent). This means that the throughput is $1000 \times 0.135 = 135$ frames. Only 135 frames out of 1000 will probably survive.

Example 12.3 (continued)

- b. If the system creates 500 frames per second, this is (1/2) frame per millisecond. The load is (1/2). In this case $S = G \times e^{-2G}$ or S = 0.184 (18.4 percent). This means that the throughput is $500 \times 0.184 = 92$ and that only 92 frames out of 500 will probably survive. Note that this is the maximum throughput case, percentagewise.
- c. If the system creates 250 frames per second, this is (1/4) frame per millisecond. The load is (1/4). In this case $S = G \times e^{-2G}$ or S = 0.152 (15.2 percent). This means that the throughput is 250 \times 0.152 = 38. Only 38 frames out of 250 will probably survive.

Figure 12.6 Frames in a slotted ALOHA network

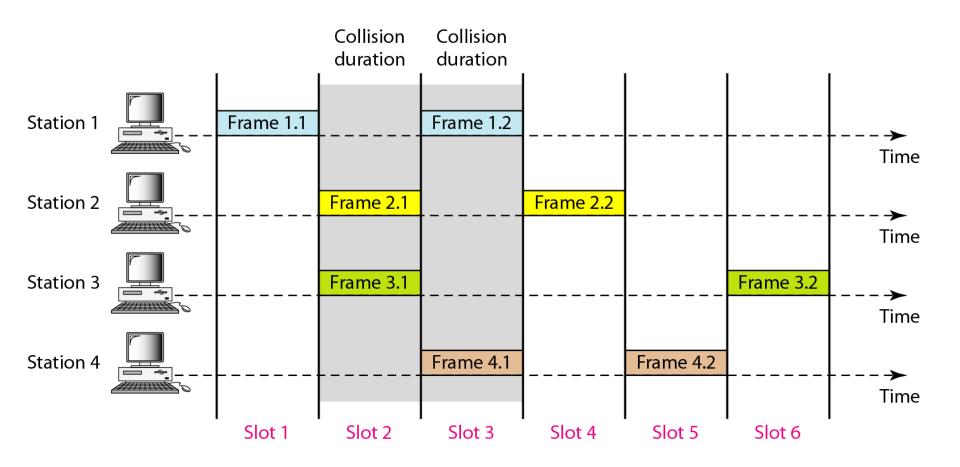




Note

The throughput for slotted ALOHA is $S = G \times e^{-G}$.

The maximum throughput $S_{max} = 0.368$ when G = 1.

Figure 12.7 Vulnerable time for slotted ALOHA protocol

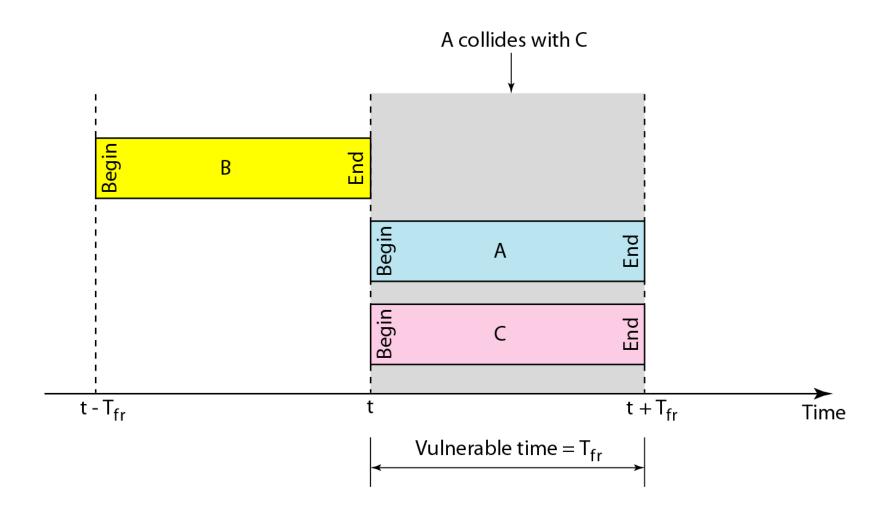

Example 12.4

A slotted ALOHA network transmits 200-bit frames on a shared channel of 200 kbps. What is the throughput if the system (all stations together) produces

- a. 1000 frames per second b. 500 frames per second
- c. 250 frames per second.

Solution

The frame transmission time is 200/200 kbps or 1 ms.

a. If the system creates 1000 frames per second, this is 1 frame per millisecond. The load is 1. In this case $S = G \times e^{-G}$ or S = 0.368 (36.8 percent). This means that the throughput is $1000 \times 0.0368 = 368$ frames. Only 386 frames out of 1000 will probably survive.

Example 12.4 (continued)

- b. If the system creates 500 frames per second, this is (1/2) frame per millisecond. The load is (1/2). In this case $S = G \times e^{-G}$ or S = 0.303 (30.3 percent). This means that the throughput is $500 \times 0.0303 = 151$. Only 151 frames out of 500 will probably survive.
- c. If the system creates 250 frames per second, this is (1/4) frame per millisecond. The load is (1/4). In this case $S = G \times e^{-G}$ or S = 0.195 (19.5 percent). This means that the throughput is $250 \times 0.195 = 49$. Only 49 frames out of 250 will probably survive.

Figure 12.8 Space/time model of the collision in CSMA

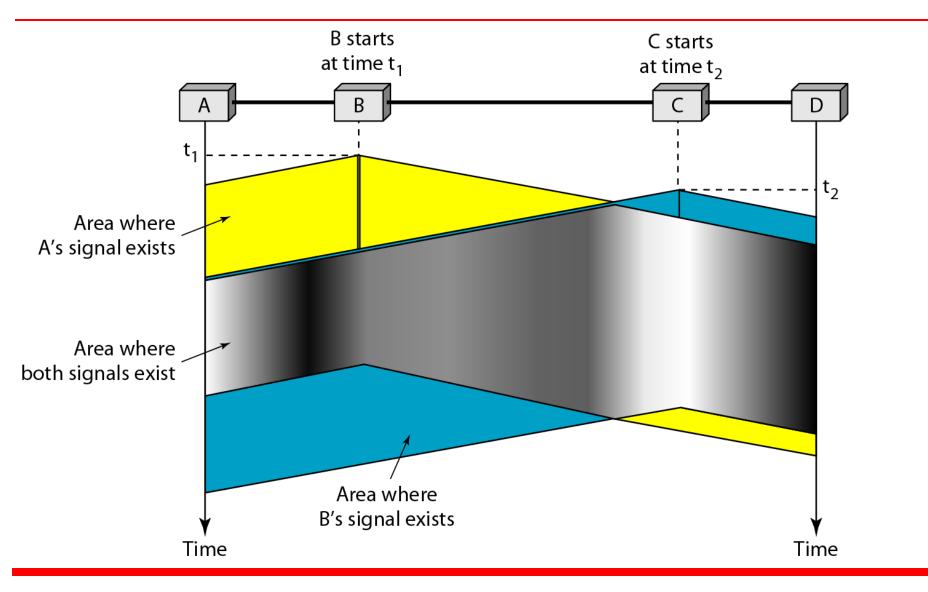


Figure 12.9 Vulnerable time in CSMA



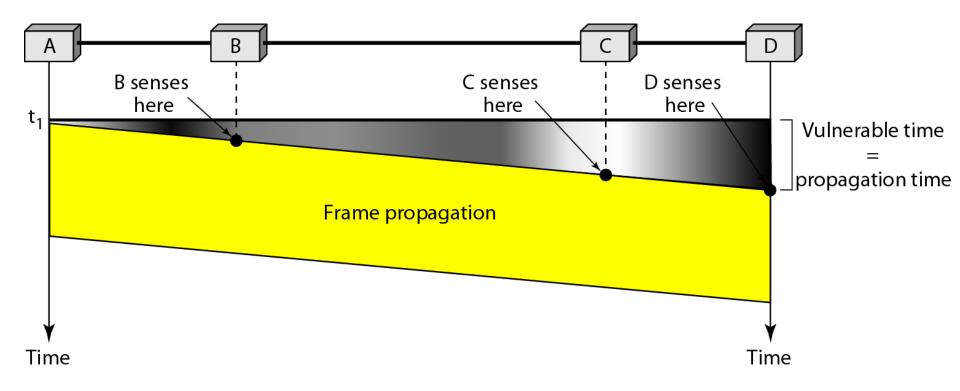



Figure 12.10 Behavior of three persistence methods

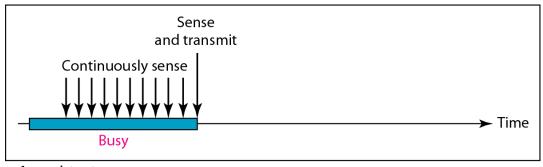

a. 1-persistent

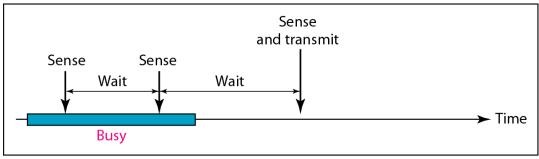



b. Nonpersistent

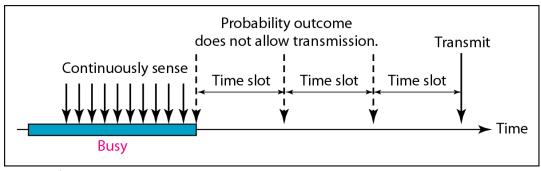

c. p-persistent


Figure 12.11 Flow diagram for three persistence methods





a. 1-persistent

b. Nonpersistent

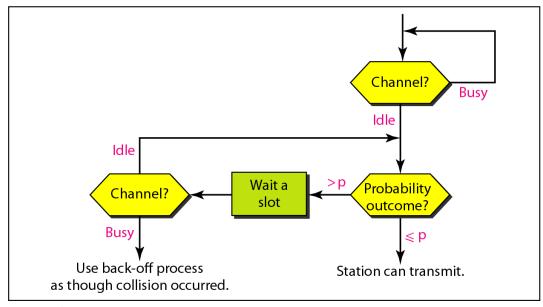

c. p-persistent

Figure 12.12 Collision of the first bit in CSMA/CD


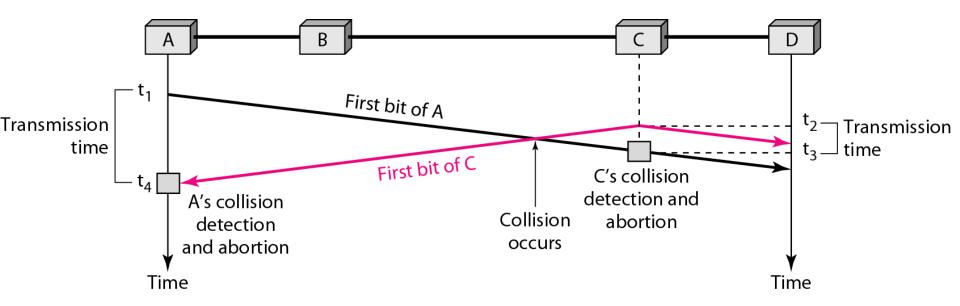


Figure 12.13 Collision and abortion in CSMA/CD

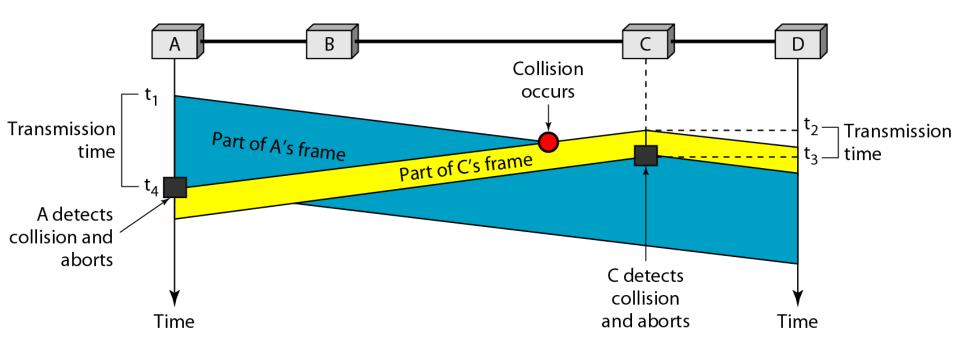

Example 12.5

A network using CSMA/CD has a bandwidth of 10 Mbps. If the maximum propagation time (including the delays in the devices and ignoring the time needed to send a jamming signal, as we see later) is 25.6 µs, what is the minimum size of the frame?

Solution

The frame transmission time is $T_{fr} = 2 \times T_p = 51.2 \ \mu s$. This means, in the worst case, a station needs to transmit for a period of 51.2 μs to detect the collision. The minimum size of the frame is 10 Mbps \times 51.2 μs = 512 bits or 64 bytes. This is actually the minimum size of the frame for Standard Ethernet.

Figure 12.14 Flow diagram for the CSMA/CD

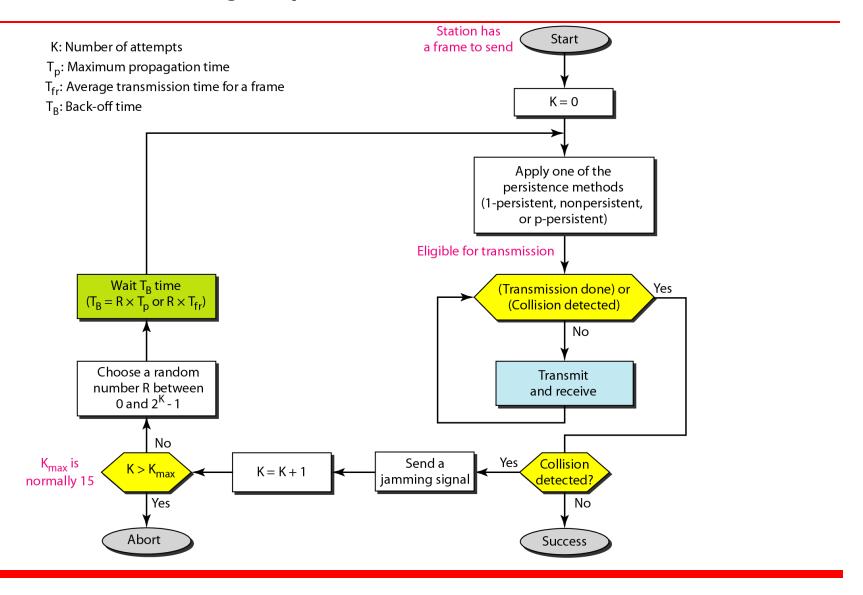


Figure 12.15 Energy level during transmission, idleness, or collision


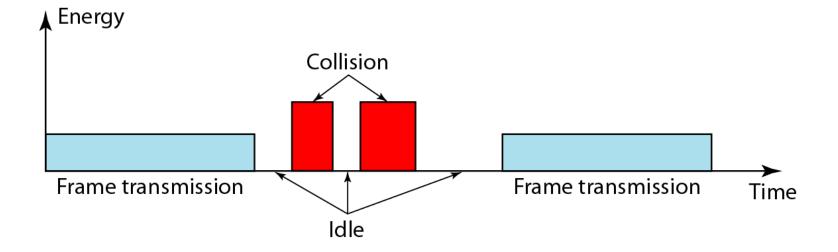


Figure 12.16 Timing in CSMA/CA



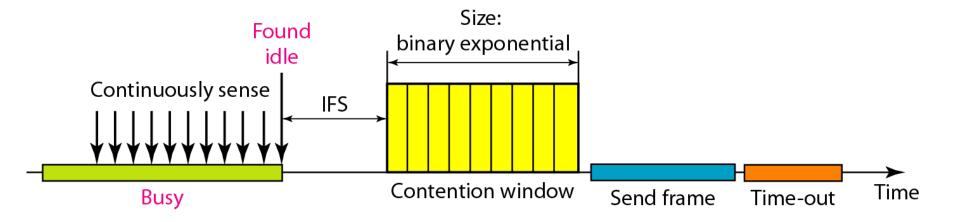


Note

In CSMA/CA, the IFS can also be used to define the priority of a station or a frame.

Note

In CSMA/CA, if the station finds the channel busy, it does not restart the timer of the contention window; it stops the timer and restarts it when the channel becomes idle.

Figure 12.17 Flow diagram for CSMA/CA

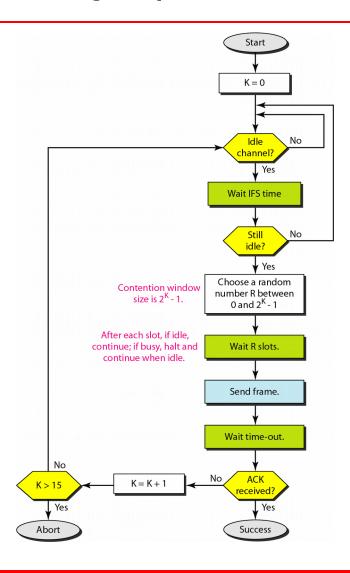

12-2 CONTROLLED ACCESS

In controlled access, the stations consult one another to find which station has the right to send. A station cannot send unless it has been authorized by other stations. We discuss three popular controlled-access methods.

Topics discussed in this section:

Reservation
Polling
Token Passing

Figure 12.18 Reservation access method

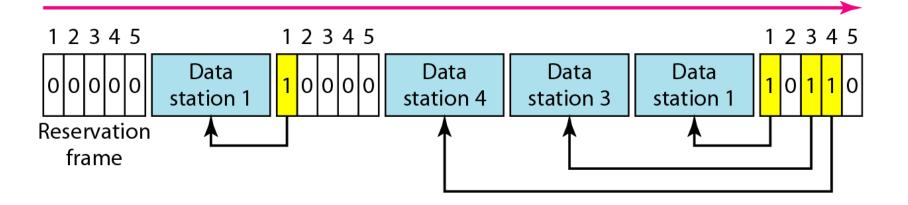


Figure 12.19 Select and poll functions in polling access method



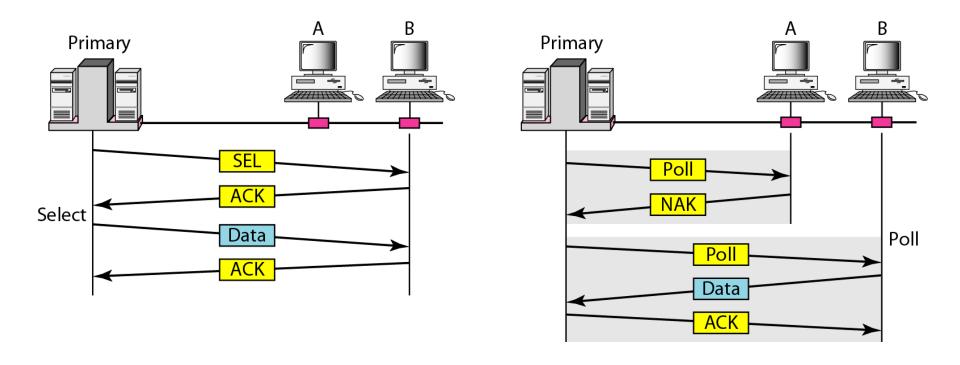



Figure 12.20 Logical ring and physical topology in token-passing access method

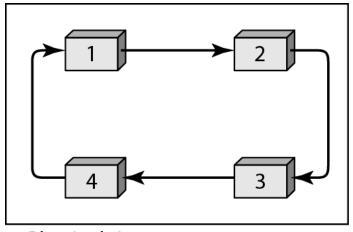


a. Physical ring

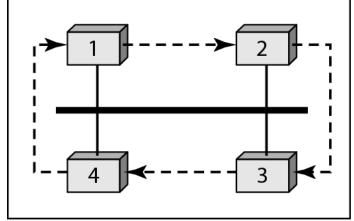

c. Bus ring

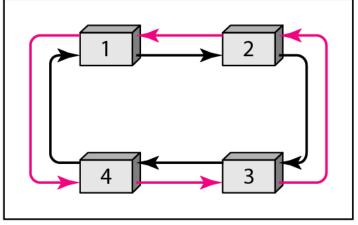

b. Dual ring

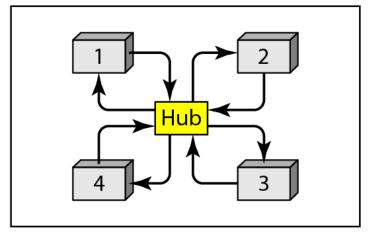

d. Star ring

12-3 CHANNELIZATION

Channelization is a multiple-access method in which the available bandwidth of a link is shared in time, frequency, or through code, between different stations. In this section, we discuss three channelization protocols.


Topics discussed in this section:

Frequency-Division Multiple Access (FDMA)
Time-Division Multiple Access (TDMA)
Code-Division Multiple Access (CDMA)



We see the application of all these methods in Chapter 16 when we discuss cellular phone systems.


Figure 12.21 Frequency-division multiple access (FDMA)

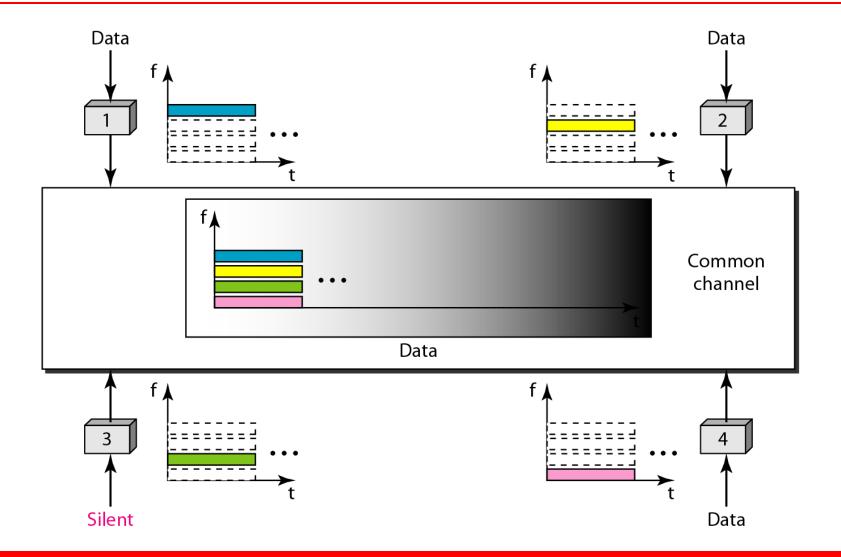



In FDMA, the available bandwidth of the common channel is divided into bands that are separated by guard bands.

Figure 12.22 *Time-division multiple access (TDMA)*

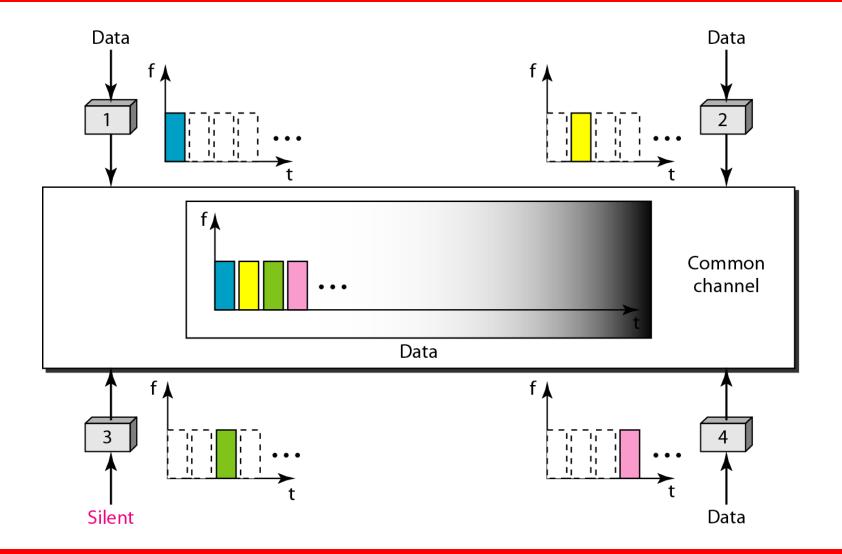



In TDMA, the bandwidth is just one channel that is timeshared between different stations.



In CDMA, one channel carries all transmissions simultaneously.

Figure 12.23 Simple idea of communication with code

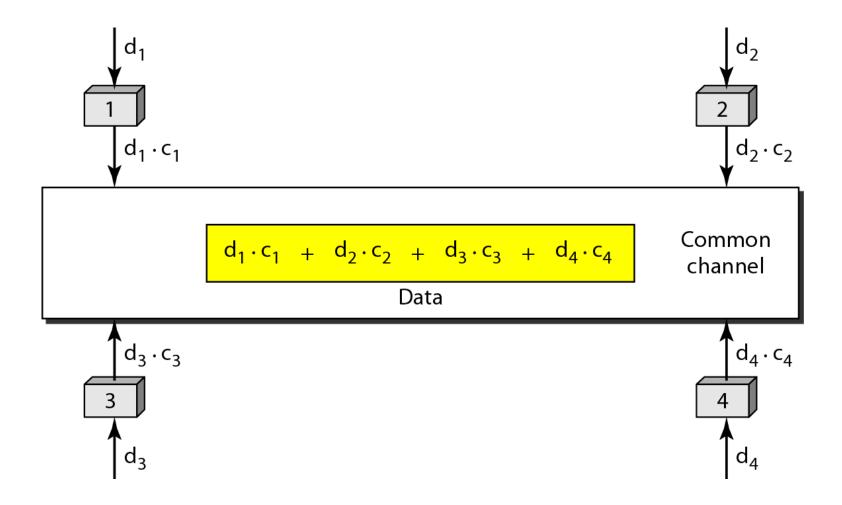


Figure 12.24 Chip sequences

Figure 12.25 Data representation in CDMA



Figure 12.26 *Sharing channel in CDMA*

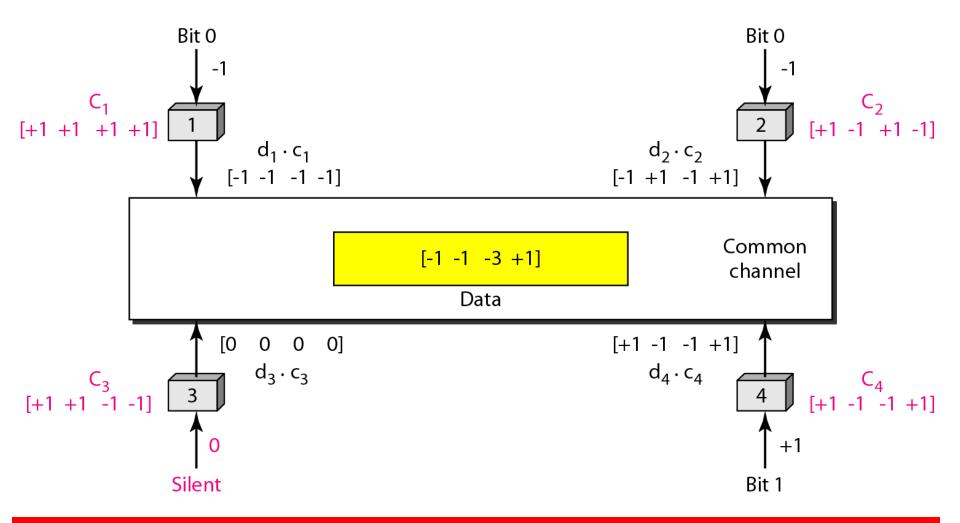


Figure 12.27 Digital signal created by four stations in CDMA

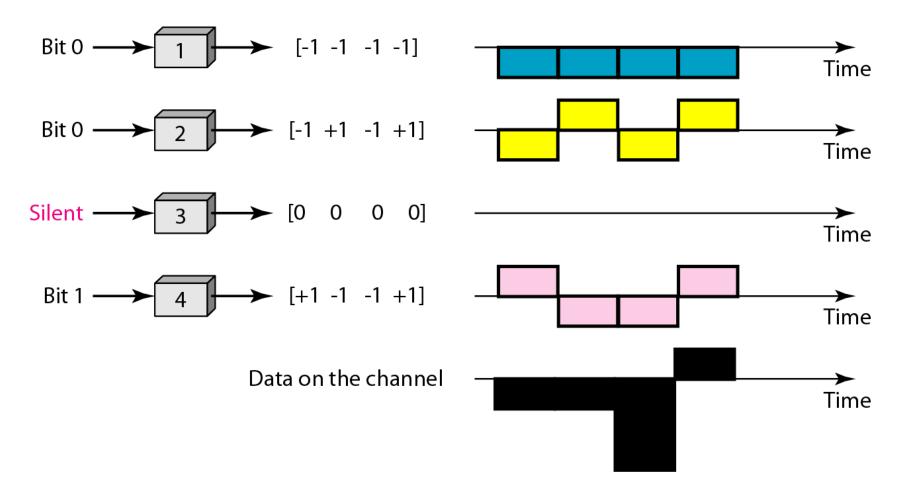


Figure 12.28 Decoding of the composite signal for one in CDMA

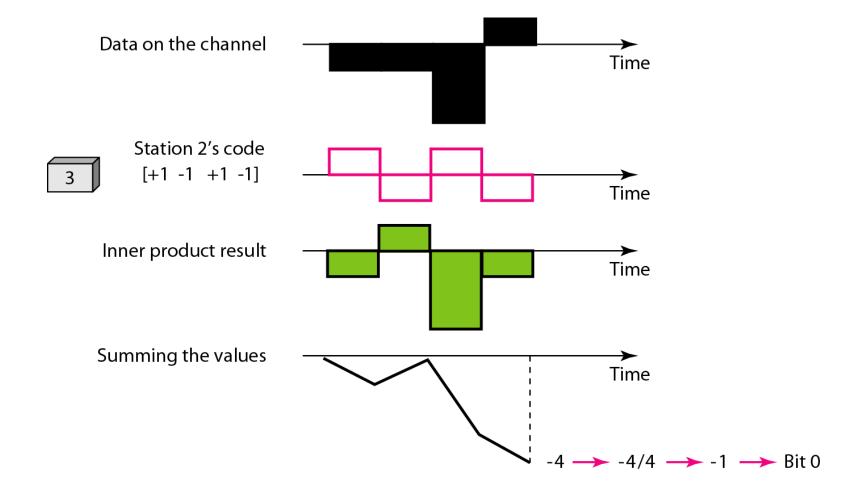


Figure 12.29 General rule and examples of creating Walsh tables

$$W_1 = \begin{bmatrix} +1 \end{bmatrix} \qquad W_{2N} = \begin{bmatrix} W_N & W_N \\ W_N & \overline{W}_N \end{bmatrix}$$

a. Two basic rules

$$W_{1} = \begin{bmatrix} +1 \\ +1 \end{bmatrix}$$

$$W_{2} = \begin{bmatrix} +1 \\ +1 \\ +1 \end{bmatrix}$$

$$W_{4} = \begin{bmatrix} +1 \\ +1 \\ +1 \end{bmatrix}$$

$$W_{4} = \begin{bmatrix} +1 \\ +1 \\ +1 \end{bmatrix}$$

$$W_{4} = \begin{bmatrix} +1 \\ +1 \\ +1 \end{bmatrix}$$

$$W_{4} = \begin{bmatrix} +1 \\ +1 \\ +1 \end{bmatrix}$$

b. Generation of W_1 , W_2 , and W_4



The number of sequences in a Walsh table needs to be N = 2^m.

Example 12.6

Find the chips for a network with **a.** Two stations **b.** Four stations

Solution

We can use the rows of W_2 and W_4 in Figure 12.29: a. For a two-station network, we have [+1 +1] and [+1 -1].

Example 12.7

What is the number of sequences if we have 90 stations in our network?

Solution

The number of sequences needs to be 2^m . We need to choose m = 7 and $N = 2^7$ or 128. We can then use 90 of the sequences as the chips.

Example 12.8

Prove that a receiving station can get the data sent by a specific sender if it multiplies the entire data on the channel by the sender's chip code and then divides it by the number of stations.

Solution

Let us prove this for the first station, using our previous four-station example. We can say that the data on the channel

$$D = (d_1 \cdot c_1 + d_2 \cdot c_2 + d_3 \cdot c_3 + d_4 \cdot c_4).$$

The receiver which wants to get the data sent by station 1 multiplies these data by c_1 .

Example 12.8 (continued)

$$\begin{split} D \cdot c_1 &= (d_1 \cdot c_1 + d_2 \cdot c_2 + d_3 \cdot c_3 + d_4 \cdot c_4) \cdot c_1 \\ &= d_1 \cdot c_1 \cdot c_1 + d_2 \cdot c_2 \cdot c_1 + d_3 \cdot c_3 \cdot c_1 + d_4 \cdot c_4 \cdot c_1 \\ &= d_1 \times N + d_2 \times 0 + d_3 \times 0 + d_4 \times 0 \\ &= d_1 \times N \end{split}$$

When we divide the result by N, we get d_1 .