




MANUAL TOOLS COMPANY

Manufacturer of Coke Oven Machinery

PRODUCT BROCHURE

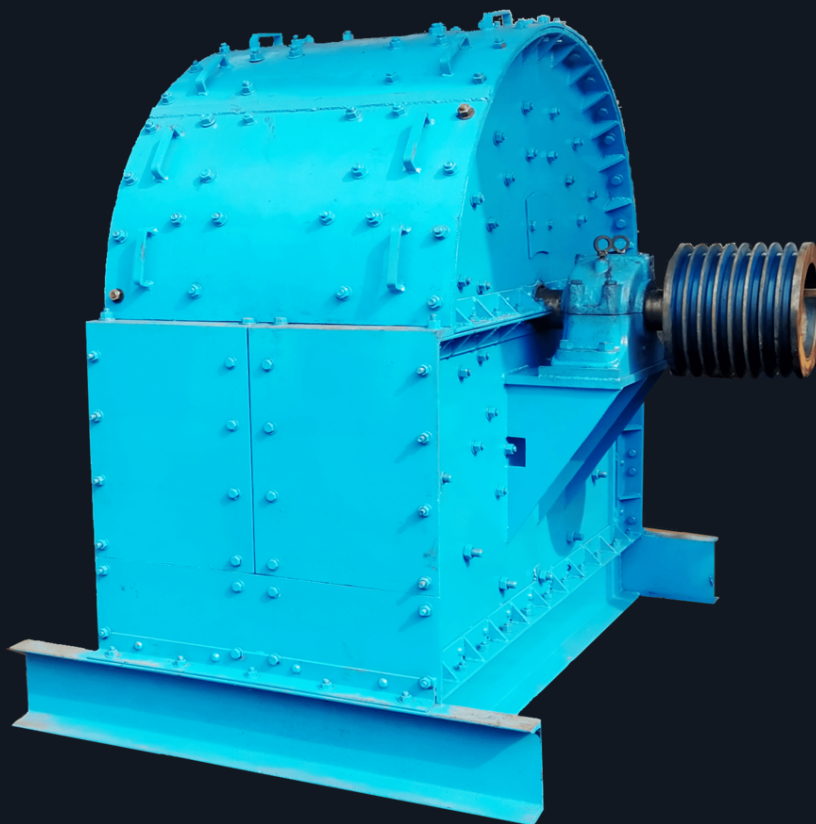

COAL CRUSHER (5 NO.)

Double Disc - High Capacity Disintegrator

20 - 25 TPH

CRUSHING CAPACITY

160 - 200 HP

MOTOR RANGE

< 2 mm

OUTPUT SIZE



Ravindra Kr. Agarwal, Proprietor

Dhanbad, Jharkhand, India | +91 9430707348


www.manualtoolsco.com

Coal Crusher (5 No.)

Double Disc - High Capacity Disintegrator

AT A GLANCE

A double disc coal crusher for high-volume plants: up to 25 TPH, with 12 manganese steel hammers that reduce coal lumps up to 150 mm to below 2 mm.

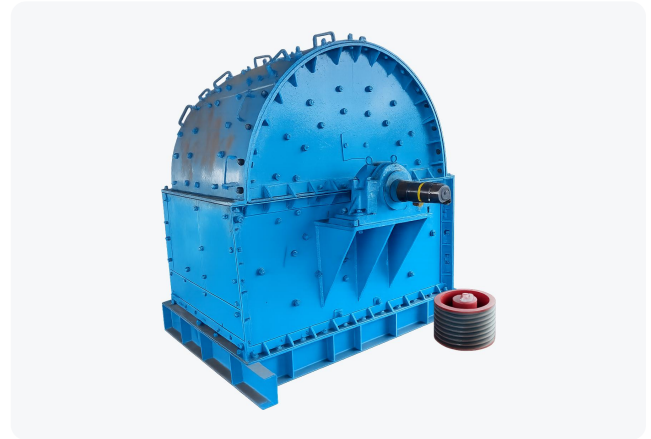

KEY SPECIFICATIONS



CAPACITY
20 - 25 TPH



MOTOR POWER
160 - 200 HP



OUTPUT SIZE
< 2 mm



MAX FEED SIZE
Up to 150mm

SPECIFICATIONS

Crushing Capacity	20 - 25 Tons / Hour
Motor	160 - 200 H.P.
Input Feed Size	Below 150 mm
Output Size	Below 2 mm
Hammers	12 Nos., Manganese Steel
Body Thickness	12 mm Fabricated Steel

DESIGN & DURABILITY

- ✓ Double disc rotor carrying 12 manganese hammers
- ✓ Individually replaceable hammers
- ✓ 12 mm fabricated steel housing
- ✓ Handles moisture up to 10 - 12%

BUYING INFORMATION

Lead time	Made to order. Ask us for the current lead time.
Warranty	1 year, as on all our machinery.
Installation	Installation supervision and commissioning available.
Custom builds	Capacity, motor power and dimensions matched to your plant and drawings.

HOW IT WORKS

01 Large Feed Intake

Accepts lumps up to 150 mm; the wide hopper spreads material across both discs.

02 Dual Rotor Impact

Two discs carrying 12 manganese hammers create a dense impact zone.

03 High Volume Discharge

Crushed coal passes the calibrated grate bars at up to 25 TPH, below 2 mm.

APPLICATIONS

Large Coke Ovens	High-capacity recovery ovens needing continuous feed.
Thermal Power	Consistent fuel for larger FBC boilers.
Briquetting Plants	High volumes of fines for fuel briquettes.

COMMON QUESTIONS

How does it differ from the Single Disc?

Two rotors and 12 hammers give 20 - 25 TPH and accept 150 mm feed, versus 8 - 10 TPH for the Single Disc.

What motor is required?

A slip-ring or squirrel cage motor between 160 HP and 200 HP.

Can it handle wet coal?

Up to 10 - 12% moisture; clean the grate bars more often for sticky coal.



Are the hammers replaceable individually?

Yes, each hammer can be replaced or reversed without dismantling the rotor.

What is the delivery timeline?

Made to order; fabrication usually takes 4 - 5 weeks depending on the production queue.

PRODUCT GALLERY

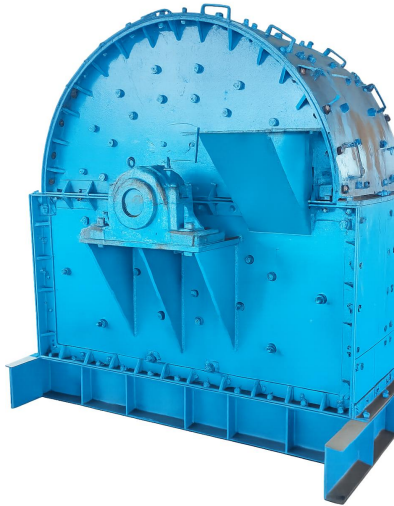

ALSO FROM MANUAL TOOLS COMPANY

Coal Crusher (5 No.)

Single Disc - Fine Coal Disintegrator

Coke Cutter Machine

Double Drive, Drum Type - Industrial Series

Ring Type Coke Cutter

Double Drive - Segmented Manganese Steel Rings

Haulage Machine

10 HP / 10 Ton - Coke Oven Extraction Series

Door Lifting Power Winch

Coke Oven Gate Lifting Equipment

Vibrator Screen Machine

Multi-Deck Series - Industrial Grading & Sorting

Pusher Machine

With Roller Stamping Arrangement

Coal Charging Car

Top Feed - Coke Oven Machinery Series

Conveyor Components

Idlers, Rollers & Pulleys - Industrial Handling Systems

REQUEST A QUOTATION

+91 9430707348

Custom sizes and capacities built to order.
www.manualtoolsco.com | Dhanbad, Jharkhand, India