




MANUAL TOOLS COMPANY

Manufacturer of Coke Oven Machinery

PRODUCT BROCHURE

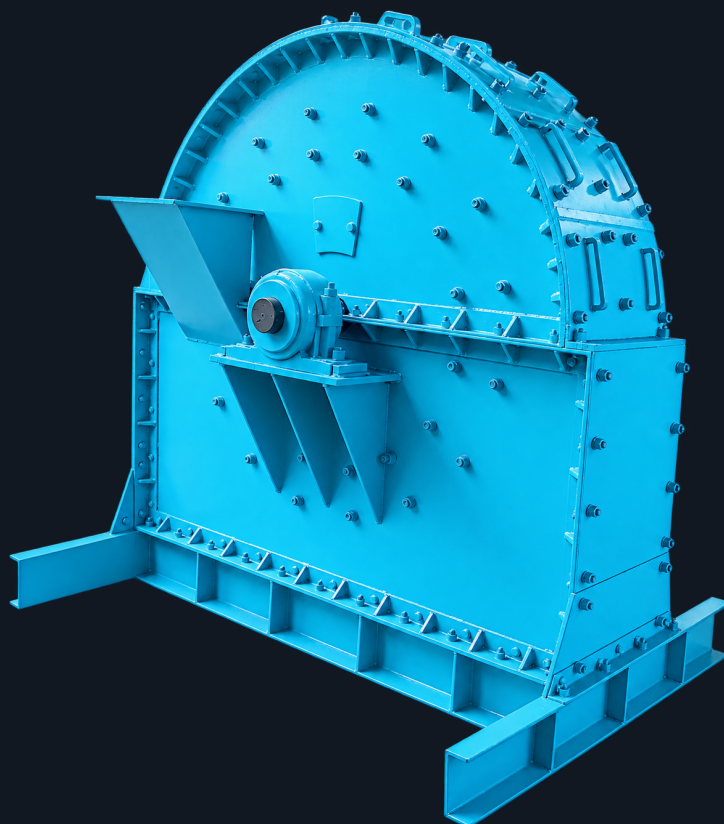

COAL CRUSHER (5 NO.)

Single Disc - Coal Disintegrator

8 - 10 TPH

CRUSHING CAPACITY

80 - 120 HP

MOTOR RANGE

< 2 mm

OUTPUT SIZE



Ravindra Kr. Agarwal, Proprietor

Dhanbad, Jharkhand, India | +91 9430707348


www.manualtoolsco.com

Coal Crusher (5 No.)

Single Disc - Coal Disintegrator

AT A GLANCE

A single disc coal crusher that pulverises coal to below 2 mm for coke oven and boiler feed. Six mild steel hammers run inside a 12 mm fabricated body, and the extra-wide disc keeps the output size uniform across the full 8 - 10 TPH range.

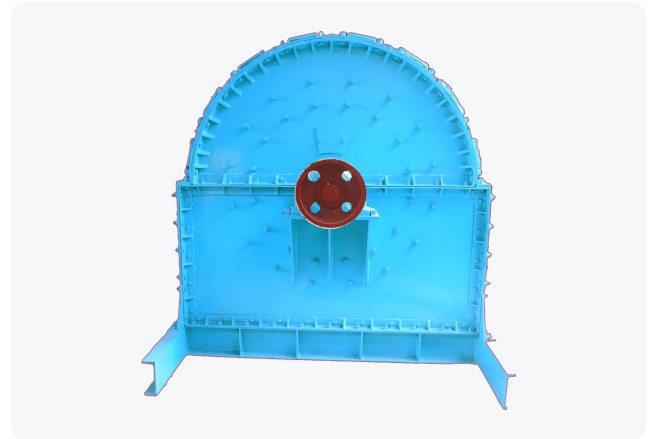

KEY SPECIFICATIONS



CAPACITY
8 - 10 TPH



MOTOR POWER
80 - 120 HP



OUTPUT SIZE
< 2 mm



MAX FEED SIZE
Up to 125mm

SPECIFICATIONS

Crushing Capacity	8 - 10 Tons / Hour
Motor	80 - 120 H.P.
Input Feed Size	Up to 125 mm
Output Size	Below 2 mm
Hammers	6 Nos., Mild Steel
Body Thickness	12 mm Fabricated Steel

DESIGN & DURABILITY

- ✓ Manganese steel side and top liner jaw plates
- ✓ Double row spherical roller bearings
- ✓ Single-side easy feeding mouth
- ✓ Extra-wide disc for uniform output
- ✓ Hammers replaceable through the side access door

BUYING INFORMATION

Lead time	Made to order. Ask us for the current lead time.
Warranty	1 year, as on all our machinery.
Installation	Installation supervision and commissioning available.
Custom builds	Capacity, motor power and dimensions matched to your plant and drawings.

HOW IT WORKS

01 Gravity Feed

Raw coal lumps up to 125 mm are delivered by conveyor and drop into the crushing chamber through the top hopper.

02 High-Speed Impact

The single disc rotates at speed. Six mild steel hammers throw the coal against the liner plates and shatter it on contact.

03 Fine Discharge

The pulverised coal passes the grate bars below 2 mm and discharges onto the outgoing conveyor, ready for the oven or boiler.

APPLICATIONS

Coke Ovens	Preparing the fine coal blend charged into stamp and top-charged batteries.
Thermal Power	Consistent sub-2 mm fuel for fluidised bed combustion boilers.
Coal Washeries	Reducing raw coal ahead of washing and blending.

COMMON QUESTIONS

What is the output size?

The single disc crusher is calibrated to produce a fine output below 2 mm.

What is the motor capacity?

An electrical motor between 80 H.P. and 120 H.P., depending on the tons per hour you need.

Are the hammers replaceable?

Yes. The six mild steel hammers are replaced through the side access door without dismantling the rotor.




What is the delivery time?

Made to order; fabrication usually takes 3 - 4 weeks depending on the production queue.

What maintenance does it need?

Check the liner plates and grease the bearings routinely. Replace the hammers when worn.

PRODUCT GALLERY

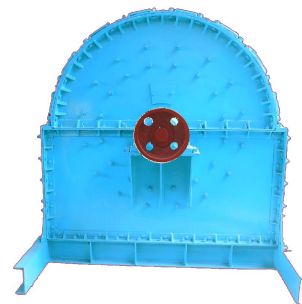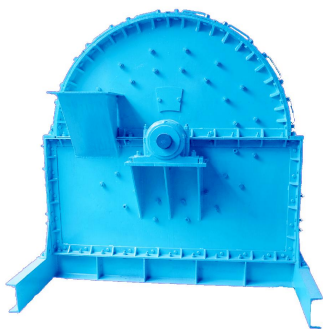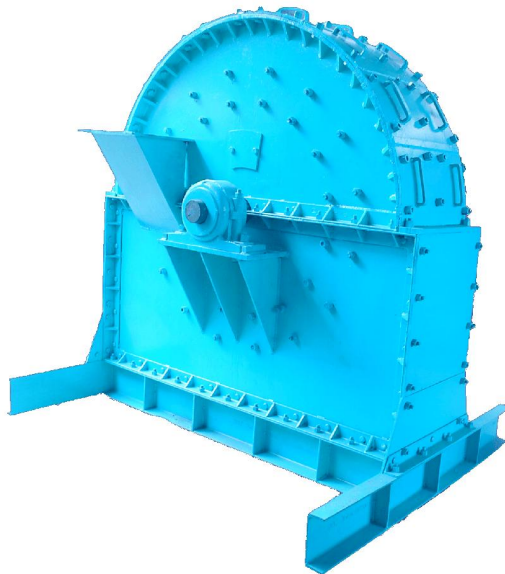

ALSO FROM MANUAL TOOLS COMPANY

Coal Crusher (5 No.)

Double Disc - High Capacity Disintegrator

Coke Cutter Machine

Double Drive, Drum Type - Industrial Series

Ring Type Coke Cutter

Double Drive - Segmented Manganese Steel Rings

Haulage Machine

10 HP / 10 Ton - Coke Oven Extraction Series

Door Lifting Power Winch

Coke Oven Gate Lifting Equipment

Vibrator Screen Machine

Multi-Deck Series - Industrial Grading & Sorting

Pusher Machine

With Roller Stamping Arrangement

Coal Charging Car

Top Feed - Coke Oven Machinery Series

Conveyor Components

Idlers, Rollers & Pulleys - Industrial Handling Systems

REQUEST A QUOTATION

+91 9430707348

Custom sizes and capacities built to order.
www.manualtoolsco.com | Dhanbad, Jharkhand, India