




MANUAL TOOLS COMPANY
Manufacturer of Coke Oven Machinery

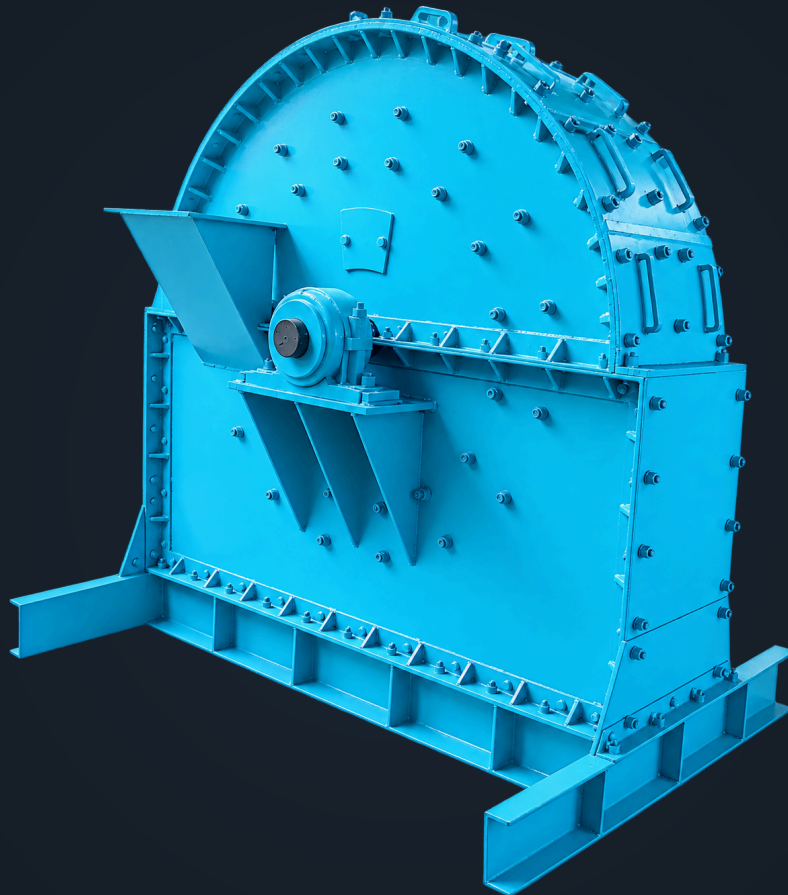

PRODUCT BROCHURE

COAL CRUSHER (5 NO.)

Single Disc – Coal Disintegrator

8 – 12 TPH

CRUSHING CAPACITY

80 – 120 HP


MOTOR RANGE

< 2 mm

OUTPUT SIZE

COAL CRUSHER (5 NO.)

A single disc coal crusher that pulverises coal to below 2 mm for coke oven and boiler feed. Six mild steel hammers run inside a 12 mm fabricated body, and the extra-wide disc keeps the output size uniform across the full 8 – 12 TPH range.

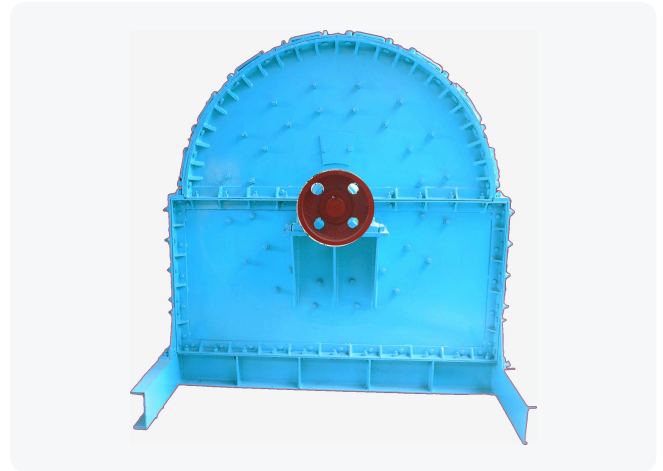

8 – 12 TPH
CAPACITY



80 – 120 HP
MOTOR POWER



< 2 mm
OUTPUT SIZE



Up to 150mm
MAX FEED SIZE

SPECIFICATIONS

Crushing Capacity	8 – 12 Tons / Hour
Motor	80 – 120 H.P.
Input Feed Size	Up to 150 mm
Output Size	Below 2 mm
Hammers	6 Nos., Mild Steel
Body Thickness	12 mm Fabricated Steel

DESIGN & DURABILITY

- Manganese steel side and top liner jaw plates
- Double row spherical roller bearings
- Single-side easy feeding mouth
- Extra-wide disc for uniform output
- Hammers replaceable through the side access door

BUYING INFORMATION

Lead time: Standard models are often in stock. Custom builds take 3–4 weeks.

Warranty: 1 year, as on all our machinery.

Installation: Installation supervision and commissioning available.

Custom builds: Capacity, motor power and dimensions can be matched to your plant and drawings.

Brochure: Download PDF

HOW IT WORKS

01 Gravity Feed

Raw coal lumps up to 150 mm are delivered by conveyor and drop into the crushing chamber through the top hopper.

02 High-Speed Impact

The single disc rotates at speed. Six mild steel hammers throw the coal against the liner plates and shatter it on contact.

03 Fine Discharge

The pulverised coal passes the grate bars below 2 mm and discharges onto the outgoing conveyor, ready for the oven or boiler.

APPLICATIONS

Coke Ovens	Preparing the fine coal blend charged into stamp and top-charged batteries.
Thermal Power	Consistent sub-2 mm fuel for fluidised bed combustion boilers.
Coal Washeries	Reducing raw coal ahead of washing and blending.

COMMON QUESTIONS

What is the output size?

The single disc crusher is calibrated to produce a fine output below 2 mm.

What is the motor capacity?

An electrical motor between 80 H.P. and 120 H.P., depending on the tons per hour you need.

Are the hammers replaceable?

Yes. The six mild steel hammers are replaced through the side access door without dismantling the rotor.

What is the delivery time?

Made to order; fabrication usually takes 3 – 4 weeks depending on the production queue.

What maintenance does it need?

Check the liner plates and grease the bearings routinely. Replace the hammers when worn.

SPARE AND WEAR PARTS



Crusher hammers

Fits: 6 per machine



Manganese Steel Top Liner Jaw Plate

Fits: Single disc, 5 No.




Disc rotor with shaft

Fits: Single disc, 5 No.

Also made to order: side liner plates, bearing housings, V-belt drives and hopper sections. Tell us the machine and we will quote the part.

PRODUCT GALLERY

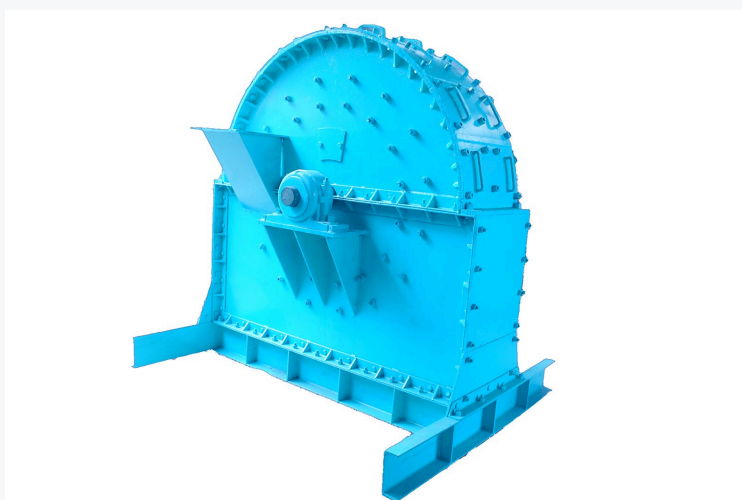

ALSO FROM MANUAL TOOLS COMPANY

Coal Crusher (5 No.)

Double Disc – High Capacity Disintegrator

Ring Type Coke Cutter

Double Drive – Segmented Manganese Steel Rings

Door Lifting Power Winch

Coke Oven Gate Lifting Equipment

Pusher Machine

With Roller Stamping Arrangement

Conveyor Components

Idlers, Rollers & Pulleys – Industrial Handling Systems

Coke Cutter Machine

Double Drive, Drum Type – Industrial Series

Haulage Machine

10 HP / 10 Ton – Coke Oven Extraction Series

Vibrator Screen Machine

Multi-Deck Series – Industrial Grading & Sorting

Coal Charging Car

Top Feed – Coke Oven Machinery Series

REQUEST A QUOTATION

+91 9430707348

Custom sizes and capacities built to order.

manualtoolsco.dhn@gmail.com

www.manualtoolsco.com | Dhanbad, Jharkhand, India