




MANUAL TOOLS COMPANY
Manufacturer of Coke Oven Machinery

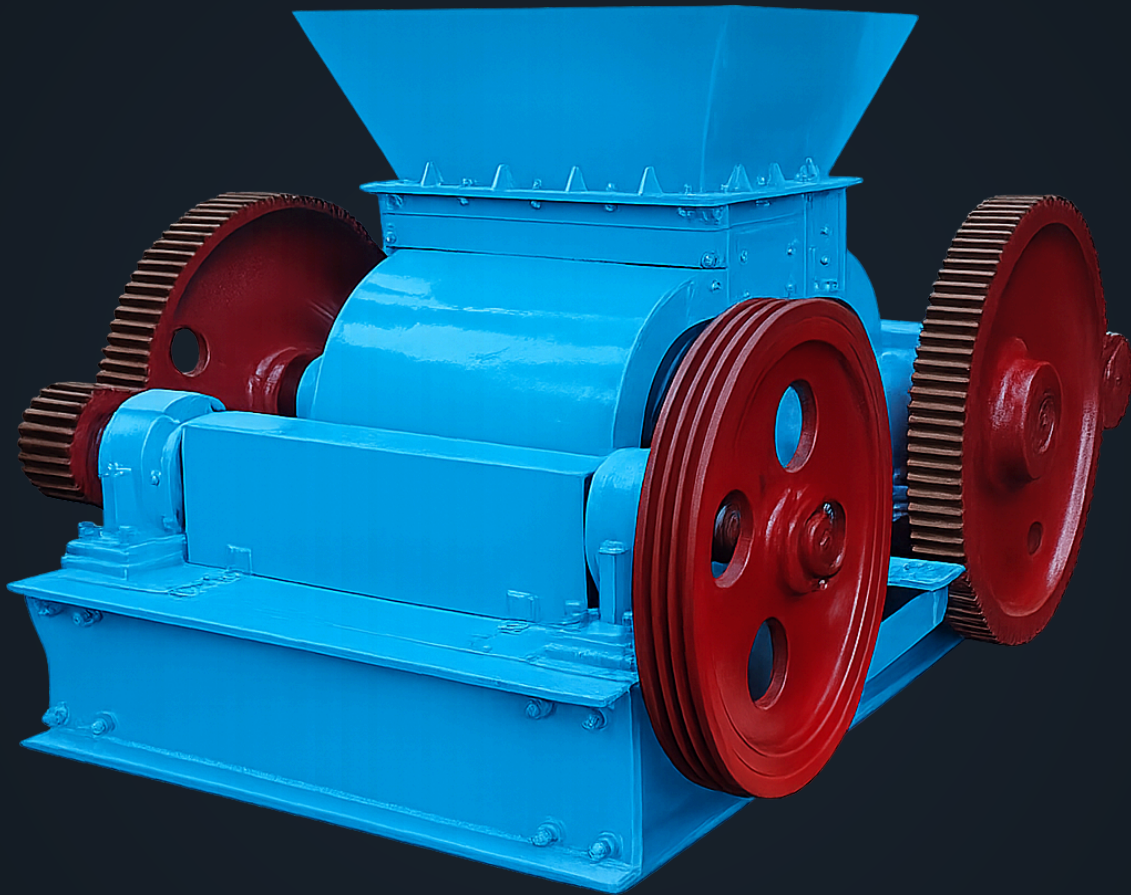

PRODUCT BROCHURE

RING TYPE COKE CUTTER

Double Drive – Segmented Manganese Steel Rings

15 – 20 TPH

CUTTING CAPACITY

25 HP × 2


DOUBLE DRIVE

40 – 60 mm

OUTPUT SIZE

RING TYPE COKE CUTTER

A double drive coke cutter whose shafts carry separate toothed rings of high manganese steel instead of one lined drum. Two 25 HP motors, 15 – 20 TPH, adjustable 40 – 60 mm output.

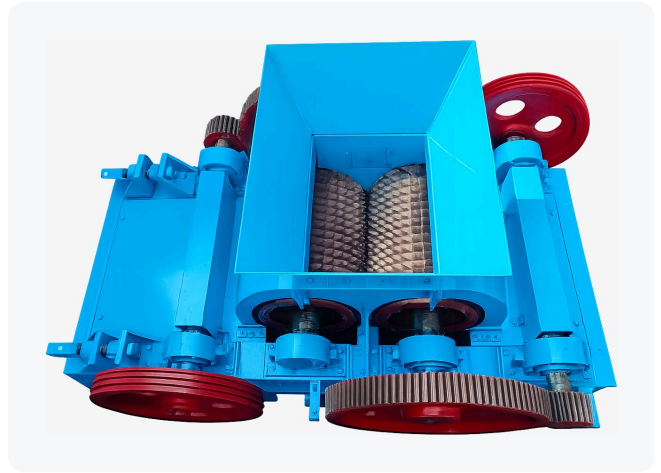

Toothed Rings

MECHANISM



25 HP x 2 (Dual)

MOTOR POWER



40 – 60 mm

OUTPUT SIZE



15 – 20 TPH

CAPACITY

SPECIFICATIONS

Cutting Capacity	15 – 20 Tons / Hour
Motor	25 H.P. + 25 H.P. (Total 50 HP)
Input Feed Size	Below 200 mm
Output Size	40 – 60 mm (Adjustable)
Cutting Element	Segmented Toothed Rings
Ring Material	High Manganese Steel

DESIGN & DURABILITY

- Segmented toothed rings, keyed individually
- High manganese steel that work-hardens in use
- Individually replaceable rings
- Double drive: equal torque, less jamming

BUYING INFORMATION

Lead time: Made to order. Ask us for the current lead time.

Warranty: 1 year, as on all our machinery.

Installation: Installation supervision and commissioning available.

Custom builds: Capacity, motor power and dimensions can be matched to your plant and drawings.

Brochure: Download PDF

HOW IT WORKS

01 Feed Intake

Large coke lumps fall into the cutting chamber. The robust housing is designed to withstand impact from heavy material.

02 Ring Shearing

As the shafts rotate, the toothed rings engage the coke. The segmented design concentrates force for cleaner cuts with less dust.

03 Sized Output

Sized coke (40 – 60 mm) passes through the gap. Oversized pieces remain until cut, for consistent furnace-grade coke.

APPLICATIONS

Steel Plants	Metallurgical coke for blast furnaces, where air flow permeability is key.
Cupola Furnaces	Consistent coke sizes for foundries: stable temperatures and melting rates.
Ferro Alloys	Specific carbon sizing for reduction processes.

COMMON QUESTIONS

What is the benefit of the Ring Type design?

Rings are keyed to the shaft individually, so a damaged section is replaced on its own instead of relining the whole drum. The cutting is also very aggressive on hard coke.

Why are there two motors (Double Drive)?

Equal torque on both ends of the cutting shaft prevents jamming on large or hard lumps and extends gear life.

Can I adjust the output size?

Yes. The gap between the ring shafts is adjustable from 40 mm to 60 mm.

How durable are the rings?

They are cast from High Manganese Steel, which work-hardens in use and withstands abrasive metallurgical coke.

What capacity does this machine handle?

This model is designed for 15 to 20 Tons Per Hour (TPH).

PRODUCT GALLERY



ALSO FROM MANUAL TOOLS COMPANY

Coal Crusher (5 No.)

Single Disc – Coal Disintegrator

Coke Cutter Machine

Double Drive, Drum Type – Industrial Series

Door Lifting Power Winch

Coke Oven Gate Lifting Equipment

Pusher Machine

With Roller Stamping Arrangement

Conveyor Components

Idlers, Rollers & Pulleys – Industrial Handling Systems

Coal Crusher (5 No.)

Double Disc – High Capacity Disintegrator

Haulage Machine

10 HP / 10 Ton – Coke Oven Extraction Series

Vibrator Screen Machine

Multi-Deck Series – Industrial Grading & Sorting

Coal Charging Car

Top Feed – Coke Oven Machinery Series

REQUEST A QUOTATION

+91 9430707348

Custom sizes and capacities built to order.

manualtoolsco.dhn@gmail.com

www.manualtoolsco.com | Dhanbad, Jharkhand, India