Smart Traffic Management System

[1]Ninad Lanke
B.E IT (pursuing)
202, Shrikrishna soc, Sahakarnagar no-2,
Pune-411009, India

[2]Sheetal Koul
M.E (Computer Networks)-pursuing
Department of Information Technology,
SKNCOE, Pune-411041

ABSTRACT
Traffic congestion is a major problem in many cities of India along with other countries. Failure of signals, poor law enforcement and bad traffic management has lead to traffic congestion. One of the major problems with Indian cities is that the existing infrastructure cannot be expanded more, and thus the only option available is better management of the traffic. Traffic congestion has a negative impact on economy, the environment and the overall quality of life. Hence it is high time to effectively manage the traffic congestion problem. There are various methods available for traffic management such as video data analysis, infrared sensors, inductive loop detection, wireless sensor network, etc. All these methods are effective methods of smart traffic management. But the problem with these systems is that the installation time, the cost incurred for the installation and maintenance of the system is very high. Hence a new technology called Radio Frequency Identification (RFID) is introduced which can be coupled with the existing signaling system that can act as a key to smart traffic management in real time. This new technology which will require less time for installation with lesser costs as compared to other methods of traffic congestion management. Use of this new technology will lead to reduced traffic congestion. Bottlenecks will be detected early and hence early preventive measures can be

taken thus saving time and money of the driver.

1. INTRODUCTION

Traffic congestion on road networks is nothing but slower speeds, increased trip time and increased queuing of the vehicles. When the number of vehicles exceeds the capacity of the road, traffic congestion occurs. In the metropolitan cities of India traffic congestion is a major problem. Traffic congestion is caused when the demand exceeds the available road capacity. This is known as saturation [1]. Individual incidents such as accidents or sudden braking of a car in a smooth flow of heavy traffic have rippling effects and cause traffic jams [2]. There are even severe security problems in traffic system due to anti social elements which also leads to stagnation of traffic at one place. In country like India, there is an annual loss of Rs 60,000 crores due to congestion (including fuel wastage). Congestion in India has also led to slow speeds of freight vehicles, and increased waiting time at checkpoints and toll plazas [3]. The average speed of vehicles on key corridors like Mumbai-Chennai, Delhi-Chennai is less than 20kmph, while it is mere 21.35kmph on Delhi-Mumbai stretch. As per the transport corporation of India and IIM, 9.08% and that of vehicles at 10.76%, but that of road is only by 4.01%. This has resulted in reduced road space in accordance with the number of total vehicles [3].The average fuel mileage in India is only 3.96kmpl. The major reason for this is traffic congestion [3].India is the 2^{nd} most populated country after China in Asia, thus with increase in population, the number of vehicles also increase [4].The economic growth has certainly has had an impact on urban traffic. As the income rises, more and more people begin to go for cars rather than two wheelers [5].Hence there is a need to manage traffic in a smart way as the management of traffic with the conventional way such as the signaling system is not having a major effect in curbing congestion of vehicular traffic.

2. EXISTING METHODOLOGY

2.1 Inductive Loop Detection

Inductive loop detection works on the principle that one or more turns of insulated wire are placed in a shallow cutout in the roadway, a lead in wire runs from roadside pull box to the controller and to the electronic unit located in the controller cabinet. When a vehicle passes over the loop or stops, the induction of the wire is changed. Due to change in induction, there is change in the frequency. This change in the frequency causes the electronic unit to send a signal to the controller, indicating presence of the vehicle [6].Inductive loop detection is useful in knowing the vehicle presence, passage, occupancy and even the number of vehicles passing through a particular area [6,7]. But there are few problems with this system. These include poor reliability due to improper connections made in the pull boxes and due to application of sealant over the cutout of the road. If this system is implemented in poor pavement or where digging of the roads is frequent then the problem of reliability is aggravated [4,5,8].

2.2 Video Analysis

Video analysis consists of a smart camera placed which consists of sensors, a processing unit and a communication unit [9]. The traffic is continuously monitored using a smart camera. The video captured is then compressed so as to reduce the transmission bandwidth. The video analysis abstracts scene description from the raw video data. This description is then used to compute traffic statistics. This statistic includes frequency of the vehicles, average speed of the vehicles as well as the lane occupancy [9,10].The problems associated with video analysis are – (a) the overall cost of the system is quite high (b) the system gets affected in case of heavy fog or rains (c) night time surveillance requires proper street lighting [6,8].

20

2.3 Infrared Sensors

Infrared sensors are used to detect energy emitted from vehicles, road surfaces and other objects. The energy captured by these infrared sensors is focused onto an infrared sensitive material using an optical system which then converts the energy into the electric signals. These signals are mounted overhead to view the traffic. Infrared sensors are used for signal control, detection of pedestrians in crosswalks and transmission of traffic information [11]. The basic disadvantages of infrared sensors are that the operation of the system may be affected due to fog; also installation and maintenance of the system is tedious [5,8].

3. SMART TRAFFIC MANAGEMENT SYSTEM

3.1 Background

A Radio Frequency Identification (RFID) system consists of RFID controller and RFID tag.

1) RFID Controller:

The RFID controller consists of RFID interrogator. This interrogator is used for the communication with the RFID tag. The RFID controller then gets the signals/data received by the interrogator. Messaging interference is used to send commands and data messages from the controller components. Controller core is present inside the RFID controller. The controller core listens to the interrogators and depending upon the configuration; the controller core can perform read/write operations upon the RFID tag or can do both listening and performing operations [5].The RFID controller can have serial interface through which external GSM/GPRS devices can be interfaced with it to make a dual radio device.

2) RFID Tag:

RFID tags are wireless devices which make use of radio frequency electromagnetic fields to transfer data, which is used for identifying and tracking of the objects. RFID tags are of two types: Active and Passive [12]. Active RFID has a battery installed, which the passive RFID doesn't have.

Passive RFID has to depend on external source for working. Tags information can be stored in a non-volatile memory. Tag consists of a Radio Frequency transmitter and receiver. Each tag can be assigned a unique serial number [13].

3.2 Relevant Algorithm

Input:

Max_red denotes the maximum time for which the signal can be red.

Max_green denotes the maximum time for which the signal can be green.

Min_freq_count denotes the minimum frequency of vehicles passing per second stored statically in controllers.

Act_freq_count denotes the actual frequency of the vehicles

Timer denotes the actual timer count.

Algorithm:

1. When the signal turn green.
While (Timer<Max_green and Timer is not 0) do
  If (Act_freq_count>Min_freq_count)
    Keep the signal green.
    Decrement timer count by 1.
Else if (Act_freq_count<=Min_freq_count)
    Goto 2.
End

2. Make the signal red. Turn the adjacent signal green. Goto 1.

Desired Output: Effective congestion management

3.3 System Overview

Each vehicle can be installed with a RFID tag. This RFID tag would store all the information regarding the vehicle such as the vehicle number, etc. RFID tags can be used in identifying each vehicle uniquely and also help the driver to receive some traffic messages. The existing signaling system can be coupled with the RFID controller. As described in figure 1, each signal can have the information regarding every vehicle that passes by it. Thus when a vehicle passes by a signal, the signal can automatically keep the count of the vehicles passing by it, and help in detection of traffic congestion. Each signal should be stored with a threshold value for which it should be red and green. Now depending upon the frequency

of the vehicles passing by the signal per second, the timer can be dynamically controlled. Each controller of the signal should be stored with a value of minimum frequency of the vehicles passing by the signal. As soon as this minimum frequency is reached, the controller should send a command to the signal to turn red. Thus the signal is controlled dynamically. For example, suppose for a signal, maximum time for which a signal can be red is set to be 30 seconds and maximum time for which the signal can be green is set as 20 seconds. The controller is stored with the value of minimum frequency of vehicles passing by it per second as 5. Now suppose the signal turns green, the timer starts with a maximum value of 20. Initially the frequency of the vehicles passing the signal per second is 10, after 10 seconds this frequency reduces to 5, and then automatically the RFID controller sends a command to the signal to turn red. Thus the signal turns red and its adjacent signal in that junction turns green. This process continues in a cycle. Thus dynamic controlling of the signal helps in reducing the wastage of time. This also helps in avoiding traffic congestion as priority is given to a high vehicular traffic road. This system helps in detection of traffic congestion. If the frequency of the vehicles passing the signal per second remains higher than the value set even though

Fig. 1: System Architecture

the maximum value of the timer is reached, then the congestion has occurred at that point. Once the congestion has been detected, the RFID controller can send a message to its preceding signal's controller notifying it to temporarily stop traffic along that stretch. After receiving the message from its successor signal the RFID controller will put ON the red signal for that stretch towards that congested crossing point for a predefined time period. When the congestion is released at the crossing, the respective signal's controller will send another message to its earlier controller indicating to resume the traffic flow again in that direction. Accepting this message the controller of the preceding signal put the red light OFF and green signal ON and restart the signal cycle as before.

4. APPLICATIONS

4.1 Detection and Management of traffic Congestion

In addition to the earlier method of traffic congestion detection, one more method can be used. A server can be maintained which can receive certain crucial data calculated by the Controller of the signals. The main aim is to implement a system that would trace the travel time of individual cars as they pass the roadside controllers and compute an average trip time using a rule-based system to decide whether the area is congested or uncongested. If congestion is sensed then system would control traffic signals / generate automatic re-routing messages to selected approaching vehicles.

4.2 Automatic detection of speed limit Violation

We can use this technique to calculate the speed of a motorist and to detect if he violates the prescribed/set speed limit. If the motorist violates the rule, a warning message will be sent to the motorist via audio and/or video interface and penalty will be calculated in the server and billed monthly to the vehicle owner [14].

4.3 Automatic Billing of Core Area / Toll Charges

collections are also done using the same framework. Controller unit will be placed at toll-booth and along the motor able roads around the core area which will detect each individual vehicle uniquely within its zone by capturing their device ids and will keep records of the time during which the vehicle was seen by those Controllers within its reading zone. This information will be sent to a main server. Accordingly the main server will calculate the charges and raise bills against the vehicle ids [14].

5. CONCLUSION AND FUTURE WORK

The proposed work focuses on Smart Traffic management System using RFID which will eliminate the drawbacks of the existing system such as high implementation cost, dependency on the environmental conditions, etc. The proposed system aims at effective management of traffic congestion. It is also cost effective than the existing system.

Furthermore, the study presents the problems in metropolitan areas all over the world caused by congestions and the related sources. Congestions developed to a problem, which affects economies worldwide. Particularly metropolitan areas are worst hit under these conditions. Congestions have a negative impact on the financial situation of a country, on the environment and hence the overall quality of life. The proposed system can be enhanced by using any other powerful communication network other than GSM.

6. REFERENCES

[1] 21st Century operations Using 21st Century Technologies. U.S Department Of transportation Federal Highway Administration.2008-08-29. Retrieved 2008-09-25. http://www.ops.fhwa.dot.gov/aboutus/opstory.htm

[2] William Beaty. Jan 1998. Traffic Waves —Sometimes one http://www.amasci.com/amateur/traffic/traffic1.html

Is

Timer < Max_green
and timer not 0?
Turn the signal green
Initialize the timer to the
maximum set value
Move to the adjacent signal
Turn signal red
Decrement timer count by 1
Is
Act_freq_count >
Min_freq_count?
Yes
No
No
Yes

22

[3] Dipak K Dash, TNN May 31, 2012. ―India loses Rs 60,000 crore due to traffic congestion: Study‖. Times Of India. http://articles.timesofindia.indiatimes.com/2012-05-31/india/31920307_1_toll-plazas-road-space-stoppage

[4] Azeem Uddin, Draft, 23 March 2009. Traffic congestion in Indian cities: Challenges of a Rising power. http://www.visionwebsite.eu/UserFiles/File/filedascaricare/Scientifci%20Partners,Papers%28Kyoto%29/Draft_koc_Azeem%20Uddin.pdf

[5] FHWA-HRT-06-108. October 2006. Traffic Detector Handbook: Third Edition—Volume I. http://www.fhwa.dot.gov/publications/research/operations/its/06108/

[6] US7245220 B2. Jul 17, 2007. Radio frequency identification (RFID) controller. http://www.google.com/patents/US7245220

[7] Ali, S.S.M.Indian Inst. of Technol. Madras, Chennai, India, George, B.; Vanajakshi L.: A simple multiple loop sensor configuration for vehicle detection in an undisciplined traffic Sensing Technology (ICST), 2011 Fifth International Conference21568065.

http://ieeexplore.ieee.org/xpl/articleDetails.jsp?tp=&arnumber=6137062&url=http%3A%2F%2Fieeexplore.ieee.org%2Fxpls%2Fabs_all.jsp%3Farnumber%3D6137062

[8] FHWA-RD-96-100. July 1995. Detection Technology: IVHSVolume-
1.http://ntl.bts.gov/DOCS/96100/index.html

[9] Bing-Fei Wu. Dept of Electr. And control eng, Nat. Chiao Tung Univ, Hsinchu, Taiwan. A new Approach to Video-based Traffic surveillance using fuzzy hybrid Information Inference Mechanism.March 2013.IEEE IntelligentTraffic Society.
http://ieeexplore.ieee.org/xpl/articleDetails.jsp?arnumber=6264098

[10] Xianbin Cao ; Sch. of Electron. & Inf. Eng., Beihang Univ., Beijing, China ; Changxia Wu ; Jinhe Lan ; Pingkun Yan : Vehicle Detection and Motion Analysis in Low-Altitude Airborne Video Under Urban Environment Circuits and Systems for Video Technology, IEEE Transactions on (Volume:21 , Issue: 10) 1051-8215http://ieeexplore.ieee.org/xpl/login.jsp?tp=&arnumber=5955106&url=http%3A%2F%2Fieeexplore.ieee.org%2Fxpls%2Fabs_all.jsp%3Farnumber%3D5955106

[11] Hussain, T.M. ; Dept. of Electr. Eng., City Univ. of New York, NY, USA ; Saadawi, T.N. ; Ahmed, S.A.: Overhead infrared sensor for monitoring vehicular traffic:Vehicular Technology, IEEE Transactions on (Volume:42 , Issue: 4) 0018-9545
http://ieeexplore.ieee.org/xpl/login.jsp?tp=&arnumber=260764&url=http%3A%2F%2Fieeexplore.ieee.org%2Fxpls%2Fabs_all.jsp%3Farnumber%3D260764

[12] Bichlien Hoang,Ashley Caudill: EEE Emerging Technology portal, 2012
http://www.ieee.org/about/technologies/emerging/rfid.pdf

[13]http://en.wikipedia.org/wiki/Radio-frequency_identification

[14] Wang Hongjian ; Chongqing Special Equip. Quality Safe Inspection Center, Chongqing, China ; Tang Yuelin ; Li Zhi RFID Technology Applied in Highway Traffic Management 978-1-4244-8683-0. Optoelectronics and

Image Processing (ICOIP), 2010 International Conference on (Volume: 2) http://ieeexplore.ieee.org/xpl/login.jsp?tp=&arnumber=5 663108&url=http%3A%2F%2Fieeexplore.ieee.org%2Fx pls%2Fabs_all.jsp%3Farnumber%3D5663108

- ... It is just like increment of population every second. Traffic congestion [1] represents a negative impact or effect on the economy, health due to pollution, environments, and as well as on quality of life. ...

  Congestion Free Analysis for Emergency Vehicles Response in Tri-City (Panchkula-Chandigarh Mohali) Using LTE-A

  Article

  Full-text available

  o Jan 2018
  o

  Pushparaj Pal

  o Lalita Pali

  ViewShow abstract

- ... In the past few years or earlier years of internet ages, the working process in universities and governments was by using paper documents and lots of printed sheets that was led to consume a large amount of wasting papers. However, there was a lot of demand by people to accomplish their working task at offices even though consuming a lot of wasting papers [12,13].In addition to wasting papers, the old version made people visit their organizations to finish

their work, which means people should transport from long distance using cars and sometimes the place is distant that take a long time to reach .And the most important advantages of the systematic process is to reduce the amount of visiting people to the organization places and creating crows on the place and making dawdling of the working process [14,15]. ...

[An Approach for Receiving Final Year Grade Via an Online System for Bachelor Students, Universities Case Study: university of Sulaimani-College of Dentistry](#)

Article

Full-text available

- o Sep 2019
- o Miran Hikmat Mohammed
- o

  Roshna Muhamad

  ViewShow abstract

- ... Smart transportation facilitates transportation activates via smart technologies and decreases energy costs in transportation using optimal and adequate design of the roads and connections with the intelligent signaling and routing [19], [20]. ...

  [Possible Contributions of Smart Grids to Regional Development of Countries](#)

  Conference Paper

  Full-text available

  - o Sep 2018
  - o

Asim Kaygusuz

o

Özge Tuttokmaği

o

Cemal Keles

o Barış Baykant Alagöz

[View]Show abstract

- **Intelligent traffic controller**

  Article

o Nov 2019
o

Sachin Kumar

o Anupam Baliyan

o Anurag Tiwari

o Balram Jaiswal

[View]Show abstract

- **Dynamic Routing of Traffic Based on Greenhouse Gases**

[Measurements](#)

- [Real-Time Adaptive Traffic Signals Using Rate-Monotonic Scheduling](#)

  Article

  Full-text available

- [IoT for 5G/B5G Applications in Smart Homes, Smart Cities,](#)

[Wearables and Connected Cars](#)

Conference Paper

- Sep 2019
- Hasna Uddin

- Marcia Gibson

- Ghazanfar Ali Safdar

Muhammad Ali Imran

View

- [A Comparative Study on Road Safety Problems](#)

  Conference Paper

  - Dec 2018
  - M. Divyaprabha

  Thangavel Murugan

  P. Varalakshmi

  View

- [Research and Analysis on the Top Design of Smart Railway](#)

Article

Full-text available

o Apr 2019

o [J Phys Conf](#)
o Shaofu Lin

o Yafang Jia

o Sibin Xia

View

- [Research on the evaluation index system of intelligent railway passenger station](#)

  Article

  Full-text available

o Apr 2019

o [J Phys Conf](#)
o Shaofu Lin

o Qianwen Wei

o Sibin Xia

View

- Show more

Recommended publications

Article

[EUROPE'S EMERGING TRAJECTORY-BASED ATM ENVIRONMENT](#)

- [Keith D. Wichman](#)

- [Lars Lindberg](#)

- [Ludwig Kilchert](#)

-

  [Okko F. Bleeker](#)

  The Air Traffic Management environment emerging in Europe will make heavy use of a time- based architecture managing shared 4D trajectories generated by aircraft Flight Management Systems (FMS). The overarching objective is to improve the efficiency of air transport from check-in to check- out. This will be accomplished via a controllable flow established in a collaborative manner between the ... [Show full abstract]

  [Read more](#)

  [The Evolution of the SCATS and the Environment Study](#)

- [Christian Chong-White](#)

- [Gareth Millar](#)
-

  [Fraser Johnson](#)

- [Steven Shaw](#)

  This paper explains the evolution of a running study titled 'SCATS and the Environment' (SatE) by the Roads and Traffic Authority of New South Wales (RTA) (NSW). SCATS is a comprehensive traffic management system that provides adaptive traffic control, amongst other functionality. The SatE study is tasked to rigorously demonstrate the transport, environmental and economic value that the SCATS ... [Show full abstract]

  [View full-text](#)

  Article

A Study of Driving Cycle for Electric Special-purpose Vehicle in Beijing
May 2017 · Energy Procedia

- Fei Zhang

- Fen Guo

- Hong Huang

In this paper, the driving cycle of electric special-purpose vehicle in Beijing is investigated. Firstly a reasonable experimental scheme is made, in which several electric van trucks are selected to represent the special-purpose vehicle. A new type of data collection transmission and management system based on GPRS communication is used. Then the obtained data is preprocessed and divided into ... [Show full abstract]

View full-text

Conference Paper

The impact of GSM-R on railway capacity
August 2008

- D.N./ Jansen

- Sebastian Georg Klabes

- E. Wendler

The operation of railway systems strongly depends on the underlying train

Intelligent Traffic Monitoring System (ITMS)

Abstract

The present paper describes an Intelligent Traffic Monitoring System (ITMS). The system at least comprises of a traffic control center, a traffic information service center, a cellular mobile communication system and an in-vehicle terminal (GPS tracer), which are connected with each other via a wireless communication network (satellites/telecom towers). The in-vehicle terminal communicates with the traffic control center and the traffic information service center respectively via the cellular mobile communication system (satellite/telecom towers). By adopting the intelligent traffic monitoring system, its installation and construction cost will be reduced substantially. In this paper, the same conventional traffic signal lights would be provided with a "smart-box" to perform real time smart switching ON/OFF (which reduces the cost of installation due to the utilization of same existing traffic lights facility). This

smart box is connected to a traffic control center which in turn receives real time data from satellites/telecom towers to track different vehicles through electronic/E number plates (aided with GPS Tracker). This will not only help in tracing the vehicle for traffic management, automatic toll/parking fee deduction and interstate tourism tax deduction but also will manage to store additional data (complete registration details of the vehicle), help in theft detection, a green monitor for regulating carbon emission in the city by synchronizing to the database of pollution checking central office, etc. In multilane network, this system identifies the traffic density in each lane which will get clearance priority signal from the real time system as per the needed traffic density clearance requirement guided by the priority algorithm criterion of clearing the Corresponding Authors: 1. Mr. Pavleen Singh Bali, densest lane first and so on. Therefore, allotted clearance time will be proportional to the density of the traffic of each lane in this multilane network traffic clearance system.
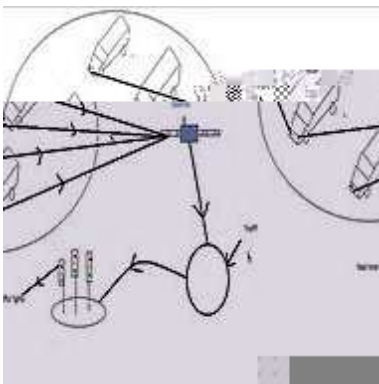
Tracking of Vehicle using GPS Tracer in E Number Plate The present

paper further suggests an in vehicle terminal used in an intelligent traffic system and a method for realizing an intelligent traffic system with a cellular mobile communication system. By adopting the intelligent traffic system, its construction cost will be reduced greatly. In this invention the same conventional traffic lights would be provided with a smart box [6] to perform real time switching (which would reduce cost of installation). This smart box is in turn connected to traffic control center which in turn receive real time data from satellites which track different vehicles through electronic number plate (aided with GPS Tracker). Efficient & Cost Effective Traffic Monitoring System by Real Time Switching (ON/OFF) of Smart Traffic Lights.
...
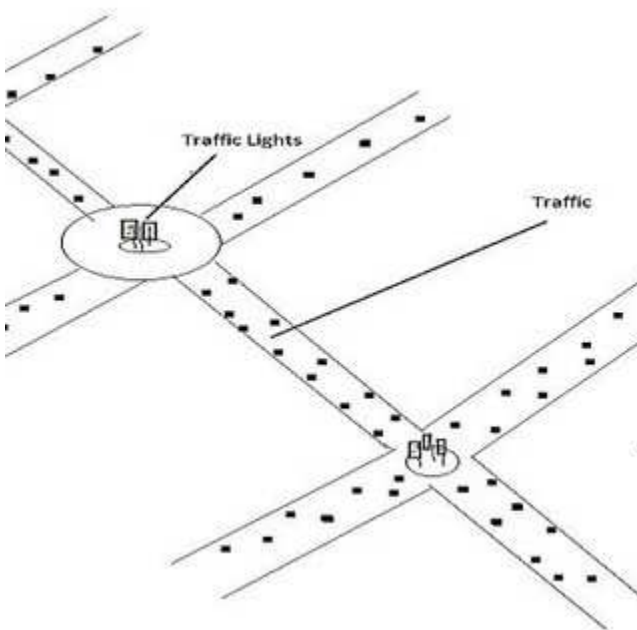
4 Lane cross section of the road.
...
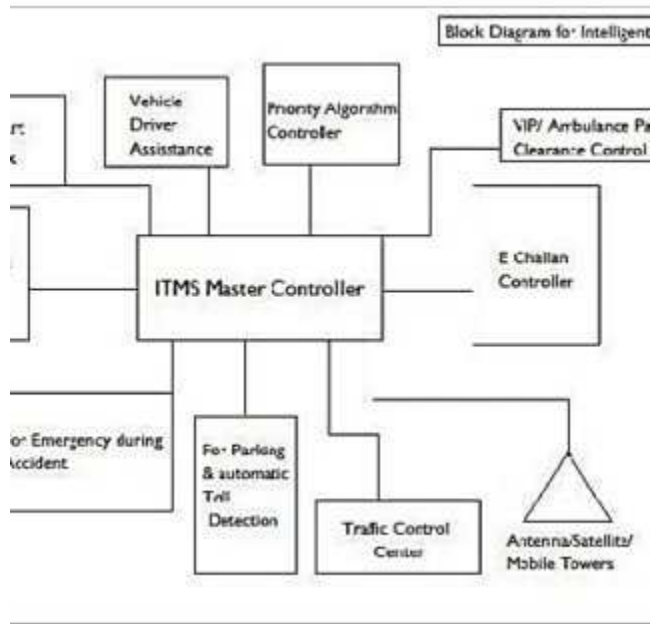
Block Diagram for Intelligent Traffic Monitoring System
...