



Main PCB v2 - fully routed, both layers (top view)

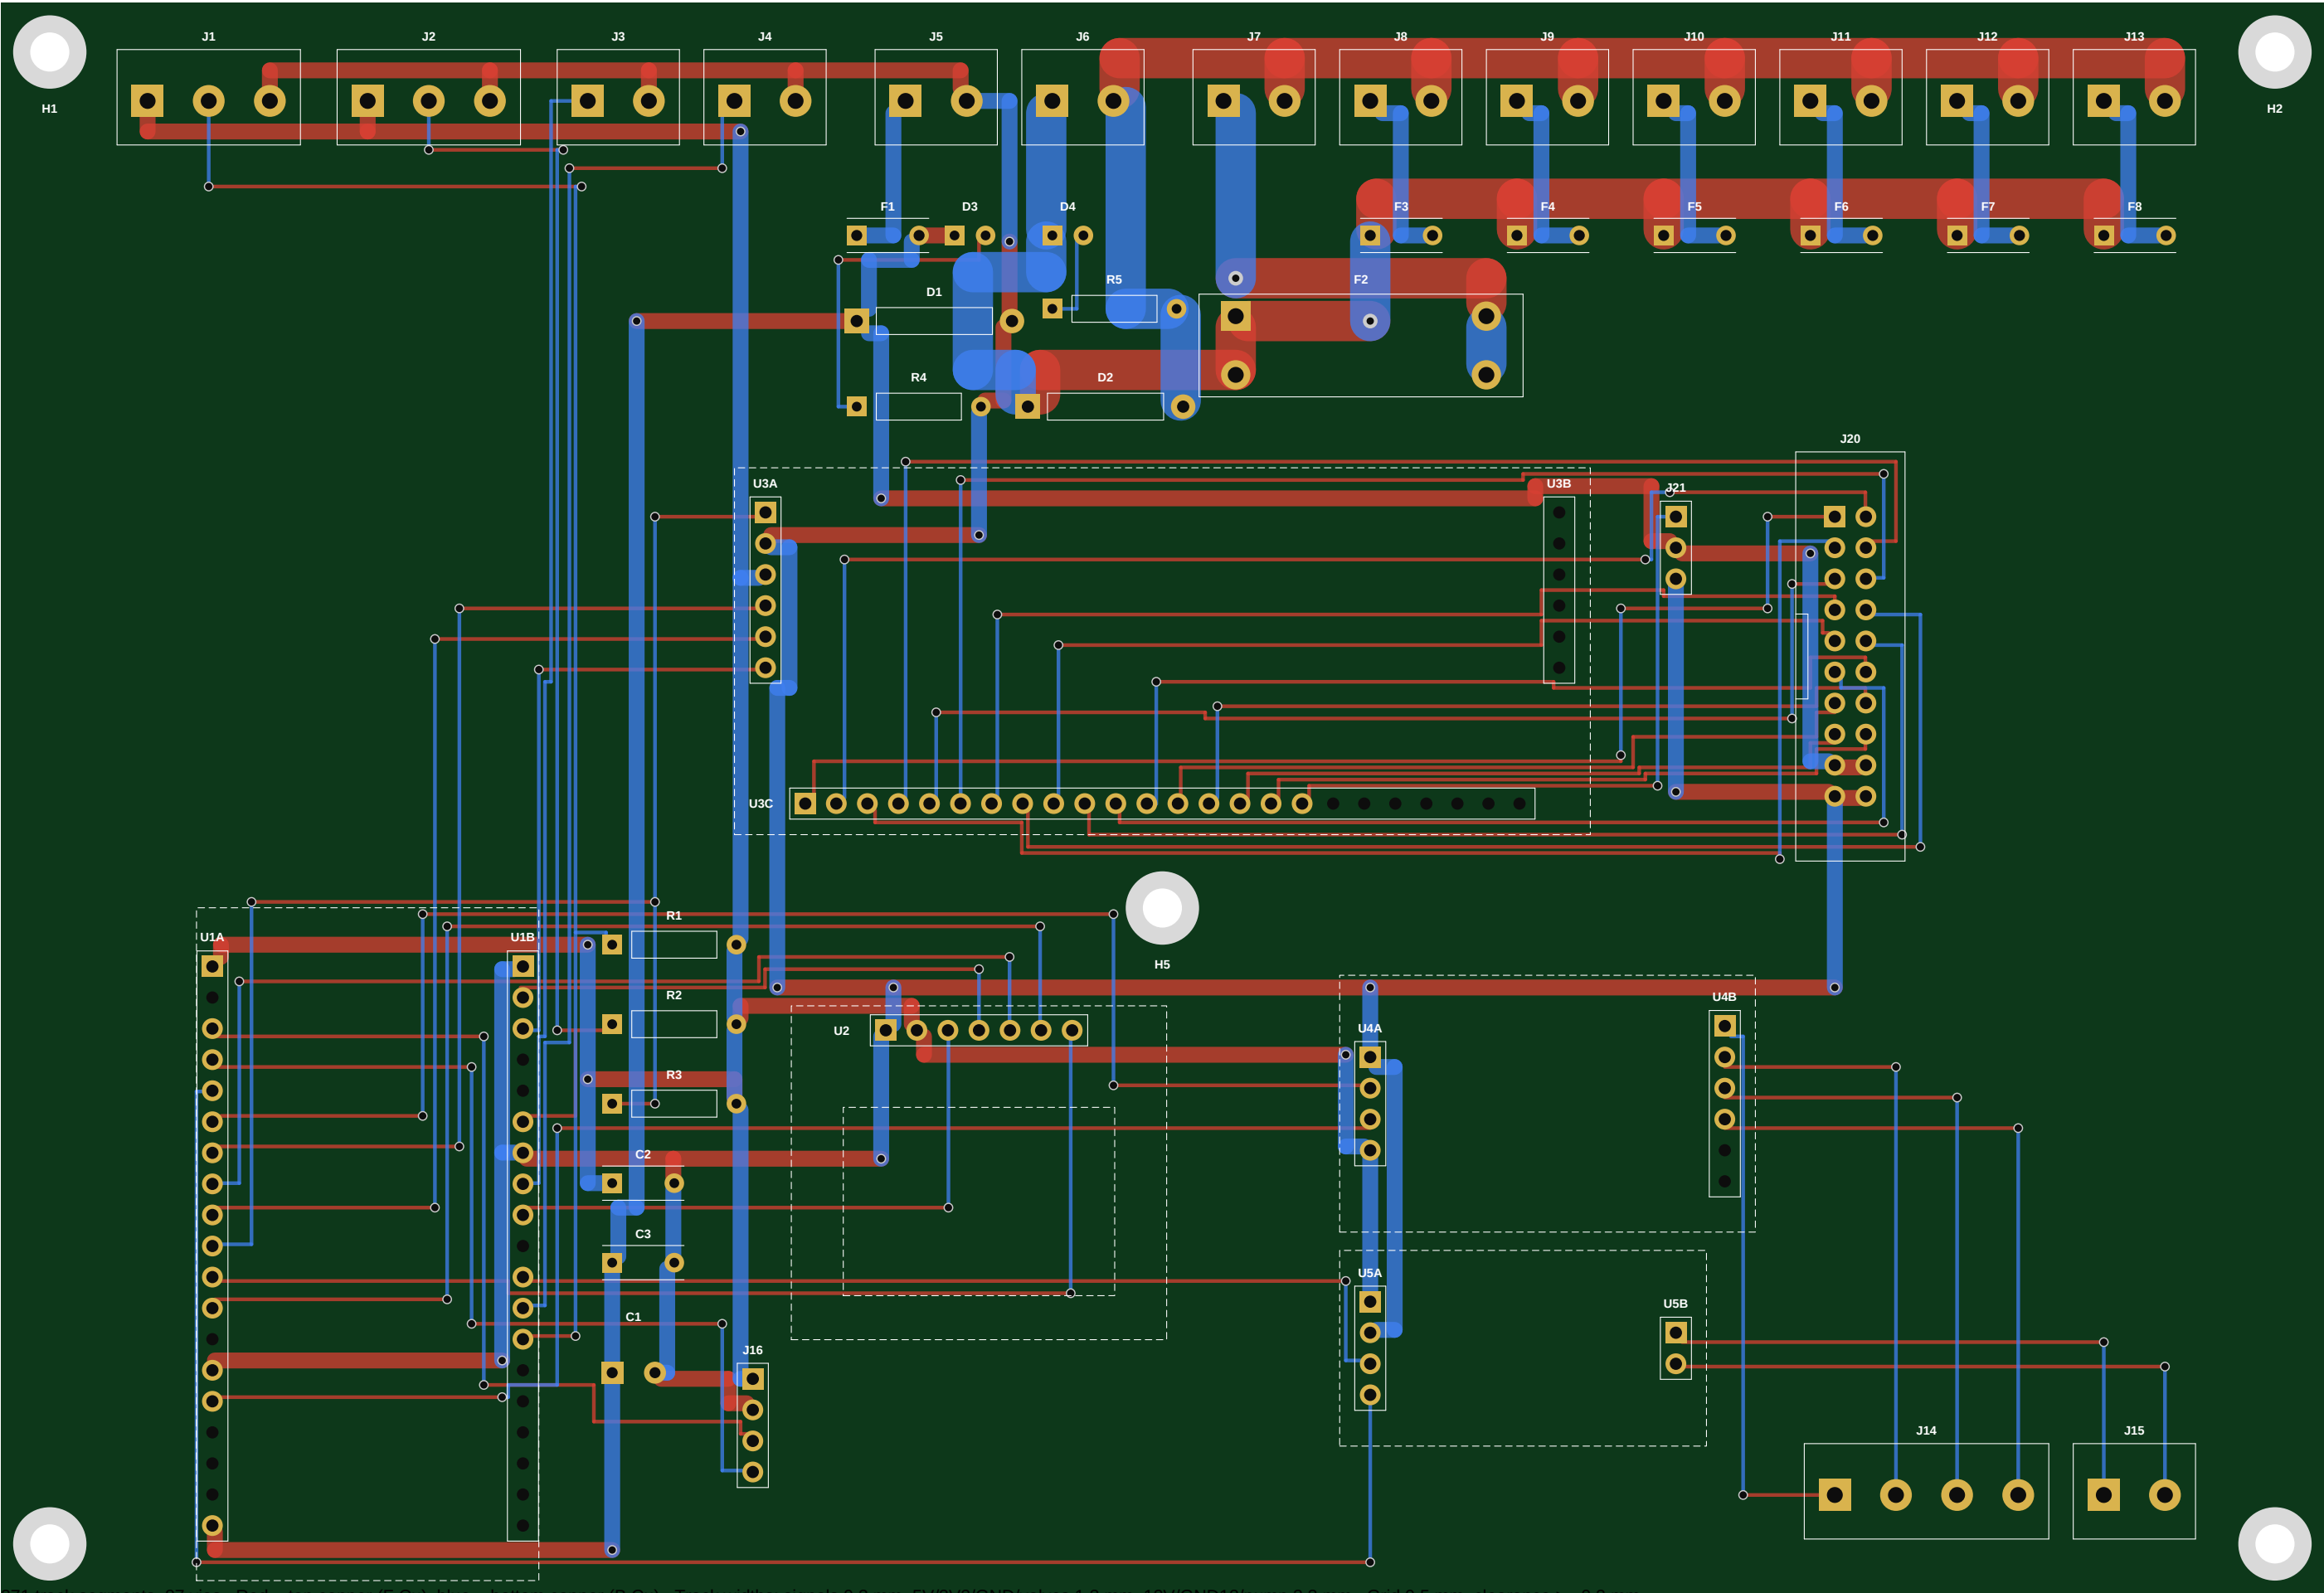

371 track segments, 87 vias. Red = top copper (F.Cu), blue = bottom copper (B.Cu). Track widths: signals 0.3 mm, 5V/3V3/GND/valves 1.3 mm, 12V/GND12/pump 3.3 mm. Grid 0.5 mm, clearance >= 0.2 mm.

Viewed from the TOP (component side). Module sizes are ASSUMED - re-route after measuring.


Main PCB v2 - TOP layer (F.Cu) + silkscreen

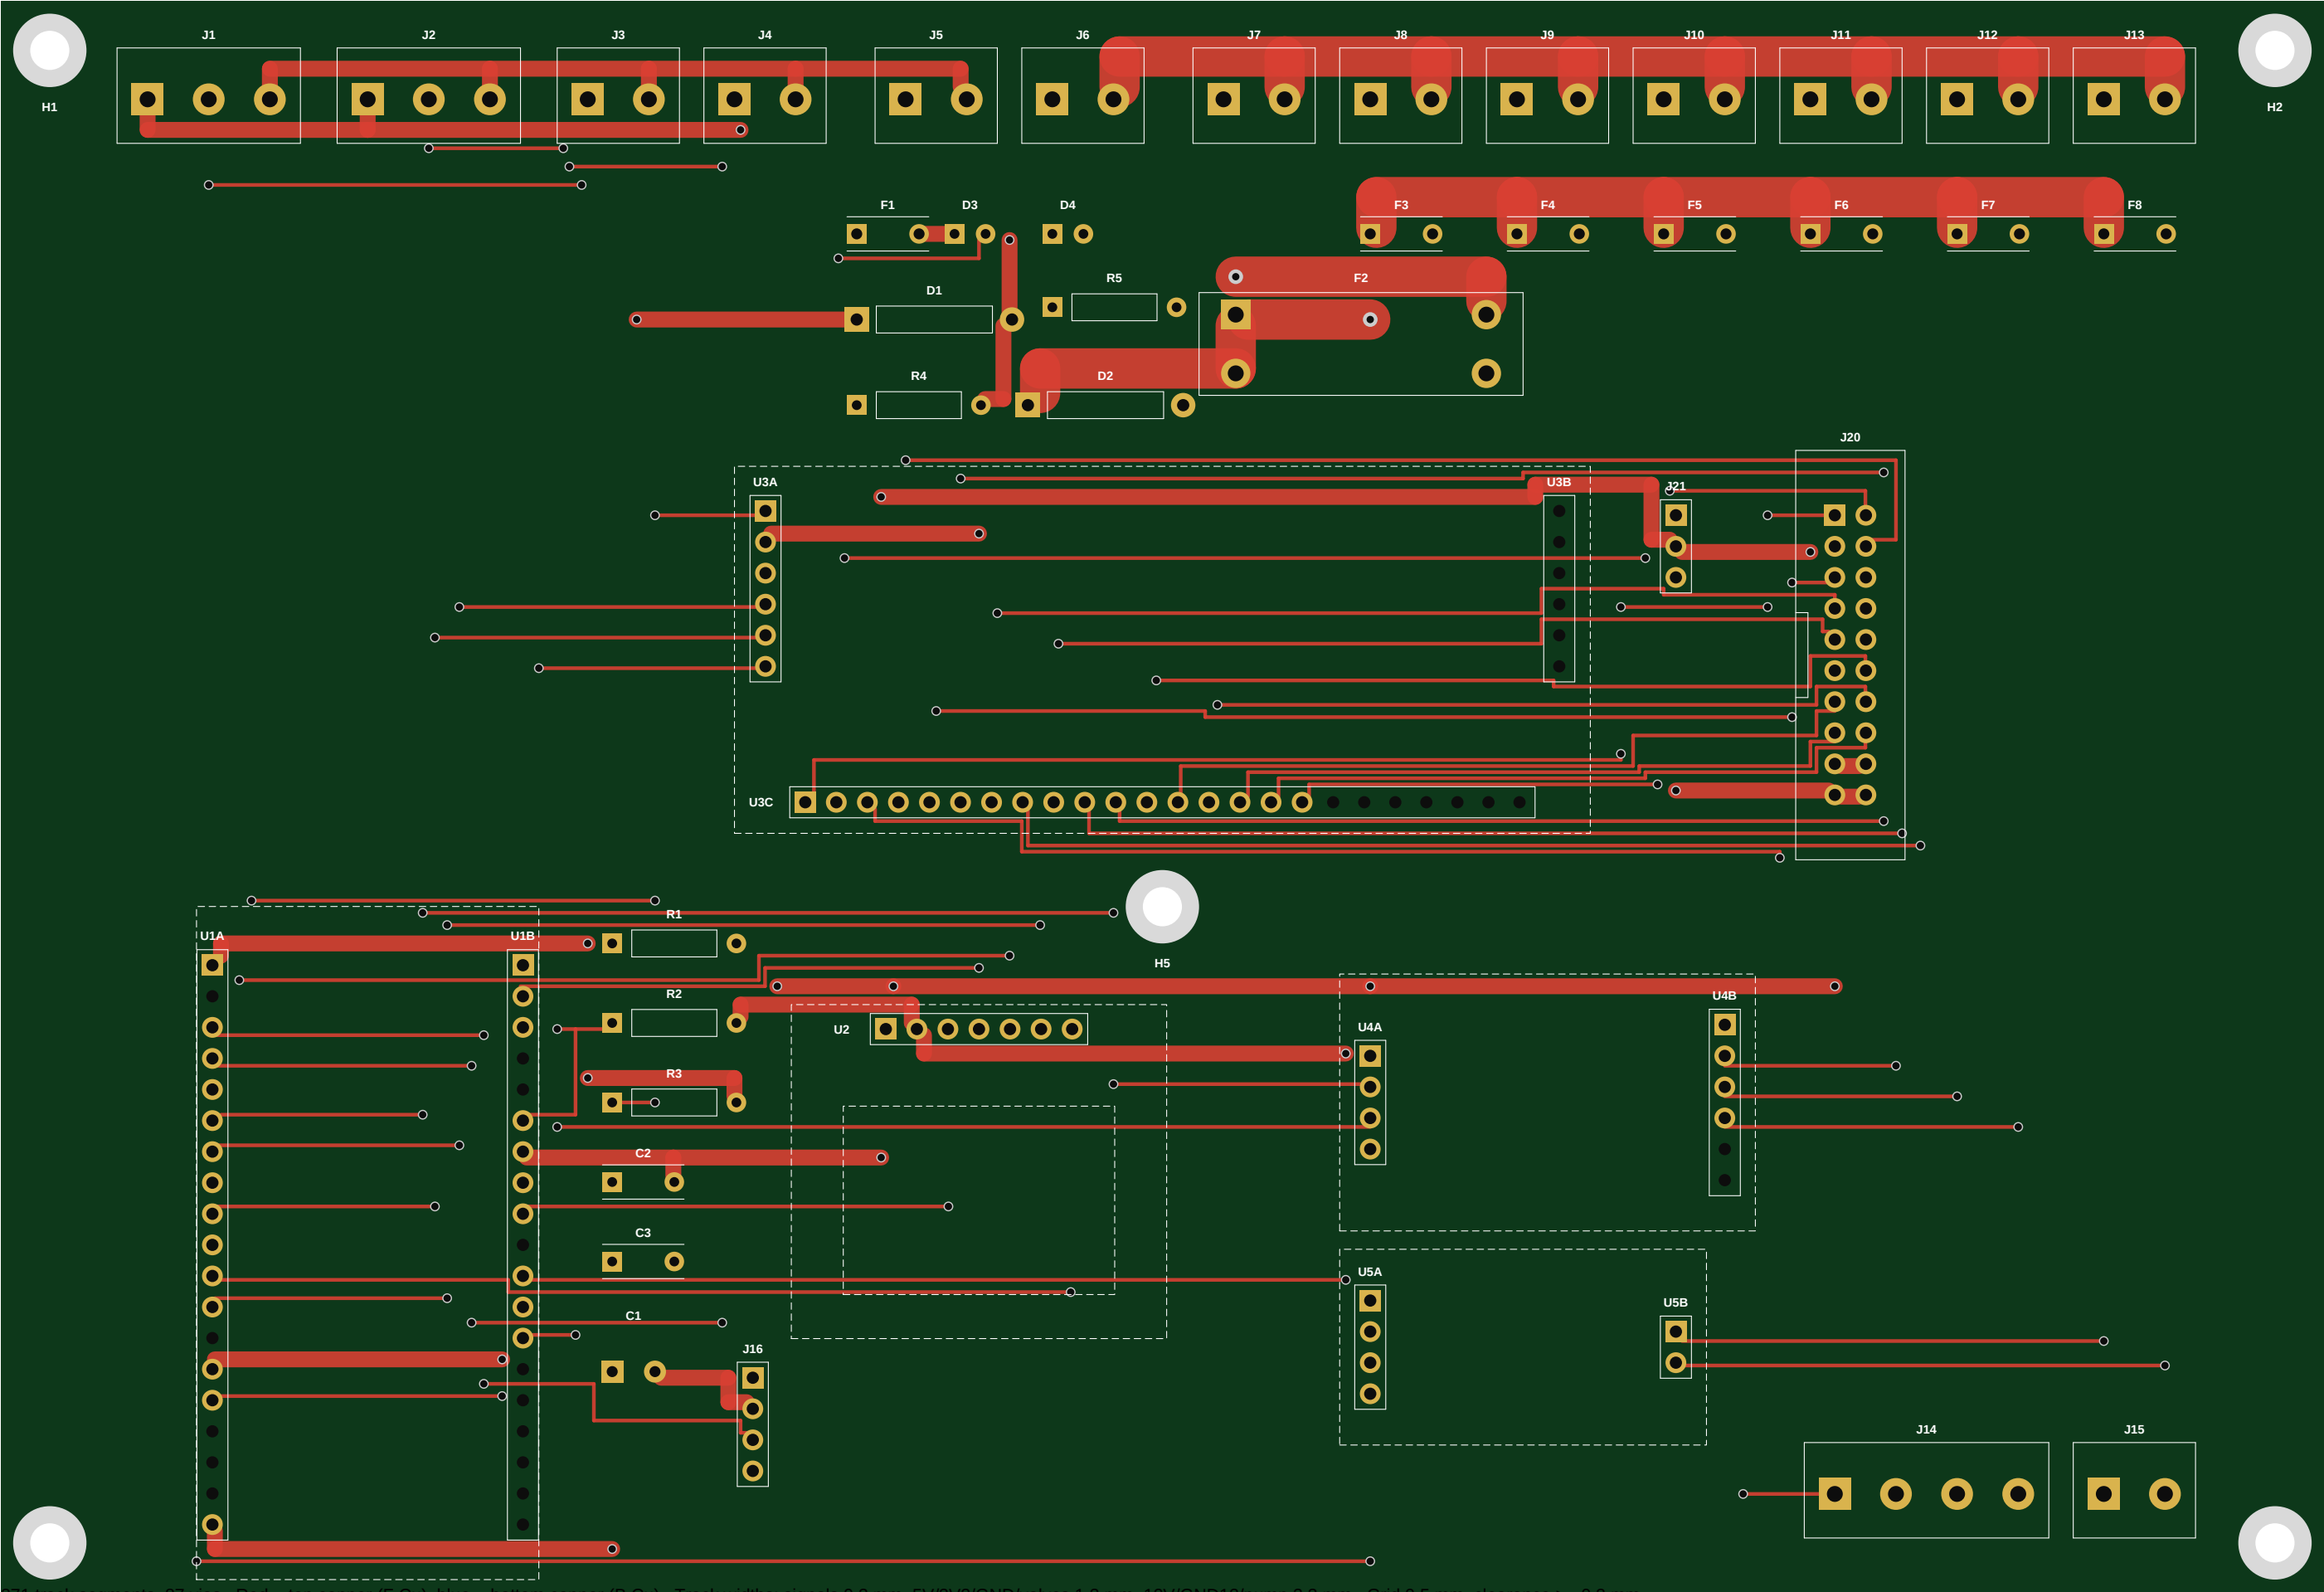

371 track segments, 87 vias. Red = top copper (F.Cu), blue = bottom copper (B.Cu). Track widths: signals 0.3 mm, 5V/3V3/GND/valves 1.3 mm, 12V/GND12/pump 3.3 mm. Grid 0.5 mm, clearance >= 0.2 mm.

Viewed from the TOP (component side). Module sizes are ASSUMED - re-route after measuring.

Main PCB v2 - BOTTOM layer (B.Cu), seen from below

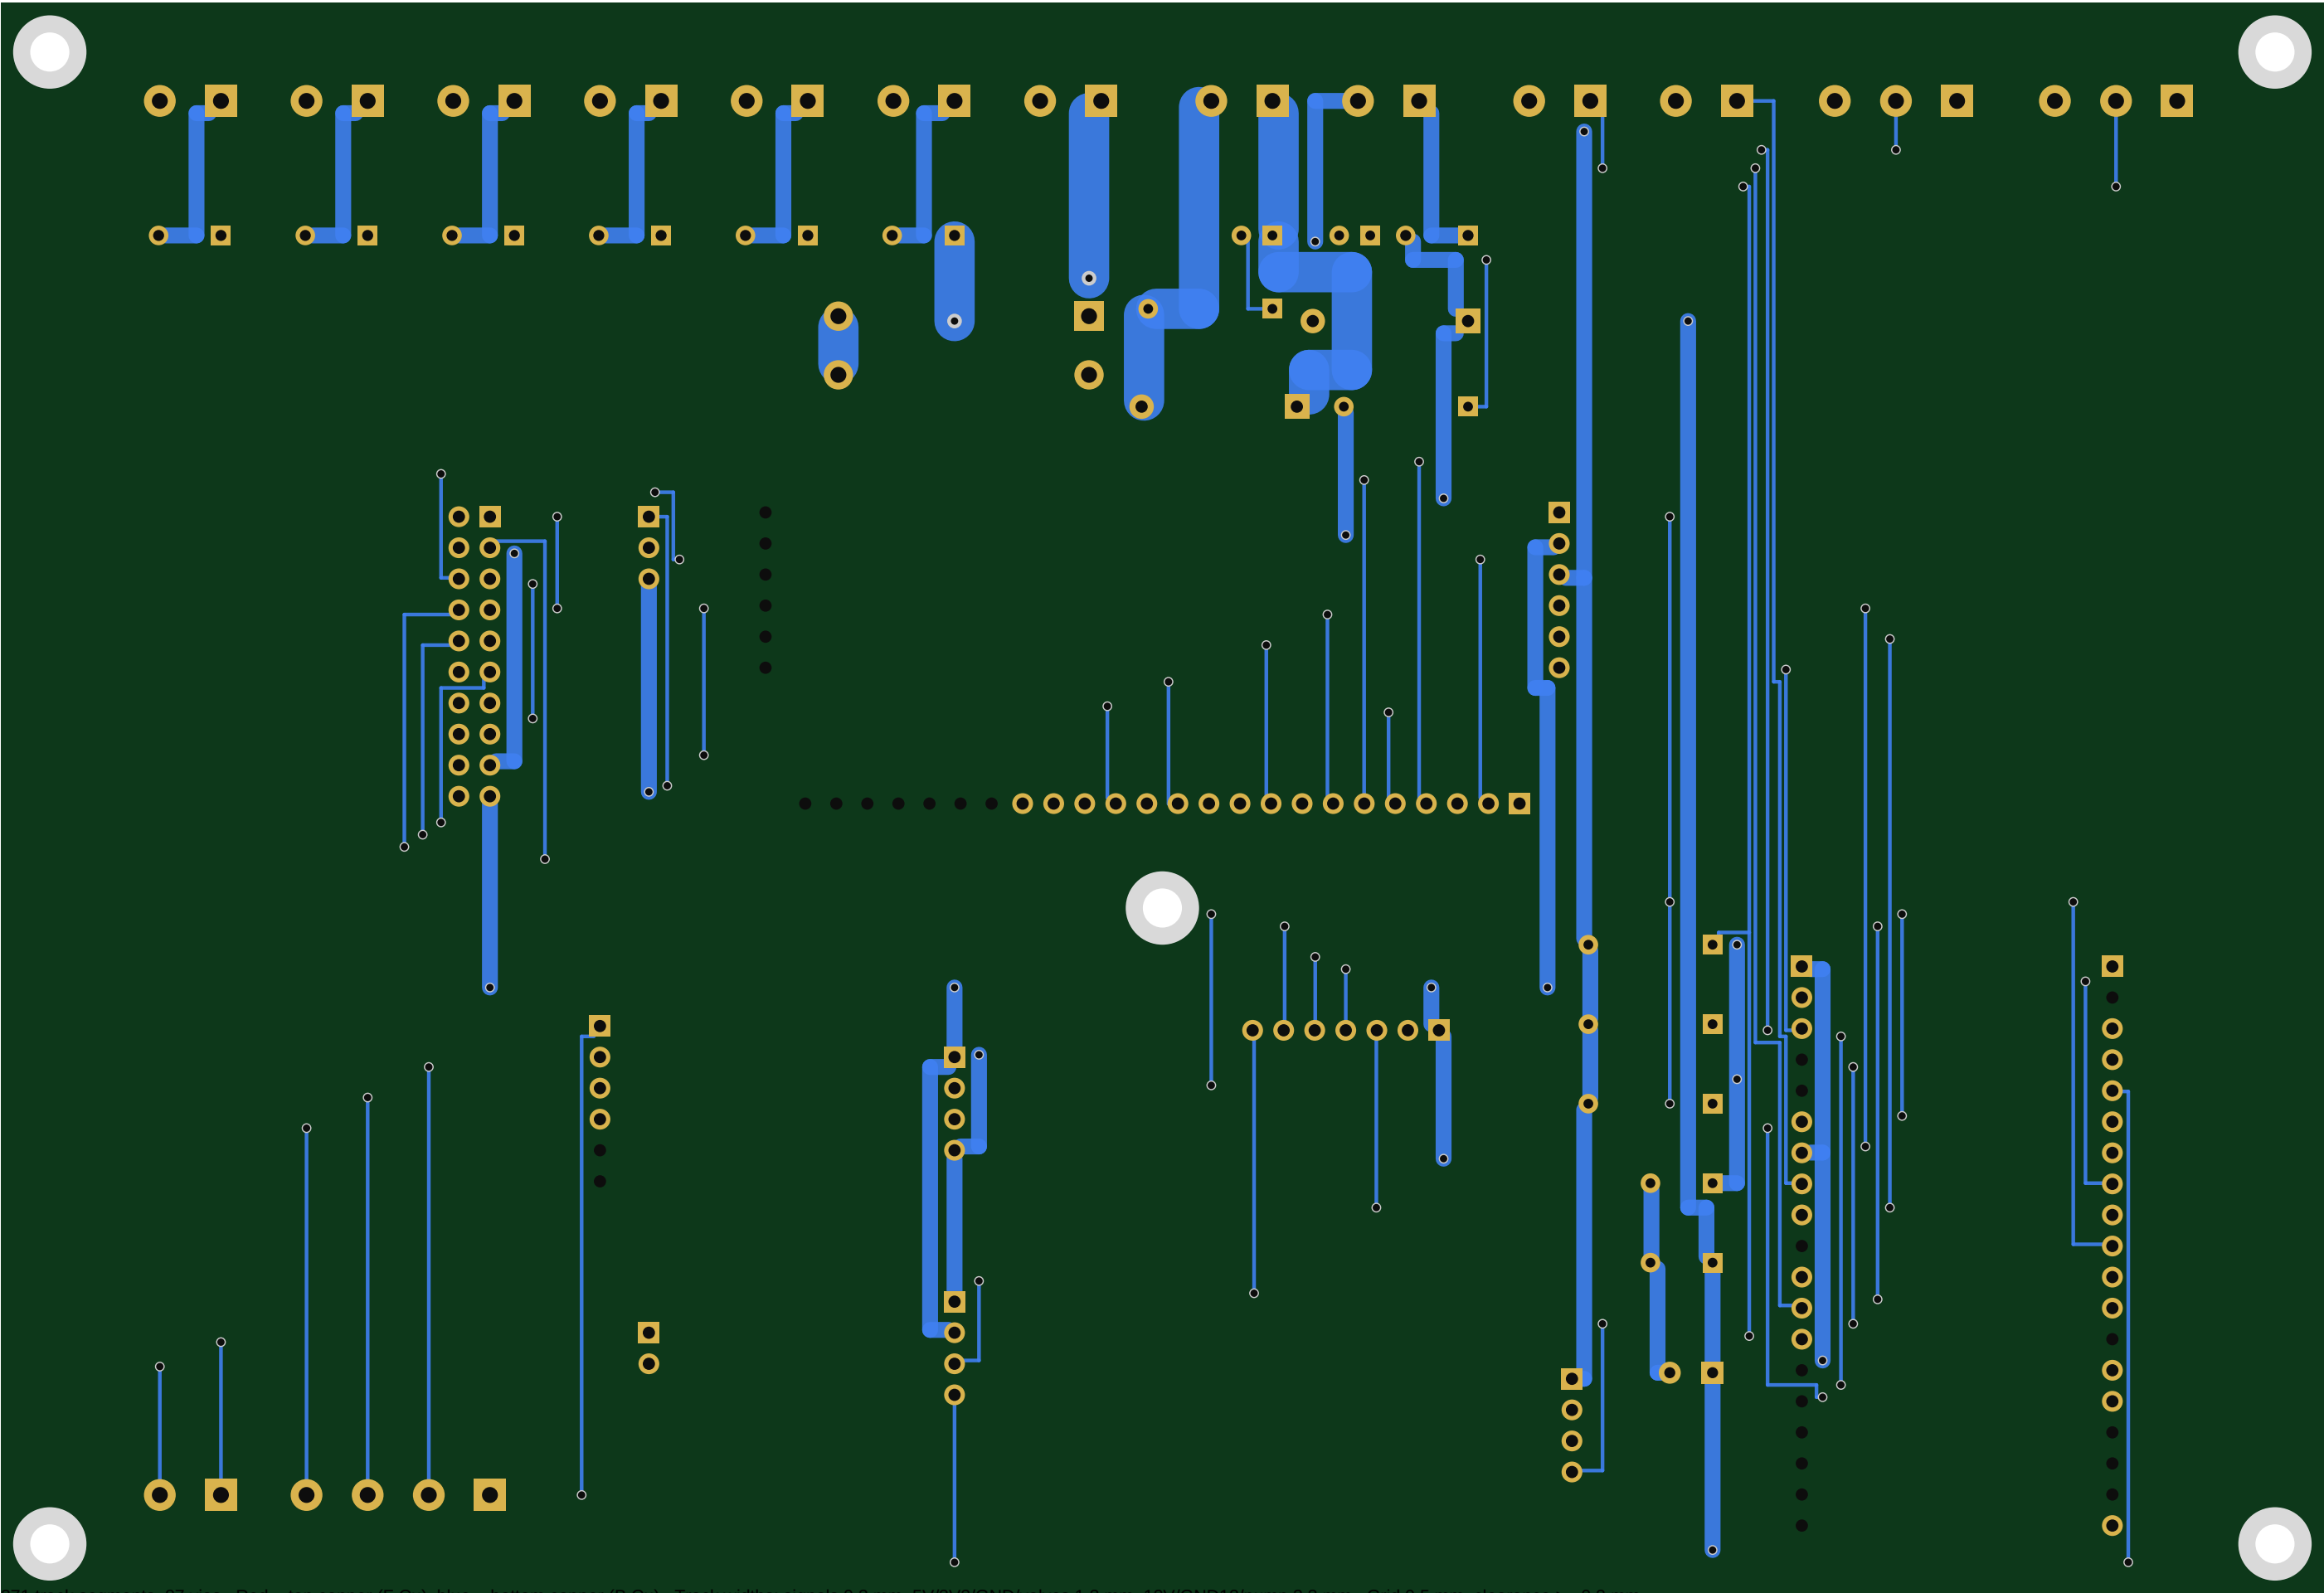

371 track segments, 87 vias. Red = top copper (F.Cu), blue = bottom copper (B.Cu). Track widths: signals 0.3 mm, 5V/3V3/GND/valves 1.3 mm, 12V/GND12/pump 3.3 mm. Grid 0.5 mm, clearance >= 0.2 mm.

Viewed from the BOTTOM (mirrored left-right). Module sizes are ASSUMED - re-route after measuring.